

1969
Grady-White
Brochure

Pamlico 16'



MODEL 1166

SPECIFICATIONS

Gunwale length	17'6"
Center line length	16'6"
Beam amid	79"
Depth forward	34"
Transom width	76"
Transom depth	20"
OBC certified H.P. to	125
Average weight	890 lbs.

OPTIONAL EQUIPMENT

- Top and Side Curtains
- Aft Curtain
- Mooring Cover
- 12 Gallon Bow Tank

STANDARD EQUIPMENT — Pre-formed plexiglass wrap around windshield with ventilation louvre. Three-position loungeseats and footrest. Deluxe vinyl interior including padded side storage areas and color keyed flooring. Mechanical steering, approved lighting and ventilated rear storage area with drop curtain. Bow and stern cleats. Anodized aluminum gunwale molding with vinyl insert.

Capri i/o 17'



STANDARD EQUIPMENT — Welded heavy duty anodized aluminum windshield (skiff type walkthru) with tinted tempered glass. Deluxe top with side curtains. Two back to back sun lounge seats. Snap on vinyl walk-thru cover. Vinyl cockpit floor with full hull liner. Full length storage shelf. Glove compartment with lock. 15" single trumpet horn. Motor well with storage beneath. Approximate 18 gallon gasoline tank. Custom hardware consisting of: stainless steel bow and pad eyes; two forward and two aft cleats. Bow and stern light wired to a switch. Anodized aluminum gunwale molding with vinyl insert. Anodized Bow Rails. Approved ventilating system.



MODEL 1174

SPECIFICATIONS

Center line length	17'1"
Beam Amid	82"
Depth forward	36"
Transom width	76"
Transom depth	28"
OBC Certified H.P. to	140
Average Weight	1810 lbs.

OPTIONAL EQUIPMENT

- Aft Curtain
- Mooring Cover

DEALER:

Capri 17'

MODEL 1175

SPECIFICATIONS

Center line length	17'1"
Beam Amid	82"
Depth forward	36"
Transom width	76"
Transom depth	20"
OBC Certified H.P. to	125
Average Weight	1200 lbs.

OPTIONAL EQUIPMENT

- Aft Curtain
- Mooring Cover



STANDARD EQUIPMENT — Welded heavy duty anodized aluminum windshield (skiff type walkthru) with tinted tempered glass. Deluxe top with side curtains. Two back to back sun lounge seats. Glove compartment with lock. Vinyl cockpit floor with full hull liner. Full length storage shelf. Wet bait well forward of windshield covered with a teak grill. Motor well with storage beneath. Fold up table covered with tan Irish linen vinyl in front of motor well. Approximate 18 gallon gasoline tank. Custom hardware consisting of: stainless steel bow and pad eyes; two forward and two aft cleats. Bow and stern light wired to a switch. Anodized aluminum gunwale molding with vinyl insert. Anodized Bow Rails. Approved ventilating system.

Juniper 18'



MODEL 1195

SPECIFICATIONS

Gunwale length	19'6"
Center line length	18'1"
Beam Amid	86½"
Depth forward	48"
Bottom degree	21°
Transom width	6'6"
Transom depth	3'5"
OBC certified H.P. to	200
Approximate Weight	2045 lbs.

OPTIONAL EQUIPMENT

- Top and Side Curtains
- Aft Curtain
- Mooring Cover
- Jump Seats
- Windshield Wiper

STANDARD EQUIPMENT — All welded heavy gauge aluminum ventilating windshield with automotive type safety glass. Enclosed storage compartment forward. Two back to back sun lounge seats with optional jump seats. Glove compartment with lock. Side cockpit liners with storage behind Vinyl covered cockpit deck. Insulated engine box. Mechanical steering, tachometer, oil gauge or light, temperature gauge or light, ampmeter and approximate fuel gauge. Bilge pump and bilge blower. Approximate 24 gallon fuel tank and approved ventilation system. Custom hardware group consisting of forward cleats, bow eye, two aft deck cleat and combination pad eyes and ski-tow eyes. Anodized bow rail, and rear style rails. Heavy anodized aluminum gunwale molding with vinyl insert. International lights. 15" single trumpet horn. Standard power 120 H.P. 1/O. Other options available.

Striper Cabin 19'



MODEL 1119 — C

SPECIFICATIONS

Gunwale length	20'8"
Center line length	19'1"
Beam amid	8'0"
Depth forward amid	50"
Transom width	84½"
Transom depth	37"
Length of Bunks	6'6"
Length of Cabin	8'6"
Head Room	53"
Cockpit area	35 sq. ft.
OBC certified H.P. to	125
Average weight	1740 lbs.

OPTIONAL EQUIPMENT

- Top and Side Curtains
- Aft Curtain
- Mooring Cover
- Marine Head
- Ice Box
- Helm Seat (Companion)
- 12 Gal. (Approx.) Gas Tank
- Windshield Wiper



STANDARD EQUIPMENT — All welded anodized aluminum ventilating flybridge windshield. Automotive type safety glass used in all windshields. Bow rail. Ventilating side cabin windows. Formica topped sink compartment aft of bunk on port side, complete with fresh water system and storage beneath. Starboard side formica topped, combination work table and storage compartment with ice box optional. Attractive vinyl covered 3" foam bunk cushions. Upholstered helms seat with foot rest. Vinyl covered cockpit deck. Cockpit liners with storage area behind. Nonskid textured fiberglass decks accentuated with teak trim. Attractive wooden louvered bulkhead door. Heavy anodized aluminum gunwale molding with protective vinyl inserts. Custom hardware group consisting of: Bow and Stern lights wired, bow eye, forward deck cleat, aft deck cleats and bow chocks. Combination pad eyes and ski-tow eyes. Approved fuel ventilation systems.

WARRANTY

National Boat Works, Inc. warrants to the original purchaser, each boat manufactured by National Boat Works, Inc., to be free of defects in material and workmanship for a period of one year from date of purchase, when purchased from an authorized dealer.

Excluded from this warranty are engines, outdrives, propellers, controls, mechanical steering, bilge pumps and any other part expressly warranted by the manufacturer thereof. Also excluded are gel coats, chrome, windshields, glass breakage, and upholstery.


Boats subjected to misuse, abuse, negligence, or used for racing are expressly excluded from this warranty.

Any repairs authorized by our factory in writing will be repaired at the factory in Greenville, North Carolina or at our option by our authorized dealer. Transportation charges to and from the place of repair will be the responsibility of the owner.

National Boat Works, Inc. reserves the right to make changes in design and materials without being obligated to incorporate such changes in products manufactured prior to incorporation of such changes.

MANUFACTURING FACILITIES

The most modern equipment and techniques are employed in the manufacture of GW fiberglass boats. Mold room methods include all hand lay-up with alternating layers of roving and mat that overlap at the keel and stress areas. All wood reinforced areas are completely glass covered to insure sealed air flotation compartments. With a production area of over 160,000 sq. ft., all boats move through neat production lines which promote high quality workmanship. All gel coats, vinyls, raw materials and hardware are of the finest available.

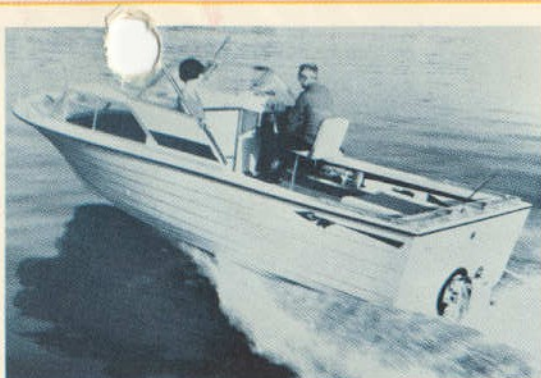

MODEL 1121 — C

SPECIFICATIONS

Gunwale length	22'9½"
Center line length	21'4"
Beam Amid	8'0"
Depth forward amid	42"
Transom width	6'9½"
Length of bunks	6'6"
Length of cabin	8'6"
Head room	54"
Cockpit area	58 sq. ft.
OBC certified H.P. to	200
Average weight	2605 lbs.

OPTIONAL EQUIPMENT

- Top and Side Curtains
- Aft Curtain
- Mooring Cover
- Jump Seats
- Marine Head
- Ice Box
- Helm Seat (Companion)
- Windshield Wiper

Nassau Cabin 21'



STANDARD EQUIPMENT — All welded heavy gauge anodized aluminum ventilating flybridge windshield. Automotive type safety glass used in all windshields. Ventilating side cabin windows. Formica topped sink compartment aft of bunk on port side, complete with fresh water system and storage compartment with ice box optional. Attractive vinyl covered 3" foam bunk cushions. Upholstered helmseat. Vinyl covered cockpit deck. Cockpit liners with storage area behind. Non-skid textured fiberglass decks accentuated with teak trim. Attractive wooden louvered bulkhead door. Heavy anodized aluminum gunwale molding with protective vinyl insert. Custom hardware group consisting of bow eye, bow rail - stern rail, international lights, forward mooring bit, aft deck cleats and bow chocks. Combination pad eyes and ski-tow eyes. Approximate 36 gallon fuel tank. Bilge pump. 15" single trumpet horn. Approved fuel ventilation system. Standard power 120 H.P. Other options available.



MOLD ROOM



RIGGING AREA



FINAL ASSEMBLY

Chowan Cuddy—21'



MODEL 1121

SPECIFICATIONS

Gunwale length	22'9½"
Center line length	21'4"
Beam amid ships	8'0"
Depth forward	42"
Transom width	6'9½"
Transom depth	42¾"
Length of Bunks	6'2"
Length of Cabin	7'10"
Head Room	4'0"
Cockpit area	60 sq. ft.
OBC certified H.P. to	200
Average weight	2590 lbs.

OPTIONAL EQUIPMENT

- Top and Side Curtains
- Aft Curtain
- Mooring Cover
- Jump Seats
- Marine Head
- Windshied Wiper



STANDARD EQUIPMENT — Welded heavy duty anodized aluminum windshield (skiff type ventilating) with tinted tempered glass. Cuddy cabin with full size vee berth for two persons and 3" foam cushions. Attractive wooden louvered cabin door with companionway hatch. Seats pedestal mounted for comfort and fishing with footrests. Vinyl covered cockpit floor. Hull side liners (vinyl) with full length storage shelf. Forward deck hatch. Cockpit trim - natural teak and anodized aluminum moldings. Approximate 36 gallon fuel tank. Bilge pump. Bilge blower. 15" single trumpet horn. Approved ventilation system. Custom hardware consisting of: stainless steel bow and pad eyes, forward and aft cleats, anodized bow and side rails. International light with cabin light. Std. power - 120 H.P. I/O with binnacle mount throttle control. Other options available.