

GRADY-WHITE BOATS

P.O. Box 1527, Greenville, NC 27835-1527
Greenville Blvd. NE, Greenville, NC 27834
919/752-2111 FAX: 919/752-4217

WELCOME ABOARD!

Congratulations! Welcome to the Grady-White "family" of proud and friendly boat owners.

The Grady-White you have purchased is the strongest, safest, and highest quality boat you can buy. It was built by dedicated craftsmen in the most modern boat-building facility in the United States. All of us at Grady-White Boats wish you many happy, carefree hours of boating in your Grady-White.

Your Grady-White boat meets or exceeds every safety standard of the U. S. Coast Guard and the National Marine Manufacturers Association's (NMMA) Certification Program. Your Grady-White's safety and seaworthiness, however, depends on your operation, maintenance and care of your boat. That's why we have put a great deal of time and thought into this owner's manual. It includes the precautions, facts and tips that will help make your boating safe and enjoyable. Please study this manual thoroughly!

My thanks to you for choosing Grady-White. All of us here at the factory are dedicated toward earning your confidence in Grady-White Boats. Happy boating and welcome aboard.

Sincerely yours,

GRADY-WHITE BOATS, INC.



Kris Sheppard
President

TABLE OF CONTENTS

WELCOME ABOARD
SPECIFICATION SHEET

BOATING SAFETY

REQUIRED SAFETY EQUIPMENT.....	PAGE 7
ADDITIONAL RECOMMENDED EQUIPMENT.....	PAGE 8
DISCHARGE REGULATIONS.....	PAGE 8
BOATING SAFETY TIPS.....	PAGE 9
CERTIFICATION.....	PAGE 11

GAUGES AND SWITCHES

MERCURY AND OMC PRE-RIG GAUGES.....	PAGE 12
YAMAHA PRE-RIG GAUGES.....	PAGE 13
SWITCH PANEL.....	PAGE 15
AC/DC PANEL.....	PAGE 17
OTHER SWITCHES.....	PAGE 19

STEERING

HYDRAULIC STEERING.....	PAGE 20
TILT STEERING.....	PAGE 20

BOAT OPERATION

FUELING.....	PAGE 21
FUEL SYSTEM MAINTENANCE.....	PAGE 22
TRAILERING.....	PAGE 23
LAUNCHING.....	PAGE 24
PRE-START CHECKLIST.....	PAGE 24
STARTING.....	PAGE 24
TOWING OR BEING TOWED.....	PAGE 25
GROUNDING.....	PAGE 25
RECOVERY.....	PAGE 25
ANCHORING.....	PAGE 26
WINDLASS.....	PAGE 26
DOCKING/UNDOCKING.....	PAGE 27
THROTTLE/SHIFT CONTROL.....	PAGE 28

PERFORMANCE

TRIM.....	PAGE 29
TRIM TABS.....	PAGE 30
TRIM TAB PUMP LOCATION.....	PAGE 31
PROPELLER.....	PAGE 32
LOAD DISTRIBUTION.....	PAGE 32

MAINTENANCE AND SERVICE

FIBERGLASS FINISH.....	PAGE 33
------------------------	---------

GELCOAT.....	PAGE 34
UPHOLSTRY.....	PAGE 34
CANVAS.....	PAGE 35
DURATRIM/POLYETHYLENE/PLEXIGLASS.....	PAGE 35
HARDWARE/HARDTOP.....	PAGE 36
FUEL TANK COMPARTMENT.....	PAGE 36
SCUPPERS.....	PAGE 37
HARDWARE MOUNTING.....	PAGE 37
BATTERY.....	PAGE 37
RIGGING COMPARTMENTS.....	PAGE 38

WINTERIZATION AND STORAGE

PAGE 39

HEAD OPERATING INSTRUCTIONS

MARINE ELECTRIC HEAD.....	PAGE 41
HAND PUMP MARINE HEAD.....	PAGE 41
PORTABLE HEAD WITH IN-LINE MACERATOR.....	PAGE 42
PORTABLE HEAD WITH DECK PUMP-OUT.....	PAGE 43

MISCELLANEOUS

ACCESSORY WIRING COLOR CODE AND FUSE SIZES.....	PAGE 44
TYPICAL OUTBOARD INSTRUMENT AND SWITCH PANEL WIRING.....	PAGE 45
300 ACCESSORY WIRING DIAGRAM.....	PAGE 46
300 DOCKSIDE POWER WIRING DIAGRAM.....	PAGE 47
300 AC/DC PANEL WIRING DIAGRAM.....	PAGE 48
300 BATTERY SELECT WIRING DIAGRAM.....	PAGE 49
300 HARDTOP WIRING DIAGRAM.....	PAGE 50
300 STEREO WIRING DIAGRAM AND DYNAPLATE WIRING DIAGRAM....	PAGE 51
300 AIR CONDITIONING ASSEMBLY.....	PAGE 52
300 AIR CONDITIONING LAYOUT.....	PAGE 53
300 GENERATOR ASSEMBLY.....	PAGE 54
300 GENERATOR WIRING DIAGRAM.....	PAGE 55
300 PRESSURIZED FRESH WATER SYSTEM.....	PAGE 56
272 ACCESSORY WIRING DIAGRAM.....	PAGE 57
272 HARDTOP WIRING DIAGRAM.....	PAGE 58
272 DOCKSIDE POWER WIRING DIAGRAM.....	PAGE 59
272 PRESSURIZED SHOWER/HOT WATER SYSTEM.....	PAGE 60
268 AND 272 AC INLET AND RECEPTACLE WIRING SCHEMATIC.....	PAGE 61
268 AND 272 BATTERY SELECT WIRING DIAGRAM.....	PAGE 62
268 AND 272 AC PANEL WIRING DIAGRAM.....	PAGE 63
268 ACCESSORY WIRING DIAGRAM.....	PAGE 64
268 DOCKSIDE POWER WIRING DIAGRAM.....	PAGE 65
268 HARDTOP WIRING DIAGRAM.....	PAGE 66
268 PRESSURIZED SHOWER/HOT WATER SYSTEM.....	PAGE 67
263 ACCESSORY WIRING DIAGRAM.....	PAGE 68
263 FRESH WATER SYSTEM.....	PAGE 69
263 LIVWELL SYSTEM (OPTION).....	PAGE 70
LIVWELL/WASHDOWN SYSTEM.....	PAGE 71
HULL/LINER/DECK LAYOUT.....	PAGE 72
COMMONLY USED NAUTICAL TERMS.....	PAGE 73
INDEX	
WARRANTY	

BOATING SAFETY

REQUIRED SAFETY EQUIPMENT

The U.S. Coast Guard requires that every boat has specific equipment on board. There are also local agencies which require additional equipment, so find out if your local regulations require more equipment than the list of Coast Guard requirements below.

As your Grady-White is between 26 and 40 feet, it is classified as a Class 2 boat and requires the following safety equipment:

FIRE EXTINGUISHER

All Class two boats must be equipped with (2) fire extinguishers that are approved for marine use. They should be classified to extinguish Type B (gasoline, oil or grease) fires. Your fire extinguishers should be easily accessible, and each passenger should be aware of its location.

PERSONAL FLOTATION

Each passenger must have a U.S. Coast Guard approved personal flotation device. They should be stored where they can be reached easily and quickly. These flotation devices must be in good condition and the appropriate size for the intended wearer. Small children and non-swimmers should have these flotation devices at all times. Each Class 2 boat is also required to carry an approved Type 4 throwable flotation device, such as a ring buoy or boat cushion.

HORN

All Class 2 boats are required to carry a hand, lung, or power-operated horn that is audible for at least one mile.

VISUAL DISTRESS SIGNALS

Coast Guard-approved visual distress signals are now required when operating in U. S. waters and on the high seas. Some examples of visual distress signals include: flares, orange smoke, orange flag (day use only), and electric distress light (night use only).

REGISTRATION NUMBERS

Federal and state laws require that a power boat be registered in the state where it is principally used. Both registration numbers and validation stickers must be displayed according to the regulations, and the registration certificate must be carried on board. The boat's serial number, required on the registration form, is found on the upper right hand corner of the transom.

LIGHTING

All Grady-White boats are equipped with navigational lights that meet the latest requirements for inland and international waters. If there is any doubt, or if requirements change, consult your dealer.

For more information on Coast Guard required safety equipment refer to the U.S. Coast Guard publication CG-290.

ADDITIONAL RECOMMENDED EQUIPMENT

In addition to the required safety equipment, we also recommend the following:

VHF Radio	Mooring lines (2)
Anchor with chain and line	Tow line
Sea anchor	Drinking water and food
Spotlight or flashlight	First aid kit
Navigational charts of the area	Compass
Spare propeller and hardware	Boat hook

Tool kit including: adjustable wrench, slip-joint pliers, spark plug wrench and spark plugs, screwdrivers (slotted & Phillips), box end wrench set, hammer, roll of flexible wire, electrical tape, knife, spare fuses, and hydraulic fluid.

DISCHARGE REGULATIONS

The U.S. Coast Guard requires that any vessel that is 26 feet or more in length display one or more placards in prominent locations, so that they can be read by the crew and passengers. The placard must include the following information:

1. The discharge of plastic or garbage mixed with plastic into any waters is prohibited.
2. The discharge of all garbage is prohibited in the navigable waters of the United States and in all other waters within three nautical miles of the nearest land.
3. The discharge of dunnage, lining, or packing materials that float is prohibited within 25 nautical miles of the nearest land.
4. Other unground garbage may be discharged beyond 12 nautical miles from the nearest land.

5. Other garbage ground to less than one inch may be discharged beyond three nautical miles of the nearest land.
6. A person who violates the above requirements is liable for a civil penalty of up to \$25,000, a fine of up to \$50,000, and imprisonment for up to five years for each violation.
7. Regional, state, and local restrictions on garbage discharge may also apply.

Each placard must be at least nine inches wide and four inches high, made of a durable material, and printed with letters that are at least 1/8 of an inch in height.

BOATING SAFETY TIPS

The following tips will add to your boating safety and pleasure:

1. Fill out a float plan and leave it with a responsible person. This is valuable information needed in case of a mishap and you do not return on time. It is your responsibility to let this person know you have returned.
2. Watch the weather. If you are caught in a storm, reduce speed, head into the wind/waves, and keep all gear and passengers close to the center line of the boat for stability. Head for the nearest shelter.
3. Instruct at least one passenger on the fundamentals of operating your boat in case of an emergency.
4. Report any boating accident to the local authorities, whether or not you are involved.

IN CASE OF AN ACCIDENT



Federal regulations require boat operators, that are involved in an accident, to submit a written report within 48 hours, if a person disappears, dies within 24 hours, or requires medical attention. If property damage exceeds \$500, the report must be submitted within 10 days. In the event of death or disappearance, notification is required immediately. These reports can be submitted to the State Boating Law Administrator. Forms can be obtained through USCG, harbor patrol offices, sheriff and police stations.

5. Raise and lower your arms repeatedly if you are having trouble. Other signals include waving a shirt tied to a pole, repeatedly sounding your horn, flying your boat's ensign upside down, and lighting flares.

6. Keep your boat speed under control. Respect for other boaters and those on shore is common courtesy. In addition, the operator is responsible for any injury or damage caused by the boat's wake. Your wake could swamp or damage a smaller craft and endanger its passengers. Stay alert to areas having signs posted "No Wake Zones".
7. Turn off engines before swimmers enter or exit the boat. A shift lever in neutral could become engaged accidentally, seriously injuring swimmers.
8. Consult with people familiar with the boating area when venturing into unknown waters. Obtain a chart for new areas whenever possible.
9. Recommend boat shoes or tennis shoes to your passengers rather than street shoes or bare feet.
10. Use only United States Coast Guard approved parts or parts that are certified for marine use.

FOR INFORMATION ON FREE BOATING COURSES IN YOUR AREA CALL THE
BOATING EDUCATION HOTLINE 1-800-336-BOAT (2628).

IMPORTANT!!




The fumes from the engine(s) contain carbon monoxide, which may be a health hazard and can be fatal if breathed over a prolonged period of time. Carbon monoxide is a gas formed by the combination of one molecule of carbon and one molecule of oxygen. Chemists refer to it as CO, its chemical formula, "C" for carbon and "O" for oxygen. CO is a colorless, odorless, and tasteless gas. Its weight is about the same as air, so it cannot be expected to rise or fall like some other gases, but will distribute itself throughout space.

Carbon monoxide can accumulate in cabins and under canvas. If your boat is equipped with canvas that encloses the aft cockpit and the propulsion equipment, do not operate the boat with this canvas closed.

The boat operator should be aware that CO is emitted from any boat's exhaust. The operation, mooring, and anchoring in an area containing other boats may be in an atmosphere containing CO that is not of the operator's making. An operator, likewise, needs to be aware of the effect of his actions on other boats. Of prime concern is the operation of an auxiliary generator with boats moored along side each other. Be aware of the effect your exhaust may have on other vessels, and be aware that the operation of other vessel's equipment may affect the carbon monoxide concentration on your vessel.

CERTIFICATION

At the helm station, you will find a NMMA Yacht Certification tag. This tag means your yacht complies with Coast Guard safety standards. (NOTE: Any boat with an overall length of 26 feet or greater is defined as a "yacht" by NMMA.)

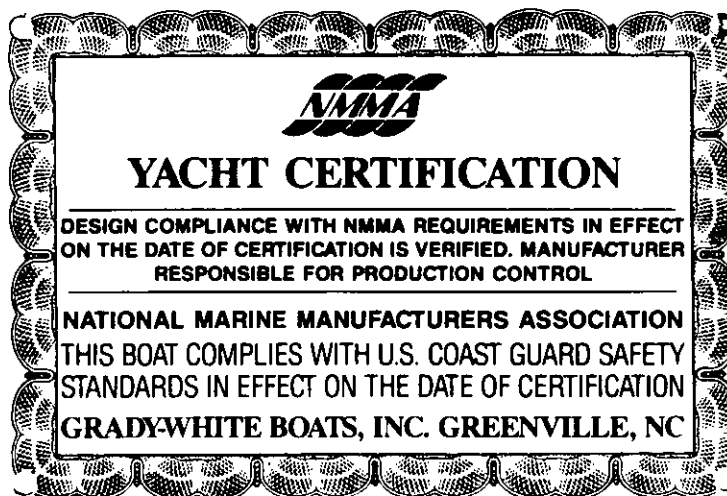

This label means that your Grady-White is certified by the (NMMA) National Marine Manufacturers Association. With this tag, you are assured that your fuel system, electrical system, lighting, ventilation, and steering, are not only in compliance with the U.S. Coast Guard regulations, but also meet the more stringent standards of the NMMA. The NMMA is a national trade organization serving all elements of the recreational boating industry, including manufacturers of boating equipment. With this tag, you can have confidence in the quality of your boat.


BASIC FLOATATION

**THIS BOAT HAS "BASIC FLOTATION" AS
DEFINED BY ABYC STANDARD H-8.**

This label means that Grady-White has designed and built your boat to the ABYC basic flotation standard H-8. Basic flotation is defined as having enough foam, in the boat, to create buoyancy and prevent sinking under swamped conditions.

GAUGES AND SWITCHES

MERCURY AND OMC PRE-RIG GAUGES

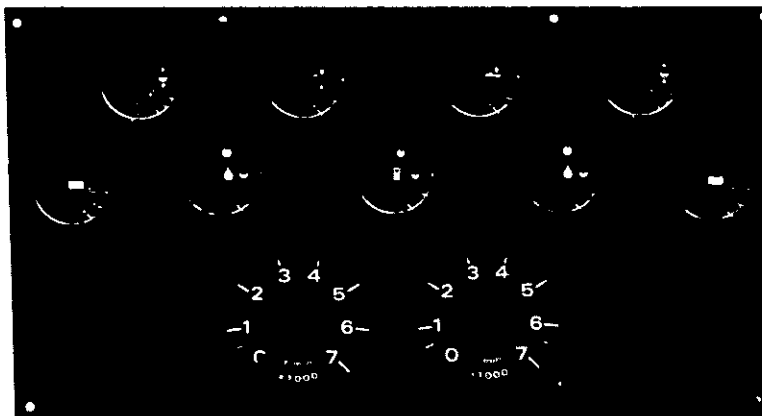

FUEL GAUGE

The fuel gauge indicates the fuel level. When reading this gauge, remember two things: (1) the accuracy of your gauge varies with the attitude of your boat in the water (trim or list), and (2) the fuel pickup tube inside the gas tank is not capable of withdrawing all of the fuel from the tank. For these reasons, never operate your boat at extremely low fuel levels.

OIL QUANTITY GAUGE

OMC pre-rigs are equipped with an oil quantity gauge that indicates the oil level in the tank.

TACHOMETER GAUGE

The tachometer indicates engine revolutions per minute (RPM's). Consult your engine owner's manual for recommended operating RPM's.

TRIM GAUGE

The trim gauge indicates the angle of thrust of the lower unit of the engines. See the PERFORMANCE section of this manual (page 29) for trim adjustment recommendations.

VOLTMETER

The voltmeter indicates the battery charge. A reading of 12 or 13 volts is normal, indicating a fully-charged battery. Readings below 11 indicate a weak battery, which may not start the engine(s). A reading of 13 to 15 volts when the engine is running is normal. Readings over 15 volts may indicate regulator problems. Low or fluctuating readings may indicate loose connections, loose belts, or trouble in the regulator and alternator circuit. A voltage drop soon after the engine is shut down indicates a bad battery or a heavy load on the electrical system.

WATER PRESSURE GAUGE (OMC PRE-RIG ONLY)


The water pressure gauge indicates the water pressure in the engine cooling system. Readings help determine if water pressure is too low for adequate cooling.

WATER TEMPERATURE GAUGE (MERCURY PRE-RIG ONLY)

The water temperature gauge indicates the temperature of the cooling water circulating through your engine. When the temperature exceeds the recommended operating range for your engine, immediately shut off your engine to prevent damage. Overheating is often caused by obstruction of your engine's water intake on the lower unit. Check the water intake first if you experience trouble.

WATER TEMPERATURE, OIL LEVEL, AND FUEL SYSTEM WARNING BUZZER

Your Grady-White has a factory installed warning buzzer, located under the dash, for water temperature and oil level. In addition, OMC pre-rigs utilize a fuel system warning buzzer.

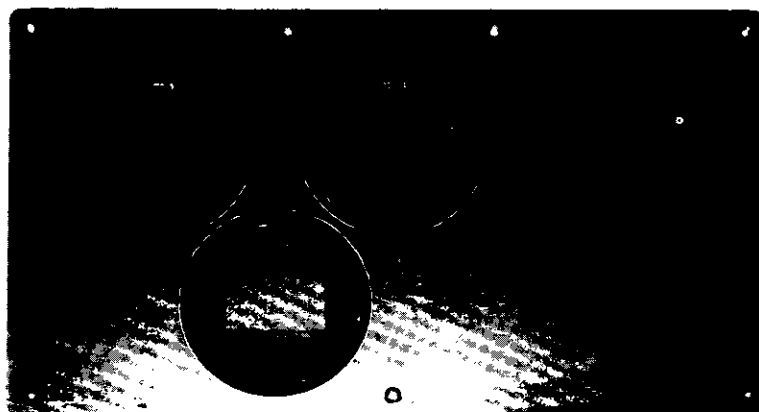YAMAHA PRE-RIG GAUGES**DIGITAL SPEEDOMETER****BATTERY VOLTAGE INDICATOR**

This feature indicates the battery charge when the engine is off, and indicates the alternator output when the engine is running. A reading of 12 or 13 volts is normal, indicating a fully-charged battery. Readings below 11 indicate a weak battery, which may not start the engines. A reading of 13 to 15 volts when the engine is running is normal. Readings over 15 volts may indicate regulator problems. Low or fluctuating readings may indicate loose connections, loose belts, or trouble in the regulator and alternator circuit. A voltage drop soon after the engine is shut down indicates a bad battery or a heavy load on the electrical system.

CLOCK

This feature is battery powered and will need to be reset each time the battery select switch is turned to the "off" position.

FUEL METER

This feature indicates the gas tank fuel level. When reading this gauge, remember two things: (1) the accuracy of your gauge varies with the attitude of your boat in the water (trim or list), and (2) the fuel pickup tube inside the gas tank is not capable of withdrawing all of the fuel from the tank. For these reasons, never operate your boat at extremely low fuel levels.

LOW FUEL WARNING INDICATOR

This feature indicates when the fuel level in the main fuel tank is becoming low.

OVERHEAT WARNING INDICATOR

This feature indicates when the temperature of the cooling water circulating through the engine is too high. When the temperature exceeds the recommended operating range indicated by your engine owner's manual, immediately shut off your engine to prevent damage. Overheating is often caused by obstruction of your engine's intake on the lower unit. Check the water intake first if you experience trouble.

SPEEDOMETER

This feature indicates boat speed in miles per hour, knots per hour, or nautical miles per hour.

TRIP METER

This feature indicates the distance traveled since the meter was last set.

DIGITAL TACHOMETER**OIL LEVEL WARNING LIGHT**

Refer to your engine owner's manual for information regarding oil level and warning light.

REVOLUTIONS PER MINUTE (RPM's)

Consult your engine owner's manual for recommended operating RPM range.

TRIM

This feature indicates the angle of thrust of the lower unit of the engine. See the PERFORMANCE section of this manual (page 29) for trim angle recommendations.

~~519-721-8888~~

**DIGITAL FUEL METER
ECONOMIZER**

The economizer feature, on the fuel management gauge, gives readings in gallons per hour and miles per gallon.

SYNCHRONIZER


The synchronizer tells the operator when the engines are running at the same RPM's.

TOTALIZER

The totalizer feature displays the amount of fuel consumed since it was last set. To reset the totalizer, press the SET and MODE buttons together.

The fuel meter can display information for port side only, starboard side only, and then a total consumption. For more detailed information refer to engine owner's manual.

SWITCH PANEL

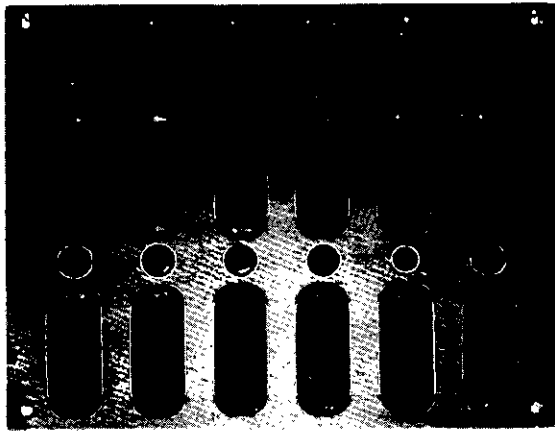

At the helm station you will find an accessory switch panel. Accessory switches are noted on next page.

BILGE PUMP

This two-way switch serves as an overriding manual switch in the event of failure of the automatic switch in the bilge.

COCKPIT LIGHTS

The cockpit lights provide illumination for the cockpit area.

FUEL

The three-position switch (MAIN-OFF-AUX) gives you separate quantity readings for each tank.

HORN

The horn meets the requirements of the United States Coast Guard's emergency sound signaling device.

LIVWELL

This switch activates the livewell. Refer to the drawing of the livewell system on page 71 of this manual.

WASHDOWN

This switch activates the washdown system.

NAVIGATIONAL/ANCHOR LIGHTS

Your yacht is equipped with lights that meet international lighting regulations. The three position switch (NAV-OFF-ANCHOR) changes the lighting configuration to running or anchor lights. Note that this switch operates the gauge lights.

PRIMER PUMP SWITCH

The primer pumps should be activated at the initial "start-up" time. The "up" position is for the starboard engine and the "down" position is for the port engine.

WIPERS

This switch activates the windshield wipers.


ACCESSORY

Switches labeled "Accessory" are blank switches, and fuses labeled "Accessory" are blank fuses. Both are used for non-factory installed accessories.

NOTE: Most accessory switch panels have indicator lights and fuse holders for each switch. (See page 44, for recommended fuse amperages). Switch identification labels are available from your dealer for non-factory installed options.

AC/DC PANEL

The 300 Marlin AC/DC panel is located in the aft part of the cabin on the starboard side. If your 272 Sailfish or 268 Islander is equipped with dockside power, you will have an AC panel. The panel wiring diagrams are found on page 48, for the 300, and the 268 and 272 on page 61. AC and DC powered switches are noted below. Some of these switches are included with optional equipment only on the 268 and 272 and may not be found on your boat.

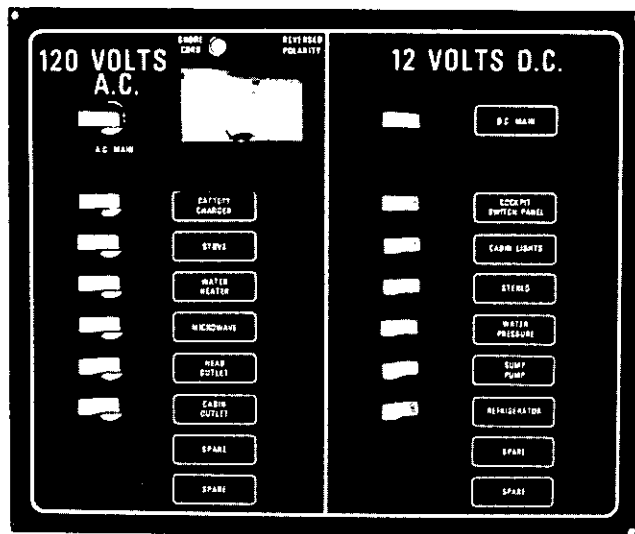

AC POWERED AUXILIARY SWITCHES

Dockside power must be hooked to shore and the circuit breaker (located under the starboard gunwale just forward of the hookup) must be on for these switches to operate.

MAIN POWER SWITCH

The main power switch must be in the "on" position in order to operate the auxiliary switches.

BATTERY CHARGER SWITCH

An amber light will shine when the battery charger is operating.

STOVE

Refer to the manufacturer's operator's manual for safety instructions. CAREFULLY READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE OPERATING YOUR STOVE.

WATER HEATER SWITCH

This switch activates your six-gallon water heater. TO AVOID HEATING ELEMENT FAILURE, DO NOT TURN ON THE HOT WATER HEATER UNLESS IT IS FILLED WITH WATER.

MICROWAVE

An outlet has been designated for microwave use only. Read all instructions in the manufacturer's operating manual before operating your microwave.

HEAD OUTLET SWITCH

The ground fault head outlet is a duplex receptacle and is equipped with a cover plate. See the diagrams on page 47, 59, or 65 for outlet locations and wiring specifications for your boat model.

CABIN OUTLETS SWITCH

There are two cabin outlets. One is designated for the microwave (optional on the 272 Sailfish), and the other is a ground fault receptacle and is located under the steps in the cabin on the 300 Marlin and on the forward wall of the galley on the 268 Islander or 272 Sailfish. See the AC wiring diagram section for locations and wiring specifications.

AIR CONDITIONER

This switch operates the optional air conditioner. This system must be winterized if below freezing temperatures are possible. Refer to the manufacturer's operating manual for instructions.

DC POWERED AUXILIARY SWITCHES**MAIN POWER SWITCH**

The main power switch must be in the "on" position in order to operate the DC auxiliary switches.

COCKPIT SWITCH PANEL

This switch activates the auxiliary switches at the helm accessory panel.

CABIN LIGHTS

This switch provides power for the two dome lights and the four reading lights located in the cabin.

STEREO

This switch activates the stereo.

WATER PRESSURE SWITCH

This switch activates the pressurized fresh water system for the galley faucet, head faucet, cockpit rigging station, and cockpit shower.

SHOWER SUMP PUMP

The shower sump pump removes water from the shower floor. This unit is located under the cabin sole hatch.

REFRIGERATOR

Refer to the manufacturer's operating manual for operation and safety instructions.

OTHER SWITCHES

AC TRANSFER SWITCH (300 MARLIN)

The transfer switch is located in the cabin on the wire cover box. This switch permits you to operate your AC accessories by shore power or by generator, and prohibits the operation of shore power and generator simultaneously.

GENERATOR START/STOP SWITCH (300 MARLIN)

The start/stop switch is located in the cabin on the wire cover box. This switch permits you to start and stop your optional generator from the cabin. Note that there is another start/stop switch on the generator itself.

BATTERY SELECT SWITCH


The 300 Marlin is equipped with three battery select switches and four batteries. Two battery select switches and two batteries are designated for the engines. The remaining select switch and batteries are used for accessories. See the battery select switch wiring diagram on page 49. The 300 Marlin accessory battery select switch is connected to two batteries. Accessories are powered by the battery that is chosen on the select switch.

The 272 Sailfish and a twin 268 Islander is equipped with three batteries, two select switches, and one ON/OFF switch. The battery select switches and two batteries are designated for the engines. The remaining battery and ON/OFF switch is used for accessories. See the battery select switch diagram on page 62. A single engine 268 has three batteries, one select switch, and one ON/OFF switch. Two batteries and the select switch are designated for the engine. The remaining battery and ON/OFF switch are used for the accessories.

A twin engine 263 Chase has two batteries and two select switches. One select switch is designated for each engine and the accessories operate from the same switch as the starboard engine. A single engine 263 Chase has two batteries and one select switch. The single switch is used for both the engine and accessories.

If your boat is equipped with twin engines, a battery select switch should be connected to each engine. Either engine may be started by either battery by selecting battery #1 or battery #2 on the switches. In normal use, select battery #1 on one switch and battery #2 on the other so that both batteries will be charged simultaneously.

WARNING: Never turn the battery select switch to the "OFF" position with the engine running as this could damage the charging system.



STEERING

HYDRAULIC STEERING

Hydraulic steering systems (not to be confused with power steering) require regular preventative maintenance for continued safe and reliable operation. The oil level in the helm pump must be maintained within acceptable operating levels. A low oil level will cause air to be introduced into the steering system and result in unresponsive steering. The oil level should always be within 1/2 inch from the base of the fill hole, located on the front top portion of the helm pump. Check the steering system for oil leaks. An unchecked leak, in time, will result in unresponsive steering and/or possible loss of steering.

All moving mechanical linkages, sliders, etc. must be greased as needed with a high quality marine grease.

Refer to steering manufacturer's owner's manual for specification recommendations and additional maintenance requirements.

Any slow or sudden change in the "feel" of your steering system indicates an immediate need for a thorough inspection. All repairs and replacements to steering systems should be made only by an authorized dealer.

TILT STEERING

Tilt steering is available as an option in conjunction with hydraulic steering. This feature enables the operator to tilt the wheel up or down. Refer to steering system's owner's manual for information on oil levels with tilt steering.

BOAT OPERATION



FUELING

Safety during fueling requires common sense and caution. Please study the following procedure carefully, and ask your dealer if you have any questions.

1. Check your engine owner's manual to make sure that you only use on the type of fuel specified by the manufacturer. Do not use gasoline containing alcohol. Alcohol in fuel will deteriorate the rubber material used to make up your fueling system. If you operate an outboard with an oil injection system, check the engine manual for the recommended type of oil and fill the oil tank completely.
2. Extinguish all cigarettes and other lighted material.
3. Before fueling close all ports, hatches, windows, and engine compartments, in order to prevent gasoline fumes from accumulating in these closed areas.
4. Turn battery select switch(es) to "off" position to stop all engines, motors, fans, and lights etc. before fueling.
5. Keep the fuel supply nozzle in contact with the fuel tank opening in order to prevent a static spark.
6. Observe fuel flow at all times to prevent overflow or spillage.
7. Secure the fuel cap, check fuel lines and connections for leakage. Wash down and clean off any spilled fuel. Dispose of any rags, sponges, etc. used for clean-up. Do not store these items on board.
8. Ventilate all ports, windows, hatches, engine compartment, and closed areas. Be sure there are no fumes left in these areas before turning on battery select switch(es).
9. Select your first tank carefully, taking into consideration the distribution of your load as fuel is consumed. Performance will be affected by the weight distribution in your boat.
10. Keep the fuel tank as full as possible, especially during storage, as condensation can develop and result in water in your fuel system.


FUEL SYSTEM MAINTENANCE

If you are experiencing fuel flow problems, an easy method of determining if the problem is in your fuel system is to connect a six gallon portable tank to your engine. Also, inspect the anti-siphon valve (picture on next page) to make sure fuel is flowing properly. The manual shut off valve should be closed when servicing the fuel system to avoid spilling fuel into the bilge.

Do not use fuels containing alcohol. Alcohol, particularly methanol, will absorb water, which makes fuel more corrosive to metals in tanks and carburetors, and shortens the life of elastomers, such as hoses and gaskets.

After fueling, inspect the fuel lines, connections, and fuel tanks for tightness, signs of leaks, and deterioration. At least annually, conduct a more thorough inspection of fuel system components, especially those hidden from routine inspection. Replace any fittings, deteriorated hoses, or clamps also, fix any bad connections that may cause a problem.

Reference the Fuel Tank Compartment section, on page 36, for more information on cleaning the fuel storage area.

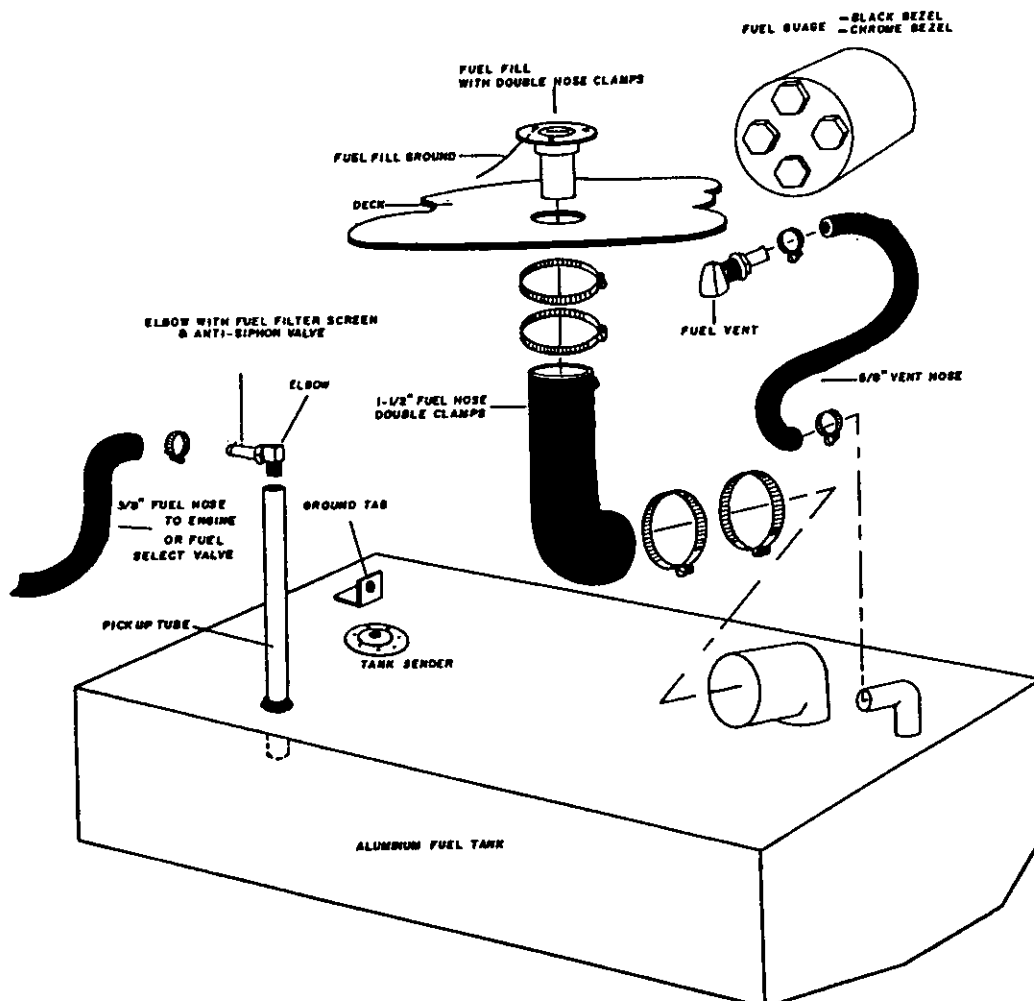


TRAILERING


The adjustment and balance of your boat on your trailer determines how easily your boat may be transported. Swaying while trailering is usually caused by a tail-heavy load. The tongue weight on the hitch ball should be 5-10% of the total weight of your boat, motor, and trailer. The rollers and/or bunkers of your trailer should be adjusted so that the weight is distributed evenly across the stern and forward throughout the keel section. Your dealer should be responsible for adjusting your trailer properly.

Check the following prior to trailering your boat:

1. Hitch is tight and secure.
2. All nuts and bolts are securely tightened and the safety chain properly secured.
3. Winchlocks and tilt mechanism in correct positions.
4. Tires (including spare) are properly inflated and in good condition.
5. Signal, stop, and other lights operating properly.
6. Gear and lines on boat are properly secured for travel.
7. Tie down straps are secure.
8. Wheel bearings properly greased (each year).
9. All cabin windows and doors secured.
10. All canvas tops and side curtains are taken down and secured to prevent wind damage/loss in transit.
11. Motor is in recommended travel position.
12. Mooring cover removed. (Damage to canvas during transit is not covered in warranty).

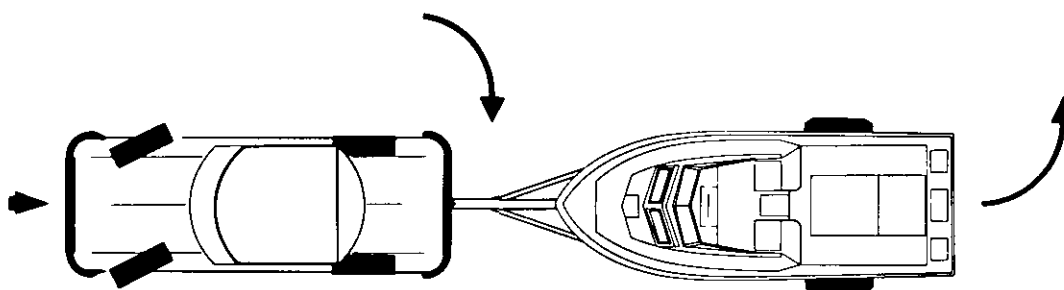

BACKING TO RIGHT

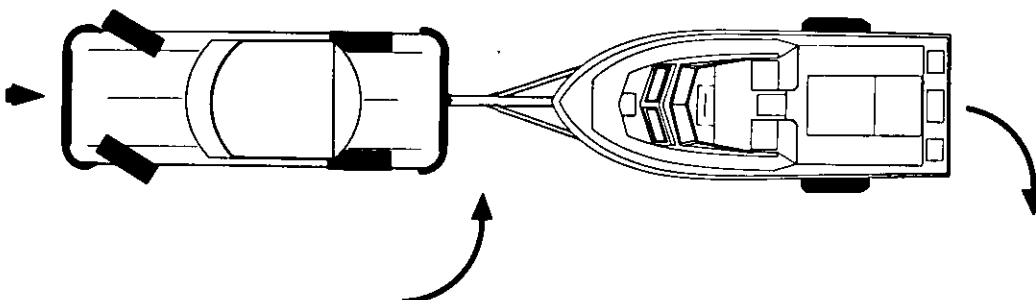

BACKING TO LEFT

LAUNCH AND RECOVERY

LAUNCHING

Prior to initial launch, familiarize yourself with this manual and all aspects of your boat. At the launch site, go through a pre-launch check list. The check list should be suited to your particular needs, but the following items should be included:

1. Make sure the drain plug is in place.
2. Attach a launch rope.
3. Make sure the proper safety equipment is on board.
4. Tilt engine or drive unit to the "up" position.
5. Remove the tie down strap.
6. Close the engine drain and freeze plugs.

After the pre-launch check, back your trailer slowly into the water, preferably keeping the axle hubs above water (unless your trailer is a submersible model). Set the hand brake of your car and place chocks under the rear wheels. Attach a bow line to the boat, release the winch cable, and give the boat a firm push. When the boat is clear of the trailer and secured to the dock, move the trailer to the parking area.

PRE-START CHECKLIST

1. Check the bilge for excess water and leaks.
2. Turn on the bilge pump to remove any excess water, and leave the pump on stand-by.
3. Check engine oil level, battery cable connections, electrolyte level, and all drive belts for wear and proper tension.
4. Check steering for freedom of movement.
5. Make sure navigation lights are in working order.

STARTING

1. Lower the drive unit to the "down" position. Be sure the propeller is free of any obstruction.
2. Set the control lever in the neutral position. Engage the neutral lock out button in the control handle and pump the control throttle forward 2 or 3 times.
3. Set control throttle slightly forward of straight up and turn the ignition key to start.
4. Check all instruments. If the oil pressure gauge does not respond immediately, shut off the engine.
5. Test steering and throttle response at the dock.

TOWING OR BEING TOWED

In the event of a mishap or power loss, you may need to tow a boat or have yours towed. Remember you should not tow a boat larger than your own. A bridle should be tied securely to the pad eyes on the transom with enough slack to clear the engine and stern drive. Then a tow line should be attached to the bridle so that it can slide from side to side to prevent too much pressure on a single pad eye. The tow line should then be attached to the bow eye of the towed boat. The tow line should be a minimum of twice the length of the towing boat, the longer the better. Nylon ropes are recommended due to the strength and elasticity they provide to absorb the shock of towing and sudden jerks that may occur. It is important to keep the slack out of the propeller area. The towed boat should always have someone at the wheel, since the boat may swing off course. Watch the action of the towing boat, if she slows down try to turn astern to avoid hitting her stern. As a precaution, everyone on both boats, should stay clear of the towline, it could break and fly in either direction and cause injury.

GROUNDING

If your boat becomes grounded, and your propeller is in mud or sand, that you do not try to power off due to the damage the sand or mud could cause to your engine's cooling system. Your boat draws 15-20 inches of water. When grounded, try to float your boat off by tilting the motor back and rocking the boat from side to side to break the suction of mud from the keel. When boating in salt water keep in mind the changing of the tide.

Many inland areas have rocks and stumps which could crack or puncture a fiberglass hull. Be sure you know the area your boating in, remember care should be taken in shallow water.


RECOVERY

1. Secure the boat to the dock or boarding platform.
2. Make sure all equipment has been unloaded and all people are off of the boat.
3. Back trailer into position in the same manner as launching.
4. Use the bow line to maneuver the boat into position for loading.
5. Load and secure the boat onto the trailer.
6. Move the trailer and boat away from the ramp and remove the drain plug to allow water to drain from the boat.
7. Complete cleanup and other precautionary measures before towing.

ANCHORING

The size of your boat and the type of lake, sea, or river bottom in your boating area should determine the size and type of anchor. The anchor rode length should be 4 to 7 times the depth of the water. Increase this length in strong winds and currents.

A 3 to 4 foot length of chain between the anchor and the anchor rode will help prevent the line from chaffing on rough obstacles, and will also help hold anchor flukes down for more secure anchoring.

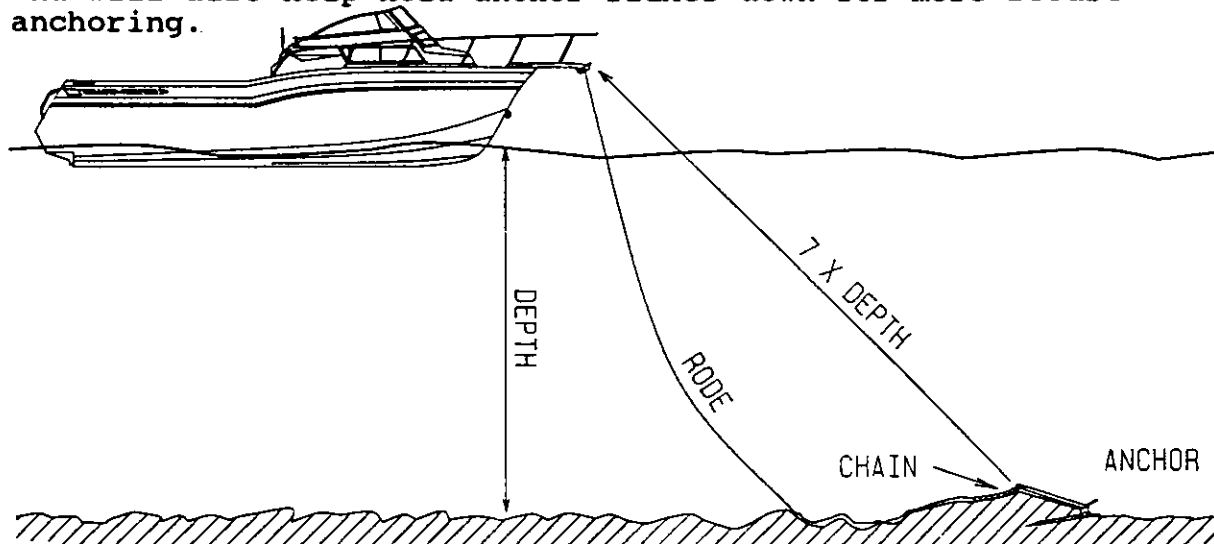

To anchor, head the boat into the wind or current to stop the forward motion. Make sure your anchor line is secured to a cleat and runs under the bow rail. Lower the anchor into the water until it reaches the bottom. Feed out the anchor line slowly as the wind or current forces the boat backward. Reverse engine if necessary. Before stopping engines, to make sure anchor is set or dragging take a gradual strain off the rode then pull firmly. Even while anchored, your boat will swing with the wind, so do not anchor close to other boats or objects. In addition, remember that it is illegal to tie your boat to navigational aids, such as buoys and markers.

To retrieve the anchor, slowly drive the boat to the point directly above the anchor and pull upward on the anchor line until anchor is retrieved. If the anchor is difficult to breakout tie off the anchor line while directly over the anchor and slowly motor forward to break the anchor out.



WARNING: Never anchor off the stern of the boat, especially in strong winds or currents. The weight of the stern and flat surface to the seas can easily cause water to enter over the transom, and swamp the boat.

WINDLASS

Anchoring can be less labor intensive if your boat has a windlass accessory. If your boat is equipped with a windlass, reference your windlass owner's manual for operating procedures.

DOCKING/UNDOCKING

Unlike an automobile, the stern of your boat reacts first when turning. A turn to the right will swing the stern to the left and vice-versa. Remember that turning your boat away from an object, such as a dock will tend to swing the stern toward that object.

Before bringing your boat to the dock, consider the wind and how it may be used to your advantage. The boat is more maneuverable against the wind than with the wind. Approach the dock at a 30 to 45 degree angle at a slow speed. Before the bow reaches the dock, shift the engine to neutral, turn the steering wheel toward the dock, and shift the engine into reverse. The boat will slow and the stern will swing toward the dock.


When pulling away from the dock, push the stern clear of the dock to make sure you have enough room to maneuver. You can then get underway without bumping the stern against the dock.

Slowing and stopping your boat requires some practice. The length of time required to come to a complete stop will vary with wind and current. Judging the distance and momentum of the water is a skill that improves greatly with practice.


THROTTLE/SHIFT CONTROL

The throttle/shift control, located at the helm station, controls the flow of fuel to the engine and acts as a gear shift lever to control the forward and aft thrust of the propeller. The vertical position of the throttle control is normally the neutral position. Move the control forward to engage the shifting mechanism, which creates a forward thrust of the propeller. Increase the forward movement to increase the fuel flow to the engine and increase the forward thrust.

Move the control lever aft of the neutral position to reverse the shift mechanism and create a reverse thrust of the propeller. Increase the aft movement to increase the reverse thrust. Remember that propellers are designed for maximum forward thrust, so reverse thrust will not be as efficient.

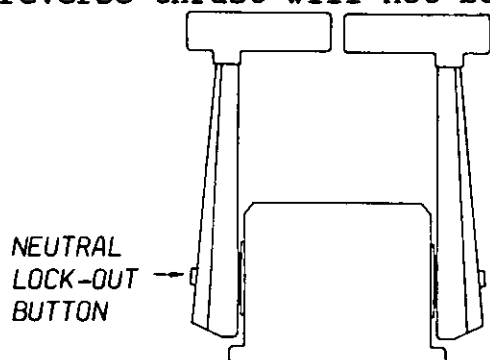


FOR MERCURY AND
YAMAHA ENGINES

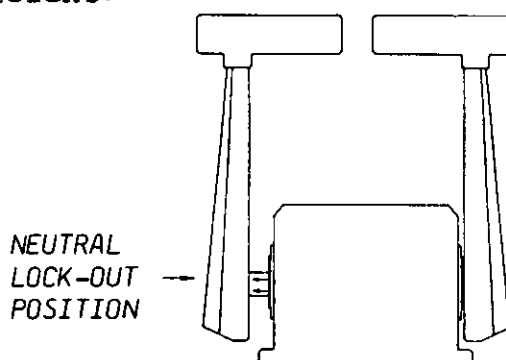

FOR OMC ENGINES

All controls have a safety mechanism that does not allow the engine to start when the control is in gear. To increase the flow of fuel to the engine while remaining in the neutral position, you may use the neutral lock out button in the control handle. Also, as the boat is moving forward, you may reverse the shift mechanism to provide a "braking action" which will slow the boat.



CAUTION: THIS BRAKING ACTION CAUSES A FOLLOWING WAKE WHICH MAY RISE ABOVE THE TRANSOM AND FLOOD THE BOAT IF THE BOAT IS MOVING AT TOO GREAT A SPEED. ALLOW ENGINE RPM' TO DECREASE BEFORE SHIFTING INTO REVERSE.

The control head at the helm should be cleaned and kept free of corrosion. Periodically check the mounting for loose screws. Also check the cable conduit for cracks, abrasions, kinked or bent cable. See your dealer to replace damaged cable.

The cable ends and cable fittings should be checked periodically for corrosion, loose brackets and loose, worn, or damaged fittings. Replace worn or damaged parts. Cable ends, fittings, and the control mechanism may be sprayed with a moisture displacing lubricant. If your control has "quick disconnect" fittings, inspect the springs for corrosion. Should your throttle or shift cables need replacing, the data sheet at the front of this manual will indicate the lengths required.

PERFORMANCE

Maximum performance is only obtained when your hull bottom is clean. Detailed recommendations for hull cleaning are included in the MAINTENANCE section (page 33).


Assuming your boat is equipped with the correct engine, the engine is properly tuned, and the drive system is in good condition, poor boat performance is usually traced to improper trim settings, the wrong propeller, or improper load distribution.

TRIM

Your outboard is equipped with power tilt and trim mechanisms. The purpose of the tilt is to raise the engine for launching, loading, or trailering your boat.

Trim refers both to the weight distributions inside the boat and to the angle of thrust of the drive unit. The angle of thrust of the drive unit either forces the bow up or down. A drive unit tilted too far in (forward) will cause the bow to nose downward or "plow". A drive unit tilted too far out (aft) will cause the bow to ride too high. Adjust the trim so that the angle of thrust is parallel to the water at full throttle at a normal running attitude.

(Example of trimmed boats)

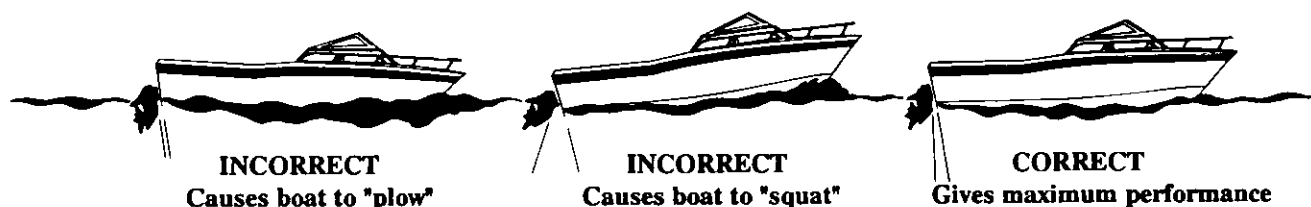


When the angle of thrust is too far out (aft), the engine noise may rise indicating that the propeller is cavitating. Adjust the engine trim in (forward) to correct the problem. The boat may also tend to "porpoise" in maximum bow up position as well. This can be corrected by adjusting the engine trim in and trimming the bow down.


For a smoother ride when running into heavy seas, the bow should be adjusted so that the entry point into the water is slightly forward of the helm location. When running in a following sea, the bow should be trimmed higher to prevent the boat from plowing into the seas. As sea conditions change, experiment with the trim to find the best performance for your boat and load.

TRIM TABS

Trim tabs are electrically-hydraulically operated and are used to regulate the attitude of the boat while moving. They may also be used to adjust the boat's running angle in adverse seas or to compensate for unusual load conditions.

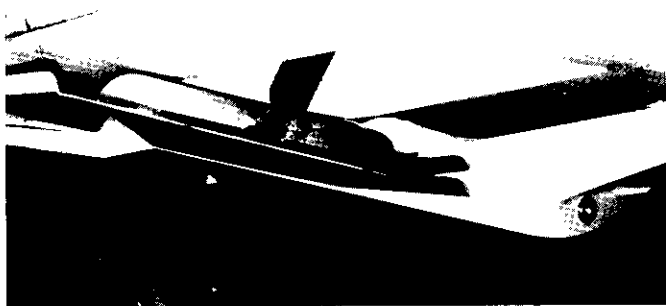

TRIM TAB

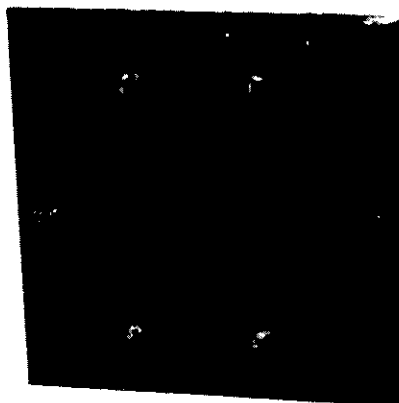

TRIM TAB SWITCH

The trim tabs are operated by a two rocker switch panel and will aid in trimming the boat fore and aft for a smoother ride. The switches are marked "bow down". Trim tabs in the extreme "bow up" positions will have no effect on the boat's ride.

Trim tabs can improve the ride of your boat by adjusting where the water is hitting the keel line. In a slight chop, the waves may be hitting the keel of your boat around the helm area, causing an uncomfortable ride. By adjusting the trim tabs and lowering the bow, the waves will hit the keel at a more forward point, softening the ride. Experimentation with trim tabs in various sea conditions will help you determine the best positions for your boat under different load conditions.

Trim tabs are also useful in correcting a port or starboard list. If the boat is listing to the port side, press the starboard trim tab switch toward "bow down". Press the port trim tab switch toward "bow down" to correct a starboard list. This will tend to lower the bow by pulling the higher side to a level position. If your bow is already in a low position, you may correct list by pressing the trim tab switch toward "bow up." This will cause the low side to rise and level the boat. It will also gradually improve the running angle.

Trim tabs in the extreme "bow down" position will cause the boat to come on plane with minimum bow rise. Unless you are operating at low speeds or with considerable cockpit weight, you will likely want to raise the tabs slightly when underway in order to avoid "plowing" water. With the tabs in the "bow down" position, you will be able to maintain a plane at the least possible RPM's.

IMPORTANT

Most drive units are equipped with an adjustable rudder trim tab. This trim tab should be adjusted to balance the steering at the speed which you travel most frequently. Variations in speed, boat load, or changes in the drive unit trim will cause the steering to pull in one direction. If the boat pulls to the left, adjust the trim tab to the left and vice-versa.

TRIM TAB PUMP LOCATION

The 300 Marlin trim tab pump is located on the bulkhead on the starboard side of the rigging compartment inboard stringer. This pump is accessible through the bench seat lid.


The 272 Sailfish trim tab pump is located behind the aft berth wall. The pump is accessed by removing the center section of the aft berth wall.

The 268 Islander trim tab pump is located in the aft rigging compartment on the starboard side. This pump is accessible through the bench seat lid.

The 263 Chase trim tab pump is located in the console rigging compartment.


PROPELLER

The condition of your propeller is a major influence on the performance of your boat. Your engine is equipped with the best size propeller for normal conditions. If you have unusual uses or weight conditions, you may require different propellers for different applications. It is advisable to keep an extra propeller on board. A damaged propeller can affect your boat's top speed, cause vibrations or a sudden drop in RPM's, or increase fuel consumption.



CAUTION: When replacing propellers, make sure you stay within the engine manufacturer's maximum and minimum RPM ranges. This information is in your engine owner's manual.

Cavitation occurs in all propeller driven boats under certain conditions. It is easily recognized by sudden increases in RPM's (revving) or a sudden drop in speed. This occurs when cavities, or air pockets, form around the propeller, due to a damaged propeller or improperly sized propeller. Cavitation is influenced by propeller design, speed, placement, and even water temperature. Ventilation, a similar problem, caused by air drawn in around the propeller in a tight turn or improper engine trim angle. In most cases, a change in the drive angle (trim) will correct the problem. If either of these problems persists, you will need to experiment with different size propellers, or contact your dealer.

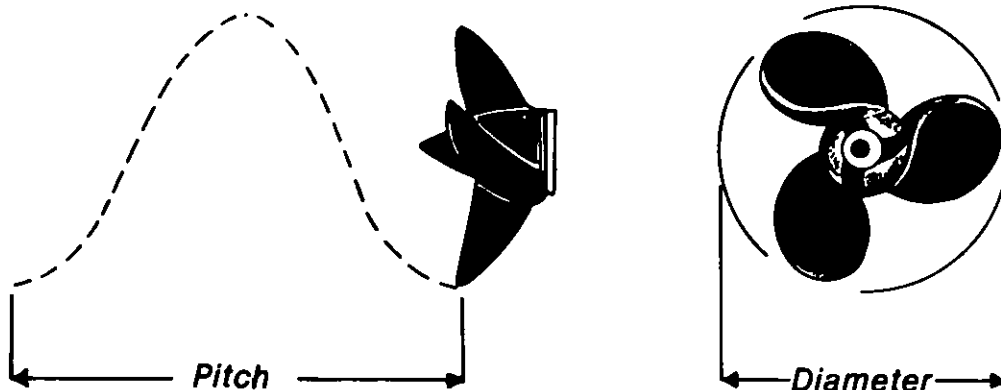

Pitch and Diameter are the two
basic dimensions of a propeller.

LOAD DISTRIBUTION

The performance of your boat is directly affected by the distribution of weight on board. Be aware of the distribution of gear, passengers, and fuel.



MAINTENANCE AND SERVICE

Your hull and deck are constructed by the hand lay-up method using the highest quality fiberglass mat and woven roving. This method of construction insures a proper fiberglass-to-resin ratio and a uniform thickness, which together result in a much stronger boat than those constructed of "chopped glass". This is an expensive process, but insures that your Grady-White is the strongest, most durable fiberglass boat possible.

Proper maintenance of your boat is not only a source of pride but is the key to maintaining your boat's value. A few simple steps will keep your fiberglass Grady-White looking showroom bright for years.

FIBERGLASS FINISH

The exterior, or gelcoat, of your Grady-White is a thin layer of resin with a finished color pigment. It is used for cosmetic purposes and makes routine maintenance relatively simple.

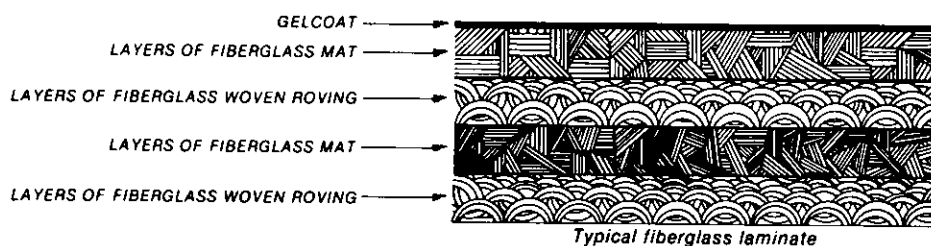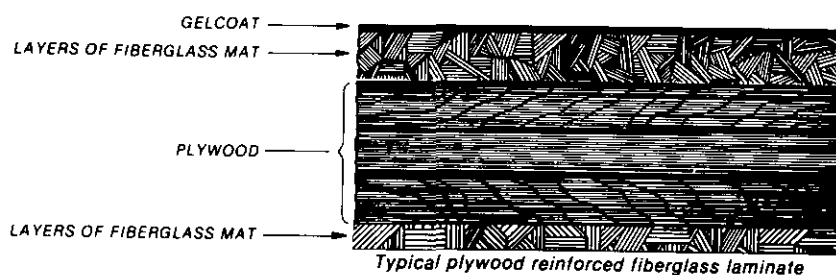

The gelcoat of your Grady-White is the finest available. The best method of cleaning the boat is with a mild household detergent and plenty of fresh water. A coat of wax (either automobile or boat wax will do) will maintain the smooth, glossy finish and protect the boat's surface. **Do not** wax surfaces that may be walked on, as they will become quite slippery.

Though gelcoat is a very durable material, it can still be subject to scratches, blistering, and web-like cracks (crazing) over time. It is elastic enough, however, to withstand strong blows while flexing with the hull's movement. Gelcoat problems are cosmetic and will not affect the structural integrity of your boat.

If you leave your boat in the water for more than a few days at a time the hull bottom, below the waterline, should be painted with anti-fouling paint to protect it from marine growth, and barnacles, which inhibit performance. Since anti-fouling paint slowly dissolves to prevent marine growth, inspection and cleaning of the boat bottom at least once per season is advisable. Repaint whenever necessary. We suggest the use of an epoxy barrier coat to be applied in conjunction with the anti-fouling paint to help prevent blistering.

GELCOAT

Many gelcoat imperfections such as, nicks, scratches, and obsolete holes, can be repaired by obtaining a gelcoat color matched patch kit from your local Grady-White dealer. Acetone, the most suitable cleaning agent for gelcoat, may also be purchased. Follow the direction in the kit for step by step instructions. It is important to heed all cautions documented in the instructions.

Most cracks can be patched because they are only gel cracks. This can be determined in preparing the area. Keep in mind that if the crack extends past the gelcoat surface and into the fiberglass a more extensive repair is required. We suggest you consult your dealer for additional instructions.

When painting with gelcoat in a bilge area, a surfacing agent should be used.



WARNING! M.E.K. (Methyl ethyl ketone peroxide), gelcoat, and acetone are flammable and hazardous if not handled properly. Follow instructions on the containers carefully. After the gelcoat is catalyzed, it may become hot in the mixing container and catch on fire. Before disposal, submerge gelcoat under water until cool.

UPHOLSTERY

Your interior vinyl upholstery may be cleaned with a mild solution of household detergent and fresh water. Commercially available cleaners for vinyl also work well. Be sure to follow the instructions on the label.

Most cabin cushions are removable and may be dry cleaned. Some cabin cushions are of a Herculon-type fabric and may be cleaned with upholstery cleaner. DO NOT MACHINE-WASH THESE FABRICS.

Since the seams of your upholstery are not water proof, your upholstery should be stored in the cabin or covered when not in use.

CANVAS

Follow these steps to maintain your boat's top and other canvas:

1. Wash canvas periodically with a heavy-duty detergent and warm water. Do not use petroleum-based or ammonia cleaners on canvas or clear vinyl as they will yellow.
2. Lubricate the snap buttons and zippers with petroleum jelly or paraffin.
3. Clean clear vinyl thoroughly with denatured alcohol, and then apply a protective layer of clear wax. Do not use paste wax as it will turn vinyl yellow. This process should be repeated as necessary to maintain the protective wax coating.
4. Store and secure canvas before trailering.
5. Dry all canvas before storing to prevent mildew.
6. Remove the top, front, and side panels and roll them up for storage. This procedure is necessary to prevent the front and side vinyl pieces from cracking. NEVER FOLD THESE PIECES!

Though your Grady-White boat's canvas is made using the highest quality vinyl and latest sewing techniques, your boat's canvas will not be completely leak proof. The seam holes in your canvas may stretch and tend to leak. However, you can correct much of this problem by applying paraffin over the seams. *Plastic Seam Sealer 800-626-2783*

Please understand that Grady-White does not warrant the fit and design of the canvas to be completely watertight. For more information refer to the pamphlet provided in your boat package.

DURATRIM/POLYETHYLENE/PLEXIGLASS

In the cockpit areas of your boat, duratrim and polyethylene are used for trim work. Duratrim has an appearance similar to teak, but requires almost no maintenance. Maintenance of your duratrim should include regular cleaning with soapy water and an application of a surface protector once or twice per season. We recommend PENETROL*. Never sand your duratrim! Polyethylene can be cleaned using a product such as 409, a spray and wipe cleaner. Your plexiglass, used to cover your instruments and radiobox, can be maintained by use of a glass cleaner with a soft cloth.

*PENETROL

Copyright 1983 The Flood Company
For a dealer near you call 1-800-321-3444

HARDWARE/HARDTOP FRAME

Even though your hardware is made of laboratory grade 316 stainless steel, it needs regular cleaning to maintain it's "less staining" properties. Use a mild solution of soap and FRESH water to clean your stainless steel after using your boat. If a stronger solution is needed, add a small amount of vinegar to the soap and water. Cleaning should be followed with a fresh water rinse.

Stains and discoloration may be removed with a non-abrasive metal cleaner. You should **NOT** try to remove stainless steel stains with an acidic solution, such as a household cleaner. In fact, where acid rain is a problem, you should rinse your boat with fresh water after each rainfall.

The key to maintaining your stainless steel is to keep it clean. Try to remove all salt or dirt from your stainless steel on a regular basis. Also, remember to rinse your hinges on baitwells and fishboxes regularly with fresh water. Hinges may need a small amount of penetrating oil to avoid sticking and rusting. We recommend using the product mentioned, on page 40, called T9*.

FUEL TANK COMPARTMENT

Your fuel tank area needs to be rinsed periodically, especially when used in a salt water environment. Dirt that collects in this area attract salt and can cause salt crystals to form. Salt crystals can eat holes in most metal surface. To help prevent your fuel tank from rust and corrosion rinse with **FRESH** water. Remove access plates and check for any possible leaks and make sure all lines are secure.

The access plates, on your gastank lid(s), keep this compartment sealed. Over a period of time the popping up of these plates cause the o-ring to wear-out. In order to ensure these plates seal properly, the o-ring needs to be replaces periodically.

SCUPPERS

Your Grady-White boats has a self-bailing cockpit, meaning that water on the cockpit floor drains through overboard drains rather than into the bilge. The stern drains (scuppers) have an external scupper flap assembly (as shown below), which restricts the flow of water back into the boat. Inspect the flaps periodically to make sure that they are free of debris. The scupper flaps will need periodic replacement.



HARDWARE MOUNTING

When drilling mounting holes in boat surfaces, make sure each hole is sealed properly. Sealing will prevent water leakage, which is especially important in fiberglass areas that have been reinforced with plywood. A hole sealed improperly allows water inside the fiberglass, which leads to saturation of the plywood reinforcement.

BATTERY

Regardless of the type of power your boat uses, your batteries are extremely important. They should be secured in a non-metallic tray to avoid electrolyte spills, and battery terminals should be covered by an insulated boot.


Check the fluid level in each battery cell at least once a month. Fill the battery to the upper level with distilled water. Never overfill the battery.

Keep terminals clean by scrubbing them with a stiff brush and a mixture of baking soda and water. Afterwards, apply a light coat of grease. Be careful not to let any of the baking soda/water mixture enter the battery.

When not in use, check the batteries each month by using a battery hydrometer, which measures the specific gravity. The meter should read between 1250 and 1280.



CAUTION: Never disconnect a battery when the engine is running as damage to the charging system could result. When replacing your battery, **DO NOT** replace with a deep cycle battery; due to your engines charging system.

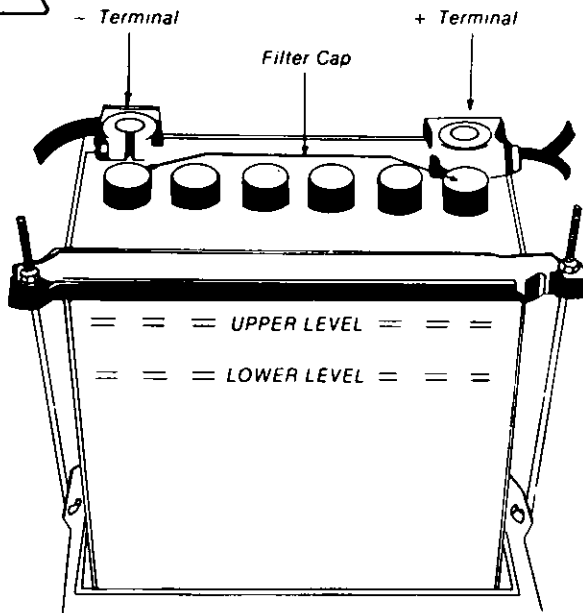

The battery contains sulfuric acid. Avoid contact with skin, eyes or clothing. Antidote: **EXTERNAL** — Flush with water. **INTERNAL** — Drink large quantities of water or milk. Follow with milk of magnesia, beaten egg or vegetable oil. Call physician immediately. Eyes: Flush with water and get prompt medical attention. Batteries produce explosive gases. Keep sparks, flame, cigarettes away. Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries.

KEEP OUT OF REACH OF CHILDREN.

Remember, when disconnecting and reconnecting battery cables that the black cable must be connected to the negative terminal, and the red cable must be connected to the positive terminal of the battery. Reversing this procedure will immediately damage your system.

RIGGING COMPARTMENTS

The 300 Marlin has a rigging compartment located aft of the fuel tank compartments. This compartment is functional for rigging ignition protected accessories and for better access to rigging components located aft of this compartment. This compartment contains two flats for mounting transducers.

The rigging hatch and mounting screws must be sealed with silicone sealer after rigging is complete. If the lid is removed, it must be resealed to insure watertight integrity.

WINTERIZATION AND STORAGE

If your boat is out of use for the winter or an extended period of time, special attention should be paid to areas that may be damaged by freezing temperatures. Even if you live in a warm climate, you should inspect your boat on an annual basis.

The winterizing check can be done by a knowledgeable boat owner but preferably by a professional with a competent staff of technicians at your Grady-White dealership. Either way, the following checklist is a good place to start:

1. Check your engine owner's manual regarding the procedures for winterizing the engine. Follow these important instructions carefully and your engine should survive the most severe weather conditions. Change all filters, check hoses and clamps. If you have developed any vibrations during the season, look for loose engines, bent shafts, or bent propellers.
2. Clean and wax your boat before storage. If you store your boat in the water, there may be a layer of growth on the bottom in addition to the anti-fouling paint. As it dries, this debris will harden, so scrub the bottom immediately after the boat is removed from the water.
3. Raise and block the trailer axle to prevent tire deterioration. This is an excellent time to lubricate and pack the wheel bearings per manufacturer's instructions.
4. Drain all water tanks, lines, and pumps to prevent freeze damage. The fresh water system may be drained by running any faucet until the tank is empty. When empty, turn the faucet off to prevent pump damage. Residual water will not damage the tank. If desired, the fresh water system may have a nontoxic antifreeze added. This antifreeze can be purchased at most marine dealerships or camping dealers. If your boat is equipped with a freshwater windshield washer, the washer reservoir should also be drained. Never add washer fluid or deicer to this system since exposure to this fluid with the washer in use could cause injury. To drain other lines, close seacocks and run the pumps until the lines are dry. In warmer climates, draining will help prevent water stagnation.
5. Remove the bilge drain plug and open all valves and seacocks to keep the bilge dry. Store your boat with the bow elevated to help drainage.

6. The fuel tank compartment needs to be rinsed with fresh water to keep salt crystal from forming thus causing rust and corrosion to your fuel tank. See page 36.
7. Make sure your fuel does not contain alcohol, keep your fuel tanks full during storage or periods of infrequent use to prevent condensation of water vapor and subsequent engine malfunction. There are also additives available to inhibit condensation. Fuels containing alcohol will absorb humidity, and the resulting condensation will separate from the fuel as the temperature drops during winter months, causing corrosion. This is a good time to have your fuel filters changed, if they have not been changed recently.
8. Check the electrolyte level in your batteries and fully charge the batteries before storing. A weak battery loses its charge more rapidly than a strong battery. Ideally, you should disconnect the batteries and cover the terminals with grease to prevent corrosion. Store batteries in a cool, dry area on a wood board. Do not store batteries on concrete, because the cold, moist surface will drain them.
9. Store cabin cushions and other cushions indoors when possible to prevent mildew.
10. Pull all of your electronics and store them inside. Your compass should be covered for the winter, as ultraviolet rays from the sun will "cloud" the compass and make it difficult to read.
11. Check cleats, chocks, and rails for corrosion and tightness. Use a good quality metal preservative like T-9** on all metal surfaces to prevent saltwater damage.
12. Check for loose silicone, hinges, and unseated gaskets, and replace or tighten where necessary. Heavy seas pounding and twisting the hull can cause leaks in your windows, doors, and hatches. Check all hinges for corrosion and lubricate them.
13. Make sure that the keel, chines, and transom are fully supported.

**The T-9 metal protection product was developed by Boeing Aviation for long-term protection of aircraft. It works by penetrating deeply into fasteners and fixtures, displacing moisture and drying to a clear wax film that lubricates and protects metals for months. T-9 can be used to protect deck hardware, engines, electronics, and fishing tackle.

HEAD OPERATING INSTRUCTIONS

MARINE ELECTRIC HEAD (268,272,300)

OPERATION

1. Open the inlet seacock (to vertical position). The seacock is located under the cabin floor access plate on starboard side.
2. Flush toilet by pressing the button above the toilet.

EMPTYING HOLDING TANK BY USE OF OVERBOARD DISCHARGE

1. Open the discharge seacock (to vertical position), which is located under cabin floor access plate on port side.
2. Turn the monitor "on" at the control panel.
3. Press discharge button until lights on the control panel indicate the tank is empty.
4. Turn the monitor "off" and close discharge seacock (to horizontal position).


EMPTYING HOLDING TANK THROUGH DECK PUMP-OUT

1. Remove the cap from deck pump-out, located on the walkaround, starboard for 268, 272 and port for 300.
2. Connect the vacuum hose and run until the tank is empty. Replace the cap on deck pump-out.

HAND PUMP MARINE HEAD (268,272,300)

OPERATION

1. Open the inlet seacock (to vertical position), which is located under cabin floor access plate on starboard side.
2. Fill the toilet with water by pulling the valve handle to the vertical position. Pump handle two or three times.
3. Flush toilet by pumping handle two or three times, leaving the valve handle in the vertical position.
4. Return valve handle to the horizontal position and pump handle until all water is removed from bowl. Leave toilet in the "flush dry" position when not in use.

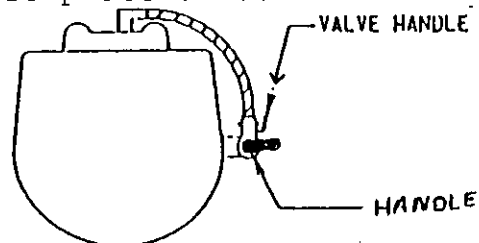

EMPTYING HOLDING TANK BY USE OF OVERBOARD DISCHARGE

1. Open the discharge seacock (to vertical position), which is located under the cabin floor access plate on port side.
2. Turn the monitor "on" at the control panel.
3. Press discharge button until lights on the control panel indicate the tank is empty.
4. Turn the monitor "off" and close discharge seacock (to horizontal position).

EMPTYING HOLDING TANK THROUGH DECK PUMP-OUT

1. Remove the cap from deck pump-out, located on the walkaround, starboard side 268, 272 and port side 300.
2. Connect the vacuum hose and run until the tank is empty. Replace the cap on deck pump-out.

PORTABLE HEAD WITH IN-LINE MACERATOR (263,268,272)**OPERATION**


1. Compress the bellows pump, located on the left corner of toilet a few times, to add water to the bowl.
2. Flush the toilet by pulling the slide valve handle out (located on the front of toilet).
3. Compress the bellows pump until the bowl is rinsed.
4. Close the slide valve handle by pushing it in fully.

EMPTYING RESERVOIR BY USE OF OVERBOARD DISCHARGE


1. Place the Y-valve in the overboard discharge position, located on the aft wall, inside of console on 263, the 268 is on the vertical wall of cabin step inside access plate, and the 272 Y-valve is under aft berth floor lid.
2. Open the overboard seacock, located same as the Y-valve.
3. Turn "on" the head pump switch at helm and discharge until the reservoir is empty. Close the overboard seacock.

EMPTYING RESERVOIR THROUGH DECK PUMP-OUT

1. Place the Y-valve in the deck pump-out position, located on the aft wall, inside console on 263, the 268 is on the vertical wall of cabin step inside access plate, and the 272 Y-valve is under aft berth floor lid.
2. Remove cap from deck pump-out, located on the starboard gunwale on 263; and walkaround on the 272 and 268.
3. Connect the vacuum hose and run until the tank is empty. Replace the cap on deck pump-out.

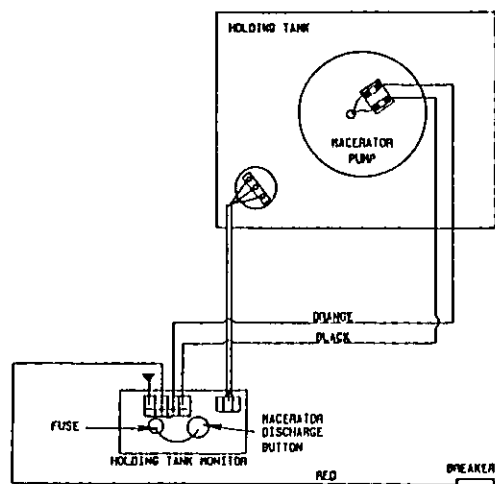

WIRING

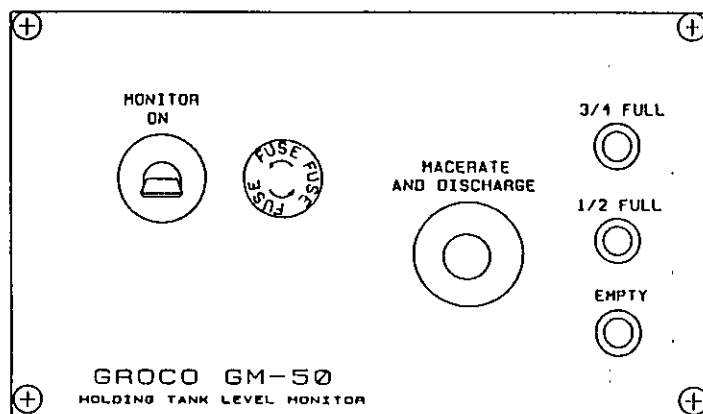

CONTROL PANEL

PORTABLE HEAD WITH DECK PUMP-OUT (263,268,272)

OPERATION

1. Compress the bellows pump, located on the left corner of the toilet several times, to add water to the bowl.
2. Flush toilet by pulling the slide valve handle out (located on the front of the toilet).
3. Compress the bellows pump until the bowl is rinsed.
4. Close the slide valve handle by pushing it in fully.

EMPTYING RESERVOIR THROUGH DECK PUMP-OUT


1. Remove cap from deck pump-out, located on the port walkaround (starboard side on the 268, 272 and starboard gunwale on 263).
2. Connect the vacuum hose and run until the tank is empty. Replace the cap on deck pump-out.

NOTICE


Overboard discharge seacock must be sealed and secured in the closed position within the three mile limit.

ACCESSORY WIRING COLOR CODE AND FUSE SIZES


ACCESSORY	WIRE SIZE AND COLOR	AMPERAGE	LOCATION
LIGHTS			
BOW LIGHT	16 GA. GRAY	15.0	ACCESSORY PANEL
AFT POLE LIGHT	16 GA GRAY/WHITE	15.0	ACCESSORY PANEL
MAST LIGHT (FORWARD BULB)	16 GA GRAY/RED	15.0	ACCESSORY PANEL
MAST LIGHT (AFT BULB)	16 GA GRAY/BLACK	15.0	ACCESSORY PANEL
PANEL LIGHTS	16 GA DARK BLUE	15.0	ACCESSORY PANEL
CABIN LIGHTS	16 GA DARK BLUE/GREEN	10.0	FUSE BLOCK
COCKPIT LIGHTS	16 GA DARK BLUE	10.0	ACCESSORY PANEL
SPREADER LIGHTS	16 GA DARK BLUE/WHITE	10.0	ACCESSORY PANEL
PUMPS			
BILGE PUMP (FORWARD):			
RULE 1100	16 GA BROWN/BLACK	5.0	ACCESSORY PANEL
RULE 1500	16 GA BROWN/BLACK	7.5	ACCESSORY PANEL
AUTO FLOAT SWITCH (FORWARD)	16 GA BROWN/RED IN LINE	5.0/7.5	NEAR BATTERY
BILGE PUMP (AFT):			
RULE 1100	16 GA BROWN	5.0	ACCESSORY PANEL
RULE 1500	16 GA BROWN	7.5	ACCESSORY PANEL
AUTO FLOAT SWITCH (AFT)	16 GA BROWN/WHITE IN LINE	5.0/7.5	NEAR BATTERY
AERATOR PUMP	16 GA ORANGE/28BROWN	2.0	ACCESSORY PANEL
SHOWER SUMP PUMP (FLOAT SWITCH)	16 GA BROWN/ORANGE	4.0	FUSE BLOCK
WATER PRESSURE PUMP (CABIN SHOWER)	12 GA ORANGE/RED	15.0	ACCESSORY PANEL
WATER PRESSURE PUMP	16 GA ORANGE/BLUE	5.0	FUSE BLOCK
WASHDOWN PUMP	12 GA ORANGE/BROWN	15.0	ACCESSORY PANEL
LIVEWELL PUMP	16 GA ORANGE/BROWN	5.0	ACCESSORY PANEL
IN-LINE MACERATOR PUMP	12 GA ORANGE/GRAY	20.0	ACCESSORY PANEL
PRIMER PUMPS (PORT)	16 GA PINK/RED	5.0	ACCESSORY PANEL
(STARBOARD)	16 GA PINK/BLUE	5.0	ACCESSORY PANEL
MISCELLANEOUS			
BILGE BLOWER	16 GA YELLOW	10.0	ACCESSORY PANEL
HORN	12 GA ORANGE/WHITE	15.0	ACCESSORY PANEL
WINDSHIELD WIPER (ACTUATOR):			
PORT	16 GA ORANGE/GREEN	5.0	ACCESSORY PANEL
STARBOARD	16 GA ORANGE/BLACK	5.0	ACCESSORY PANEL
WINDSHIELD WIPER (POSITION)	16 GA ORANGE		
WINDLASS SOLENOIDS	14 GA ORANGE/PURPLE	*	
	14 GA ORANGE/YELLOW	*	
WINDLASS POWER LEAD	4 GA RED	*	
	4 GA BLACK	*	
ACCESSORY	16 GA ORANGE	10.0	ACCESSORY PANEL
ACCESSORY GROUNDS	16 GA BLACK	N/A	
ACCESSORY GROUNDS MAINS	10 GA BLACK	N/A	
HYDRAULIC TRIM TABS	16 GA HARNESS (SUPPLIED)	20.0	FUSE BLOCK
MAIN FUEL TANK (SENDER)	16 GA PINK	N/A	ACCESSORY PANEL
AUXILIARY FUEL TANK (SENDER)	16 GA PINK/WHITE	N/A	ACCESSORY PANEL
ACCESSORY PANEL POWER LEAD	10 GA RED CIRCUIT BREAKER	40.0	NEAR BATTERY
VHF (HARDTOP RADIO BOX) POWER LEAD	10 GA RED/WHITE IN LINE	20.0	NEAR BATTERY
MEMORY WIRE	16 GA RED/PINK	2.0	NEAR BATTERY
CO MONITOR	16 GA RED/BLACK	1.0	NEAR BATTERY
OIL SENDER (STBD)	16 GA LT. BLUE	N/A	
OIL SENDER (PORT)	16 GA LT. BLUE/WHITE	N/A	
FUEL GROUNDS	16 GA GREEN	N/A	
VHF GROUND	10 GA BLACK/WHITE	N/A	

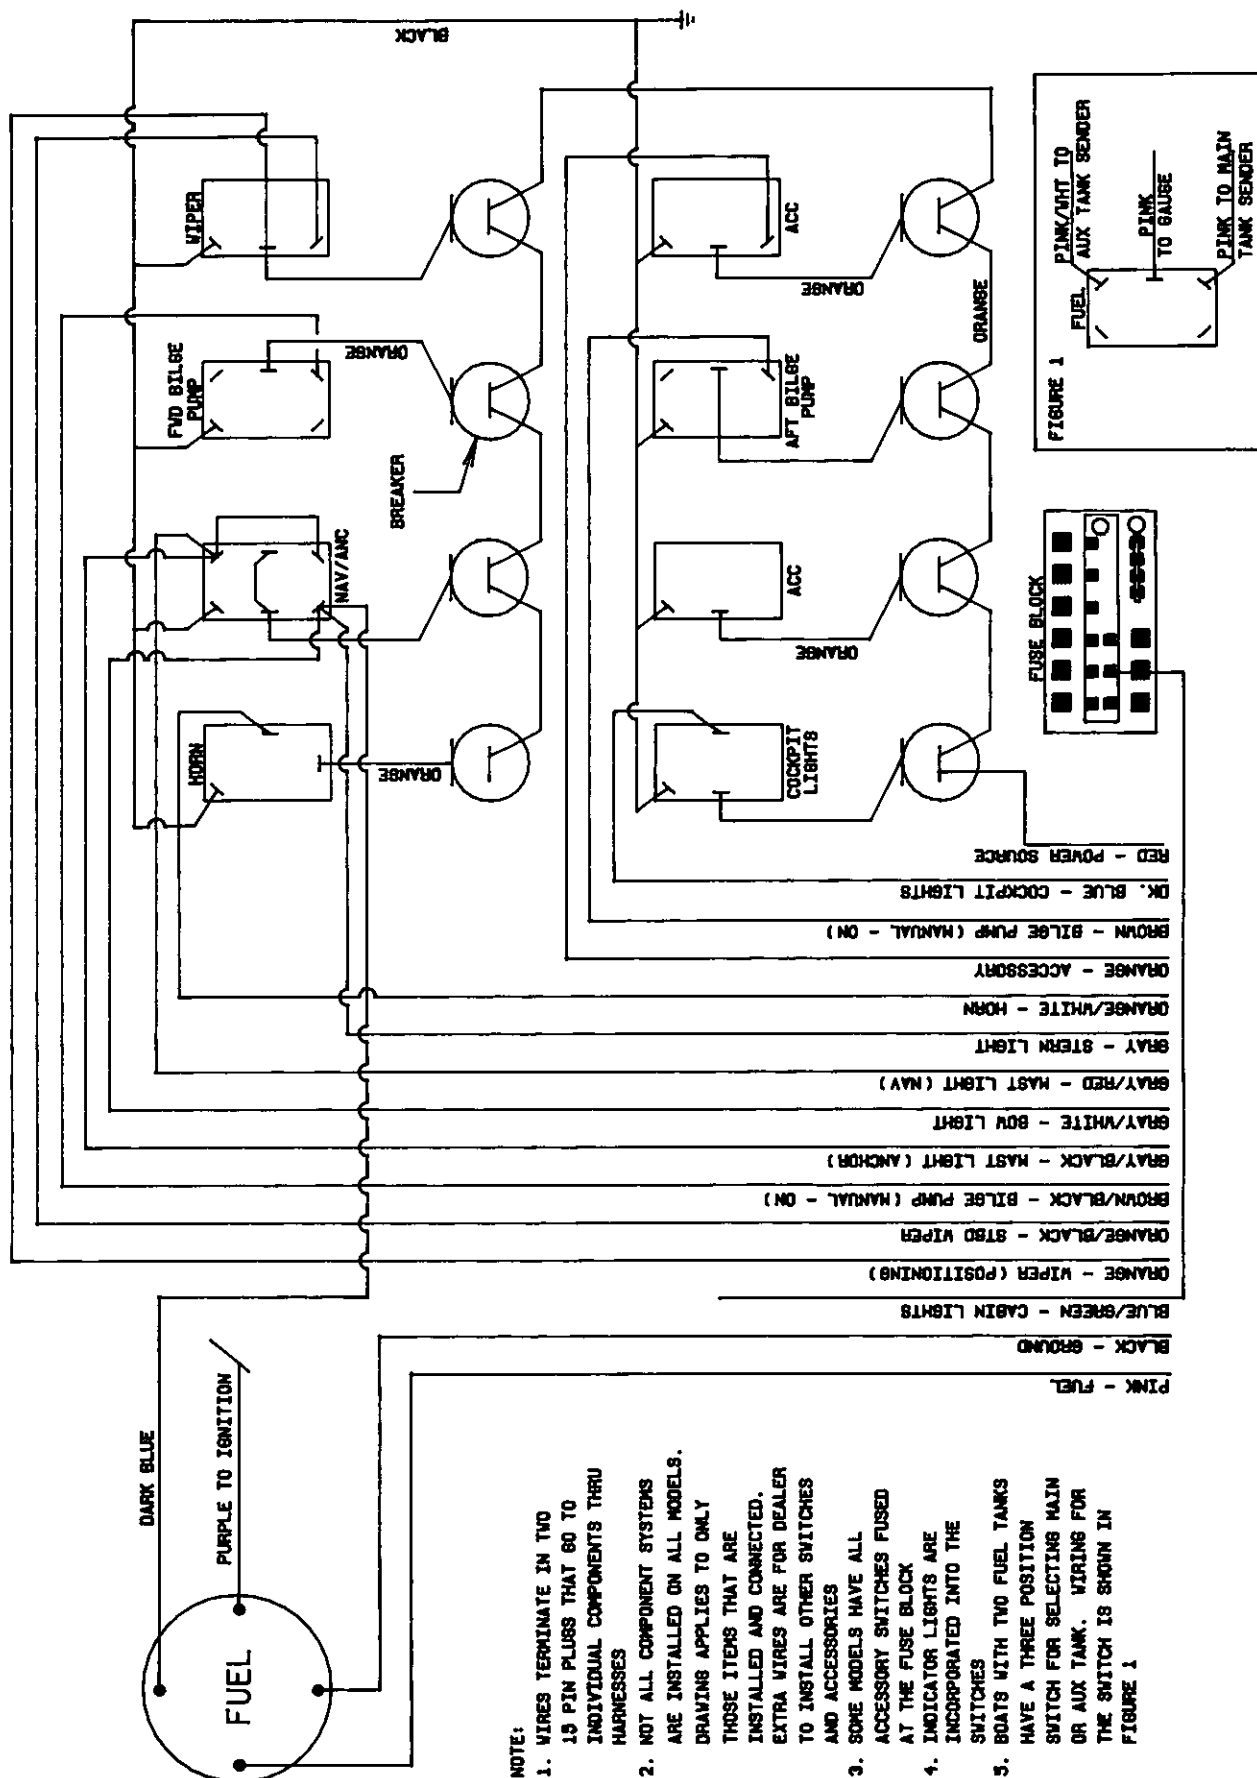

TYPICAL OUTBOARD INSTRUMENT AND SWITCH PANEL WIRING

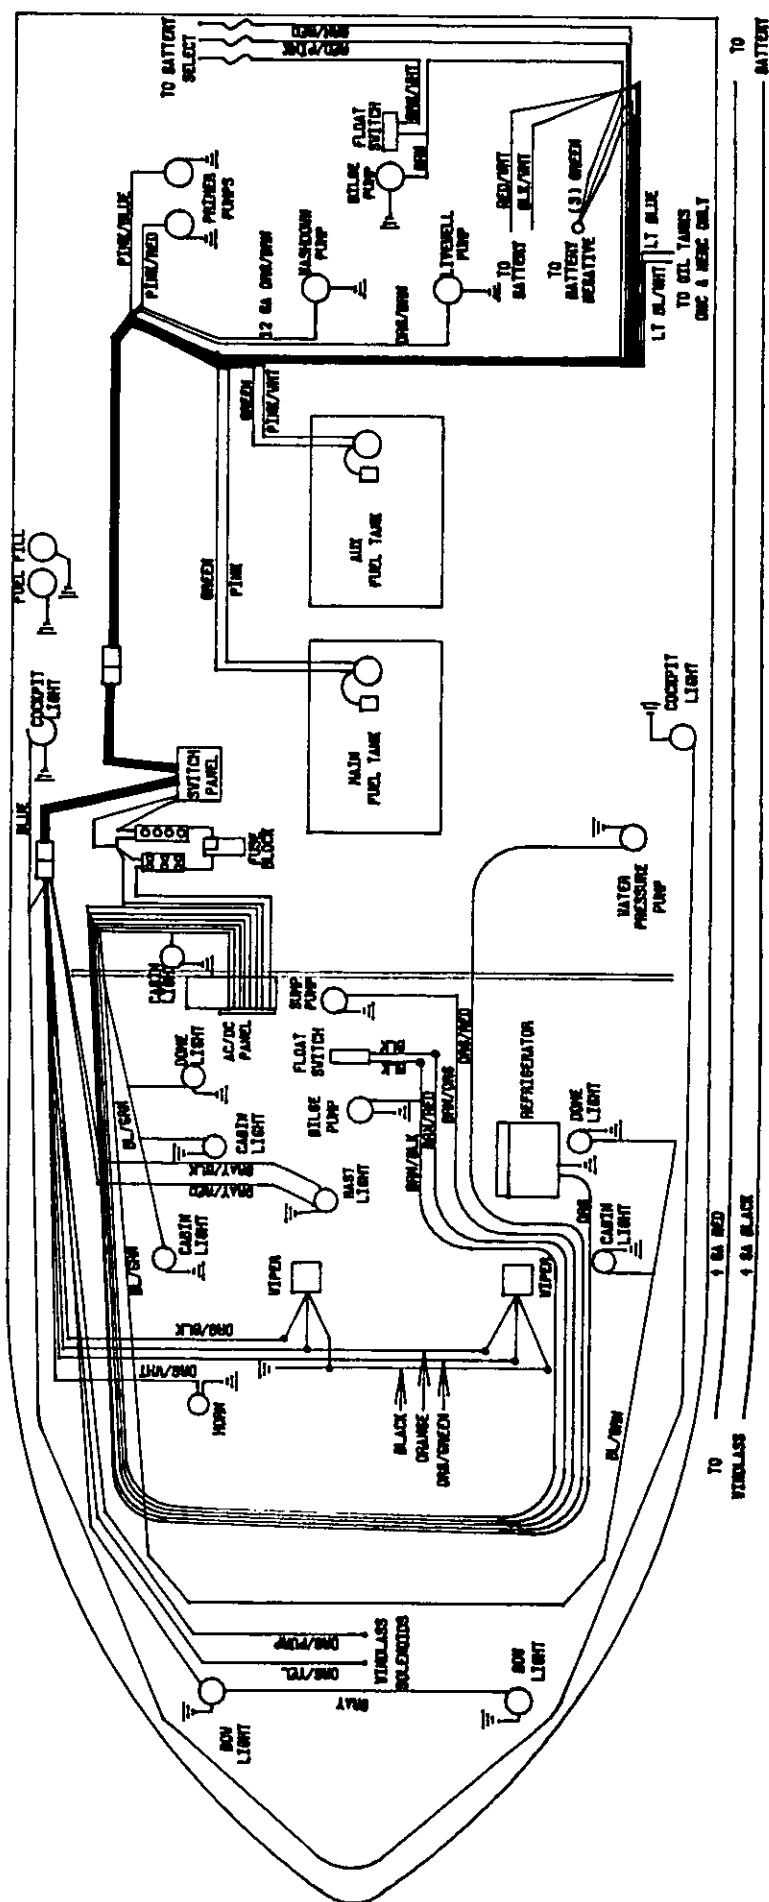


300 ACCESSORY WIRING DIAGRAM

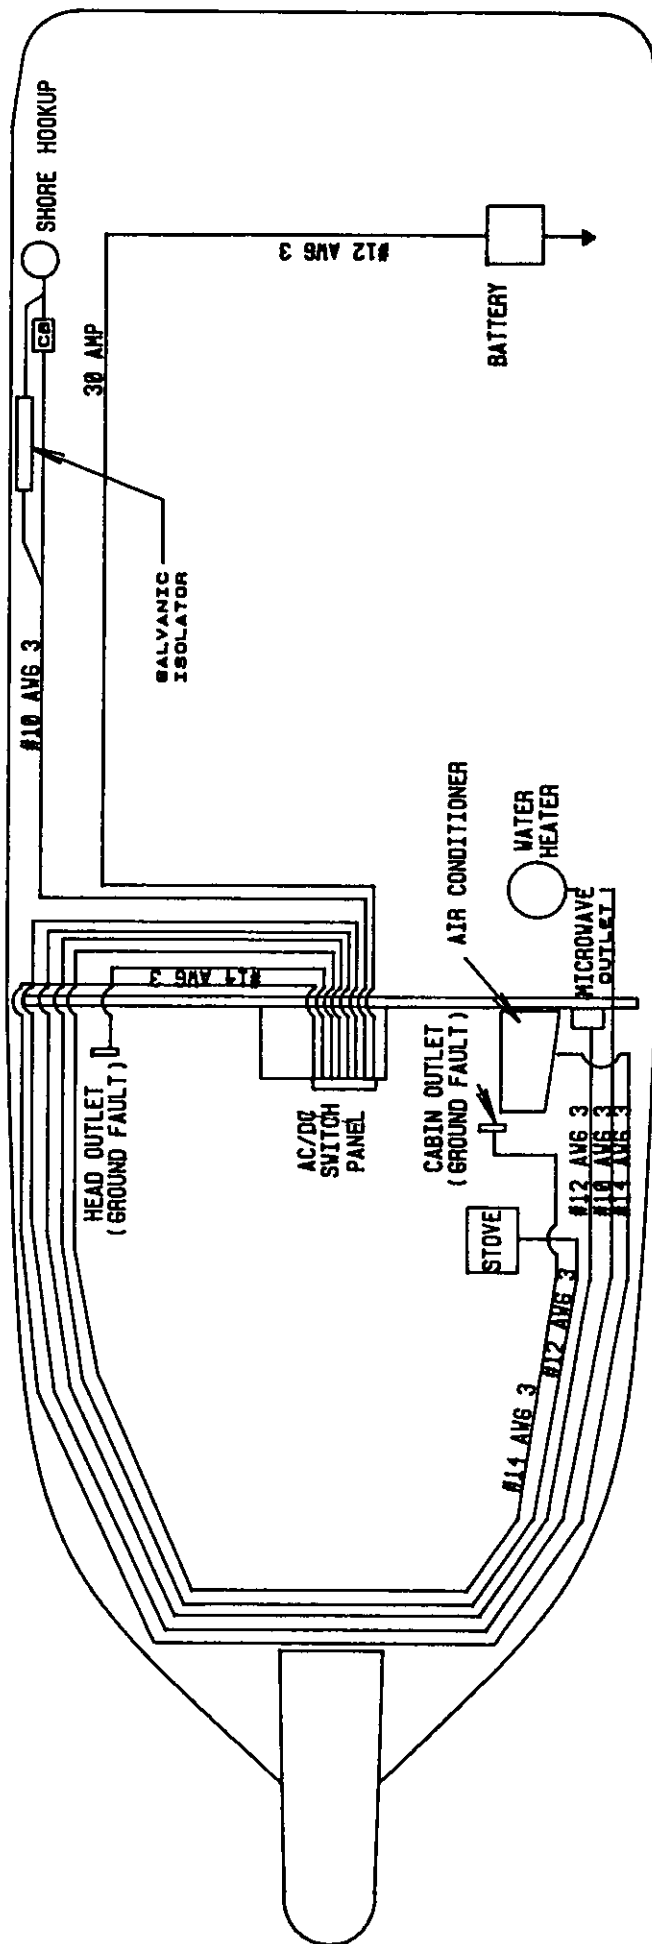




300 DOCKSIDE WIRING DIAGRAM


300 AC/DC PANEL WIRING

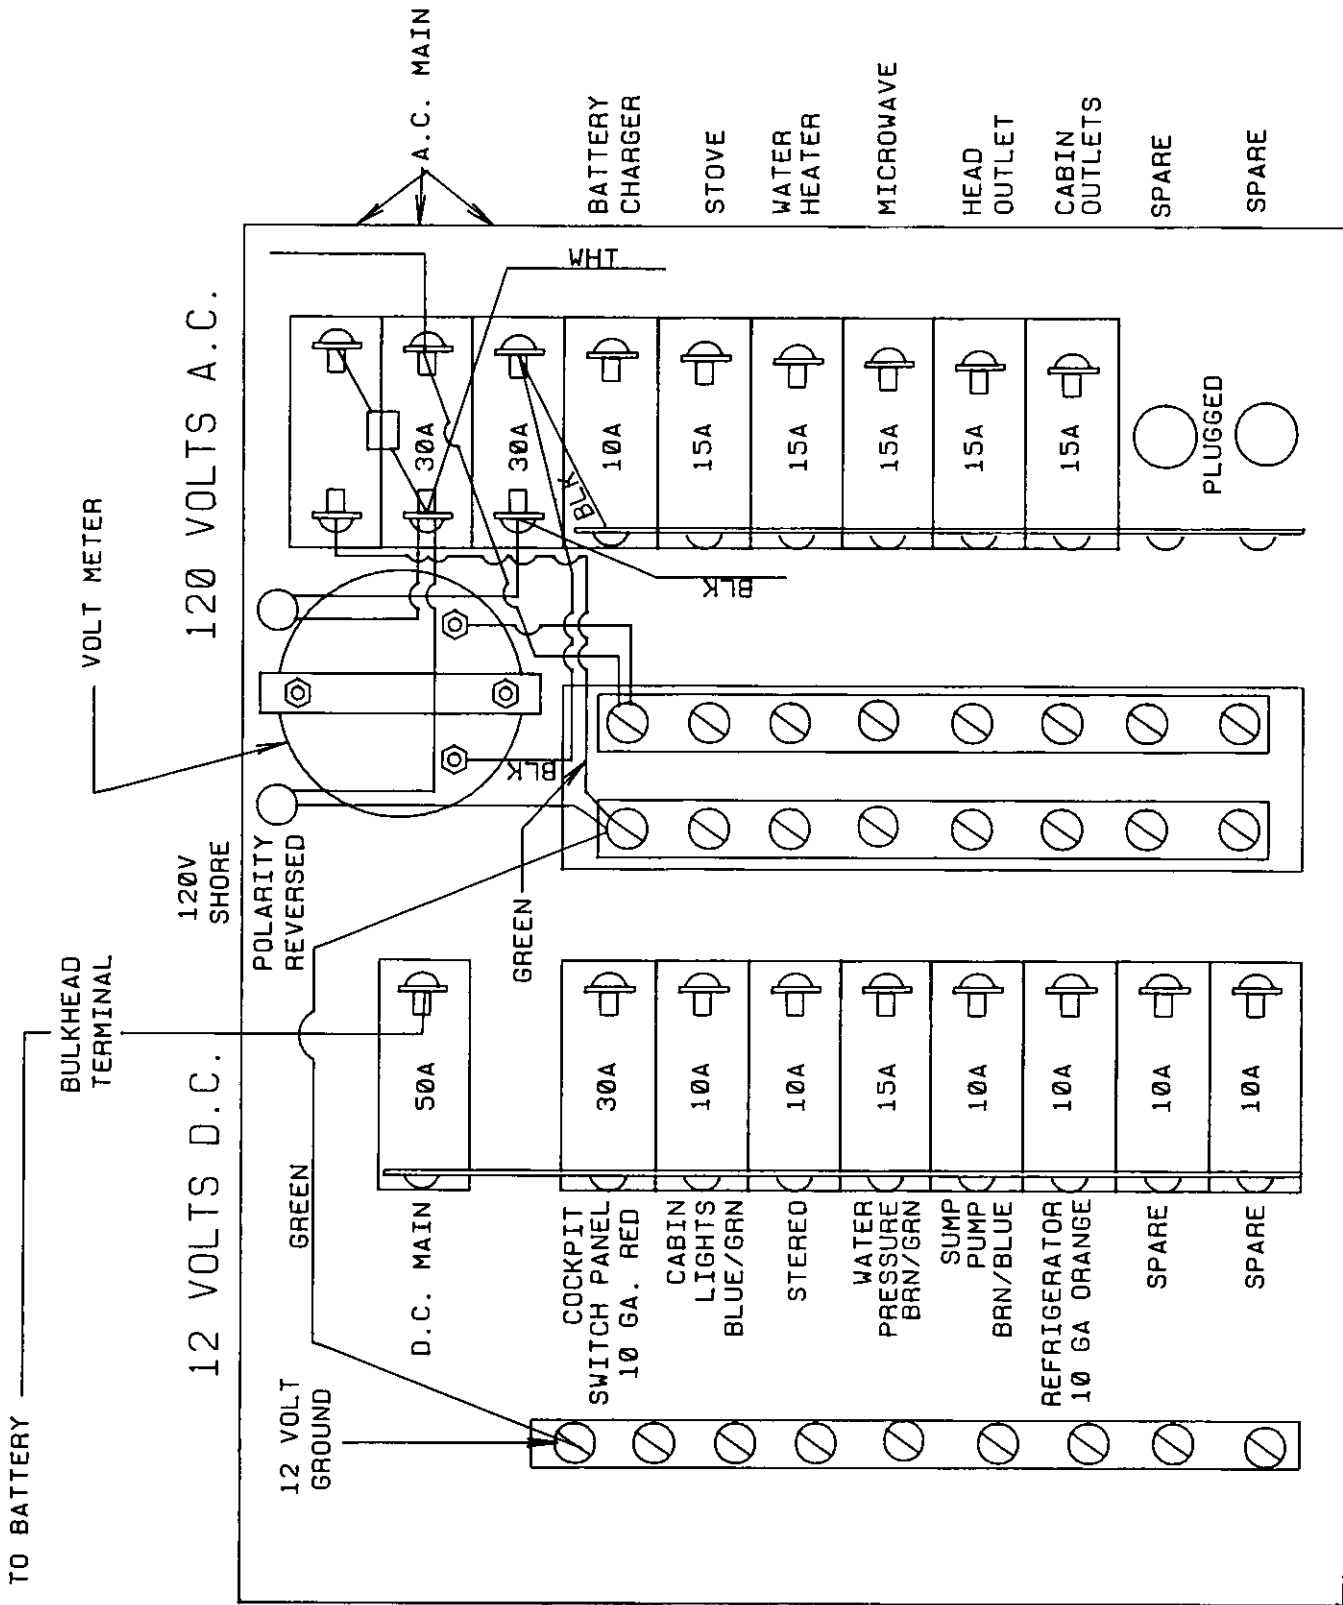



300 BATTERY SELECT WIRING


49

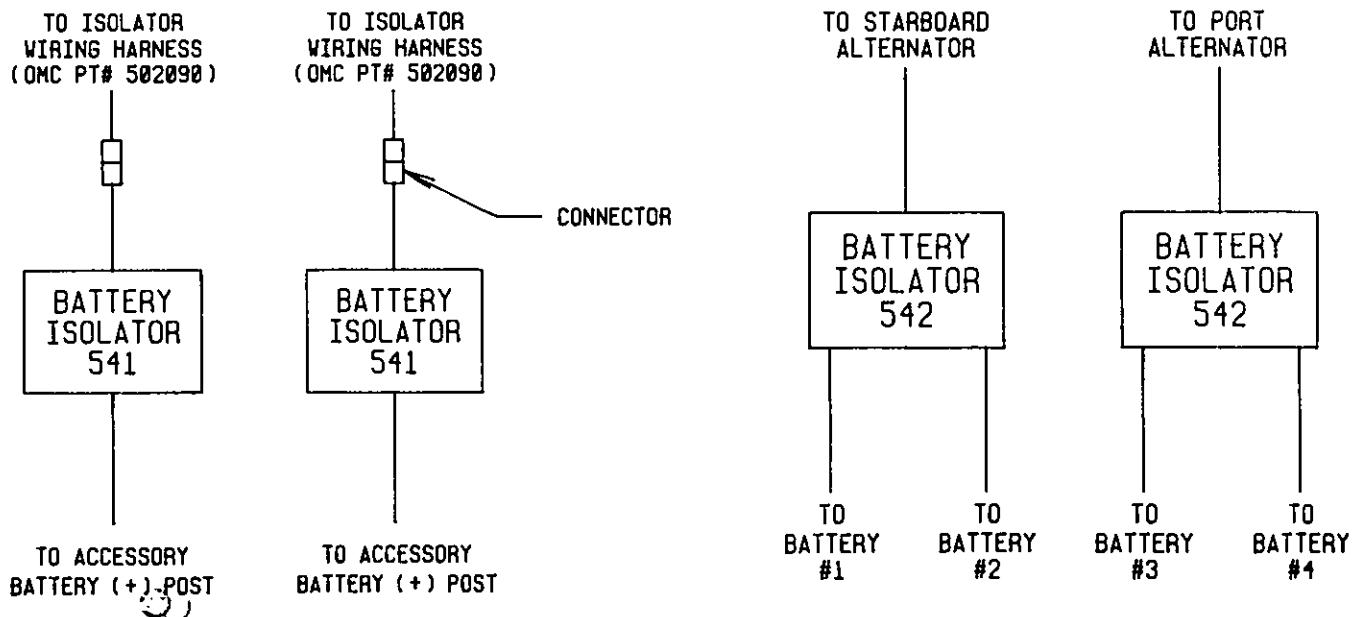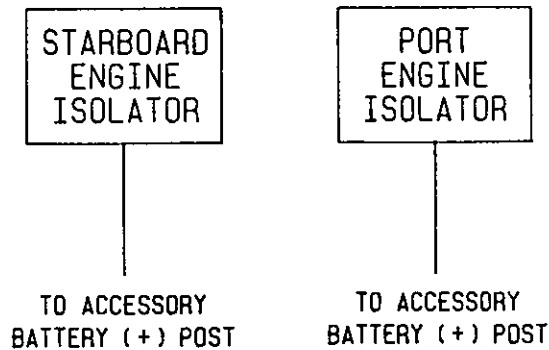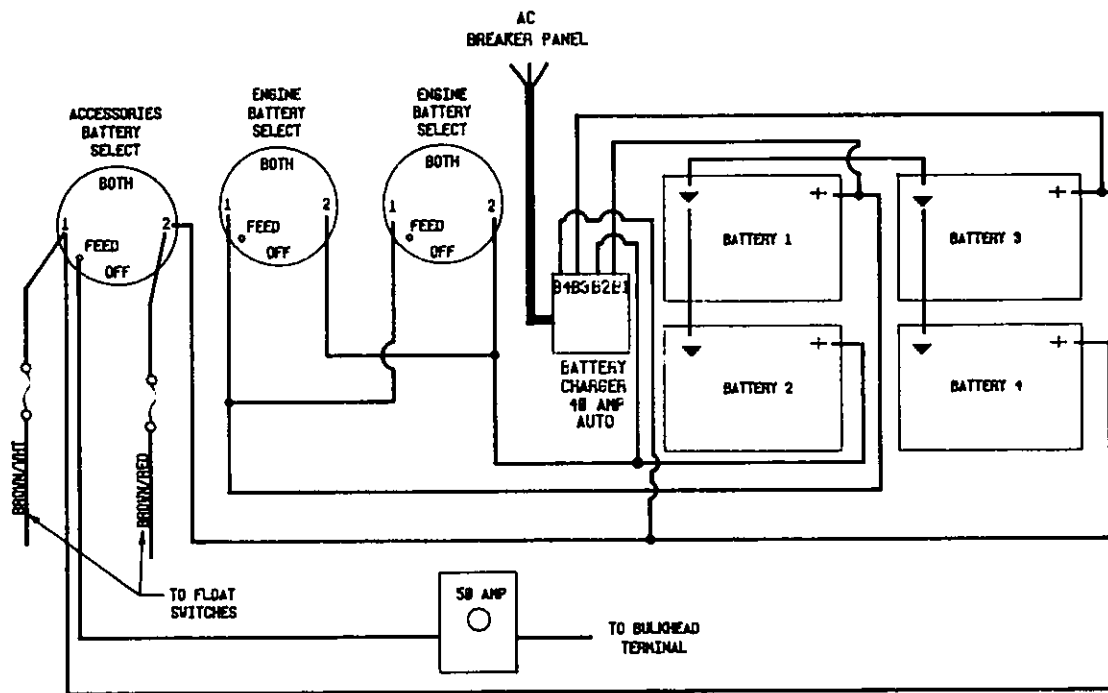

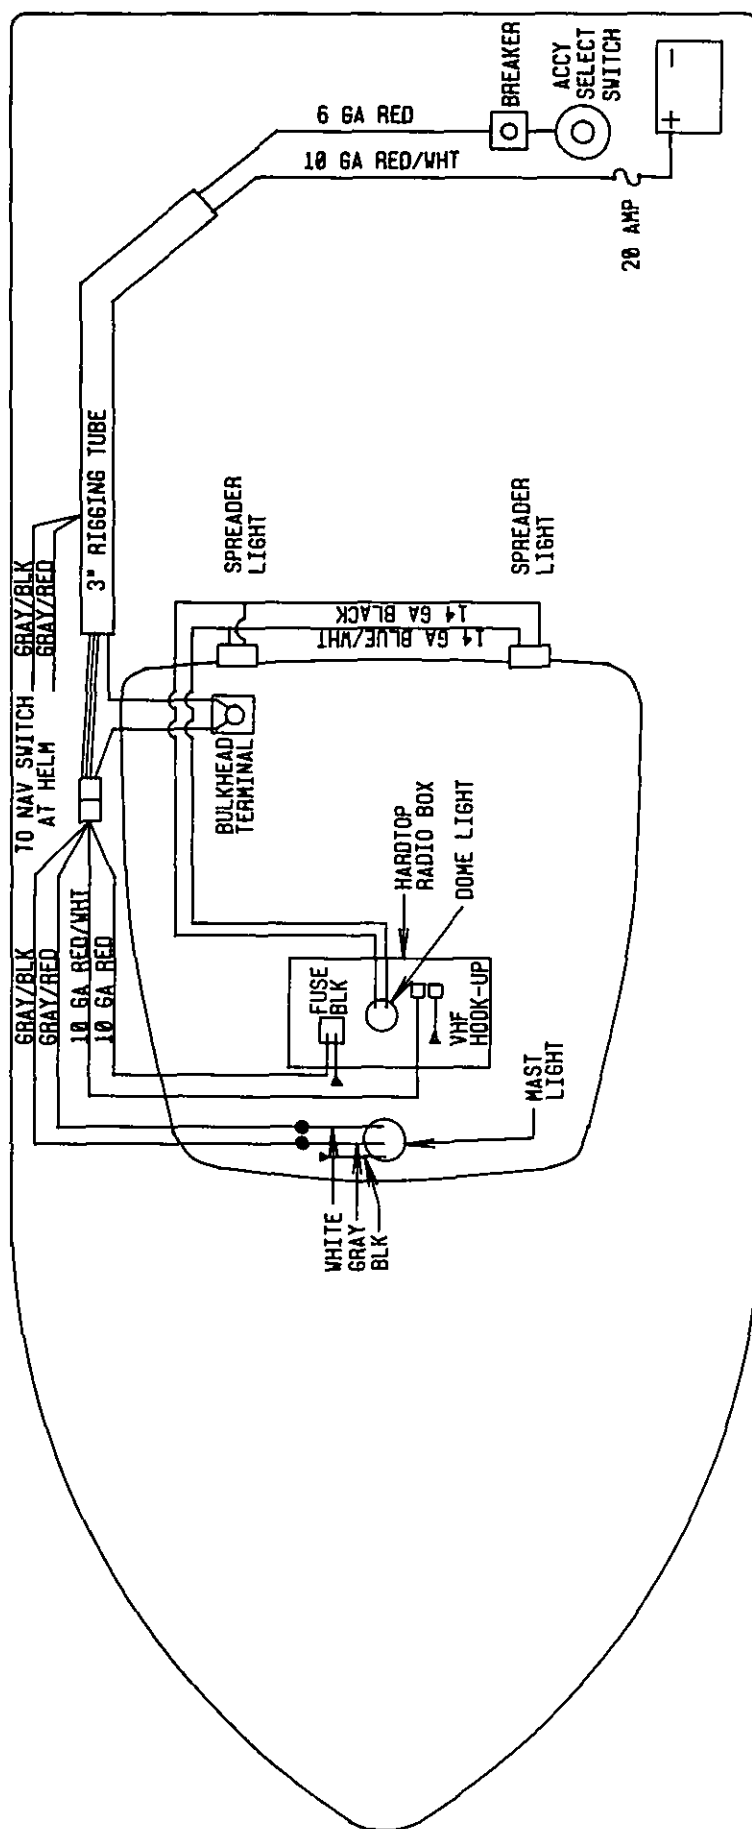

300 HARDTOP WIRING DIAGRAM

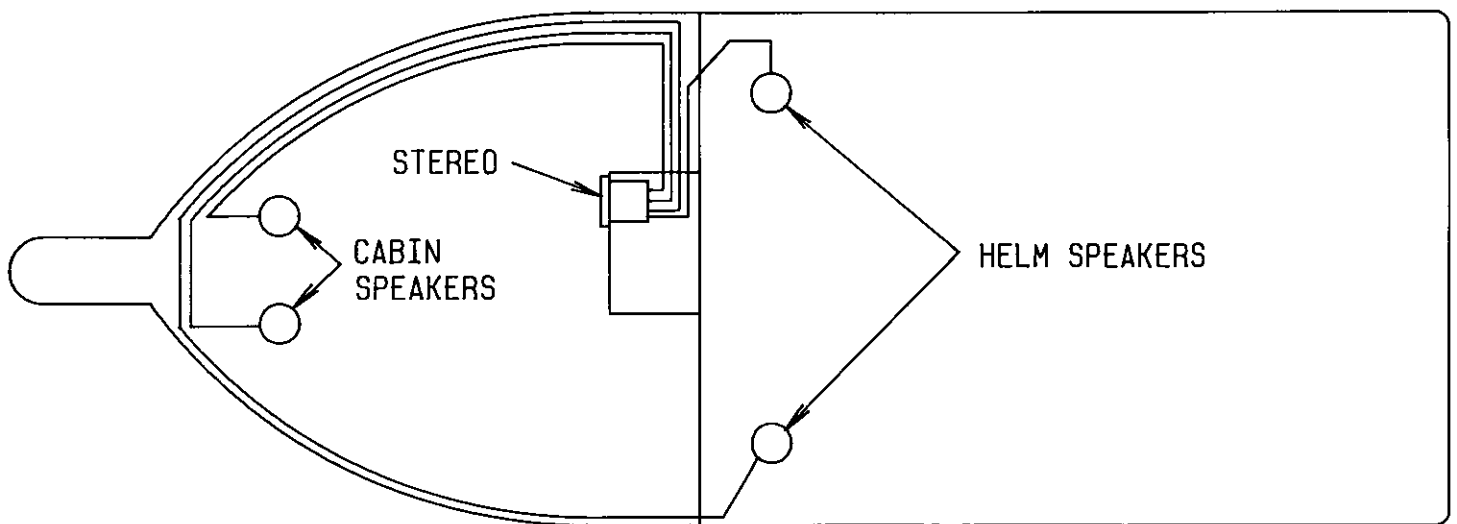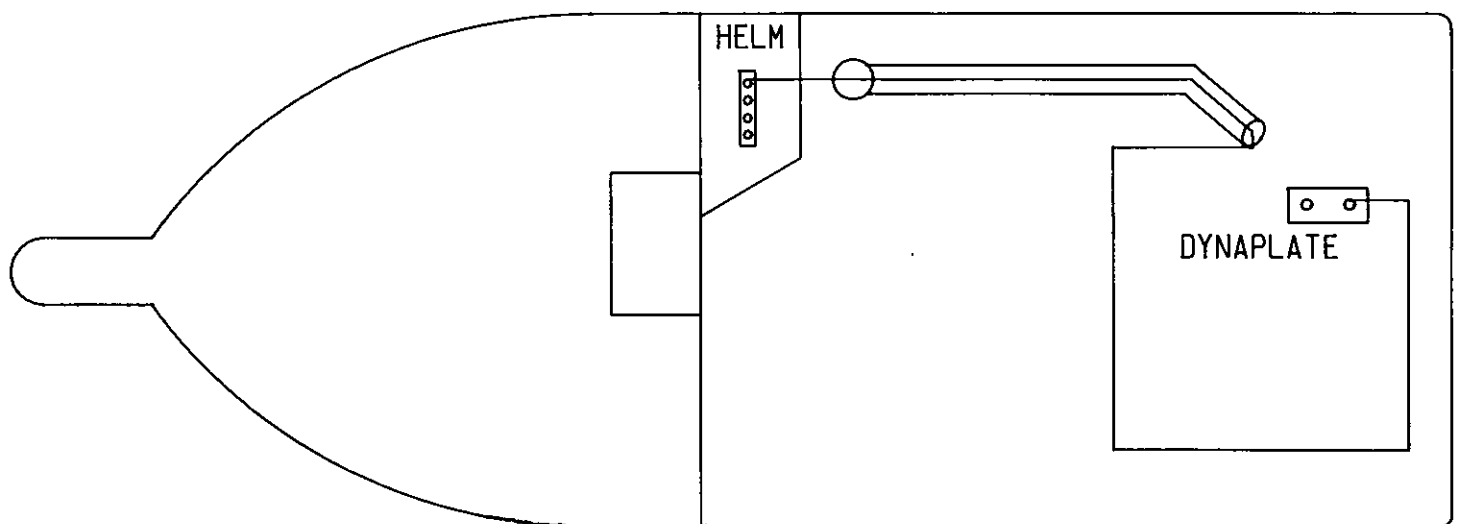
**300 STEREO WIRING DIAGRAM****300 DYNAPLATE WIRING DIAGRAM**

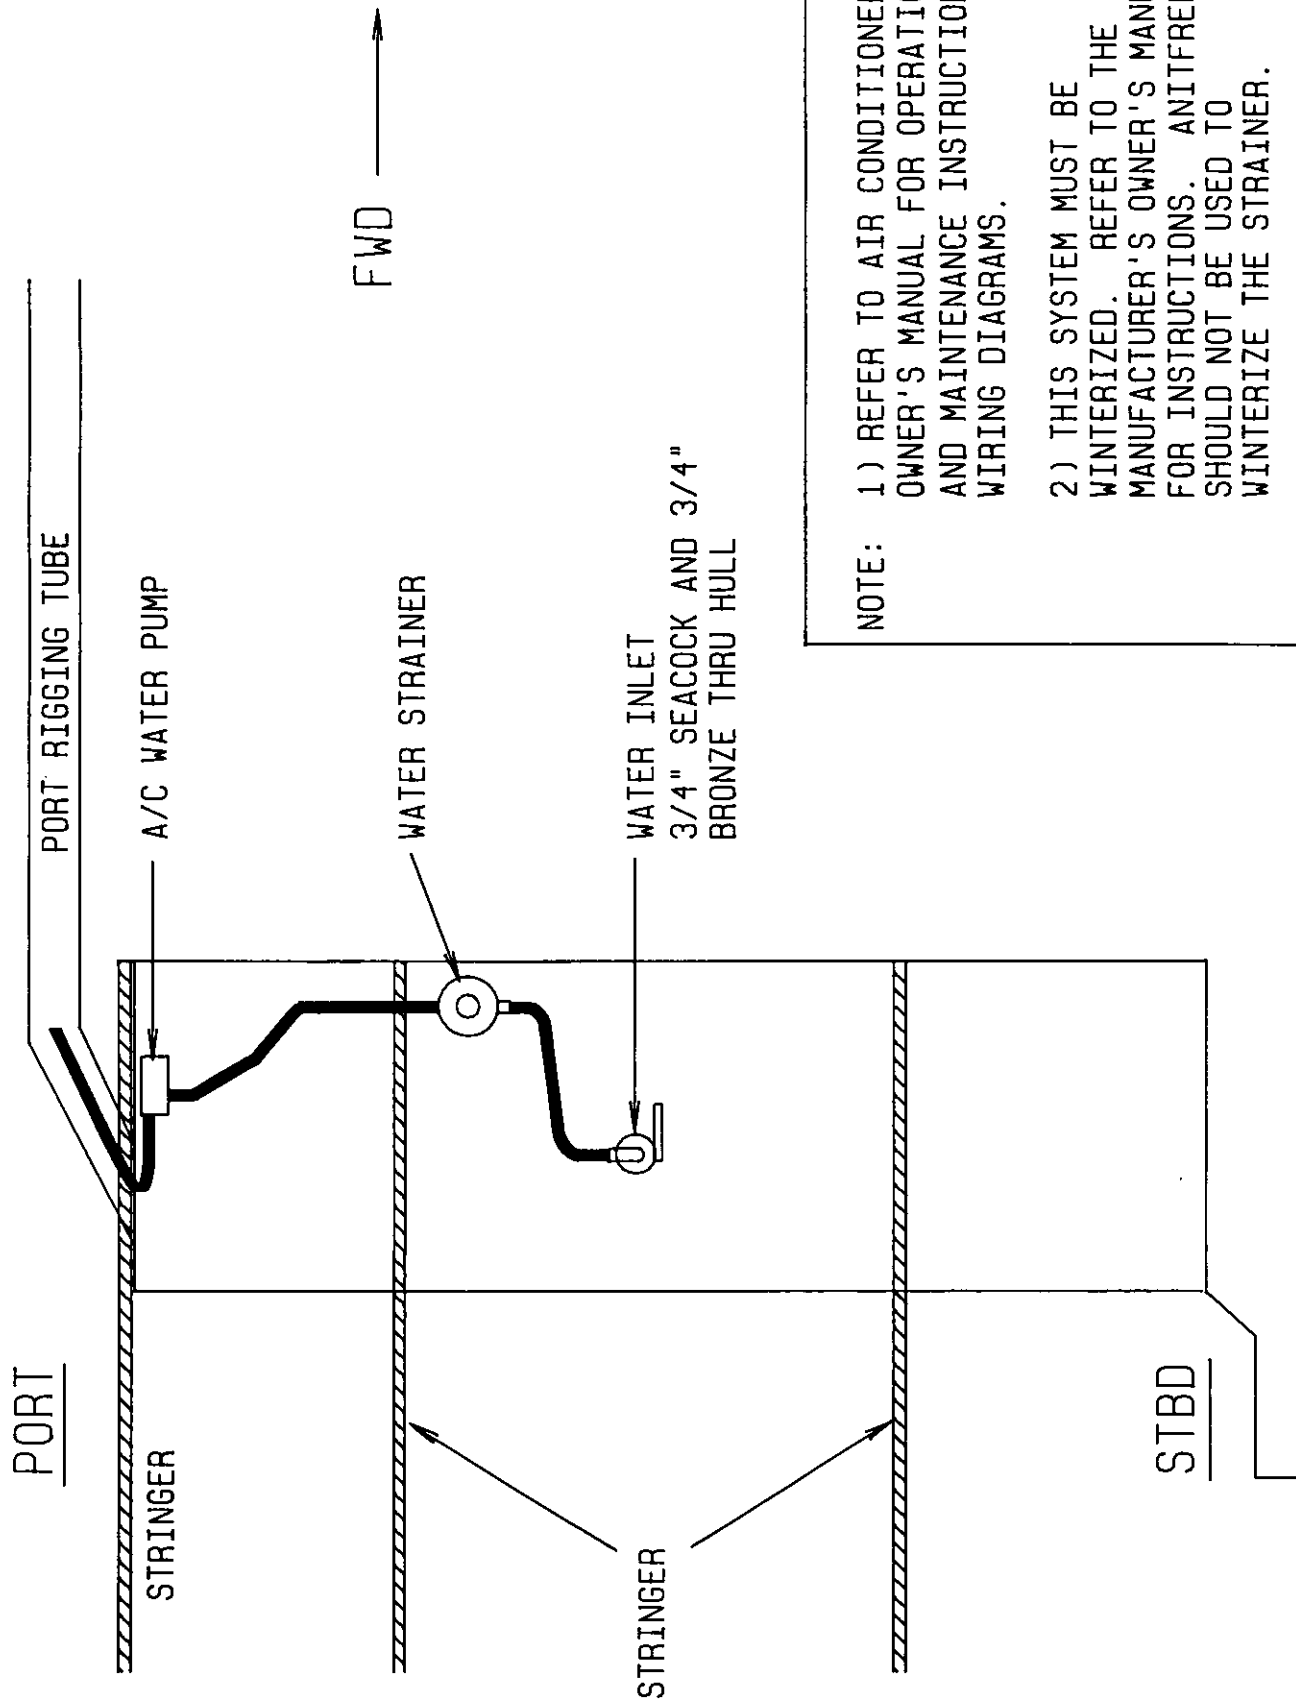


NOTE: 1) REFER TO AIR CONDITIONER OWNER'S MANUAL FOR OPERATION AND MAINTENANCE INSTRUCTIONS, WIRING DIAGRAMS.

2) THIS SYSTEM MUST BE WINTERIZED. REFER TO THE MANUFACTURER'S OWNER'S MANUAL FOR INSTRUCTIONS. ANITFREEZE SHOULD NOT BE USED TO WINTERIZE THE STRAINER.

300 AIR CONDITIONING ASSEMBLY

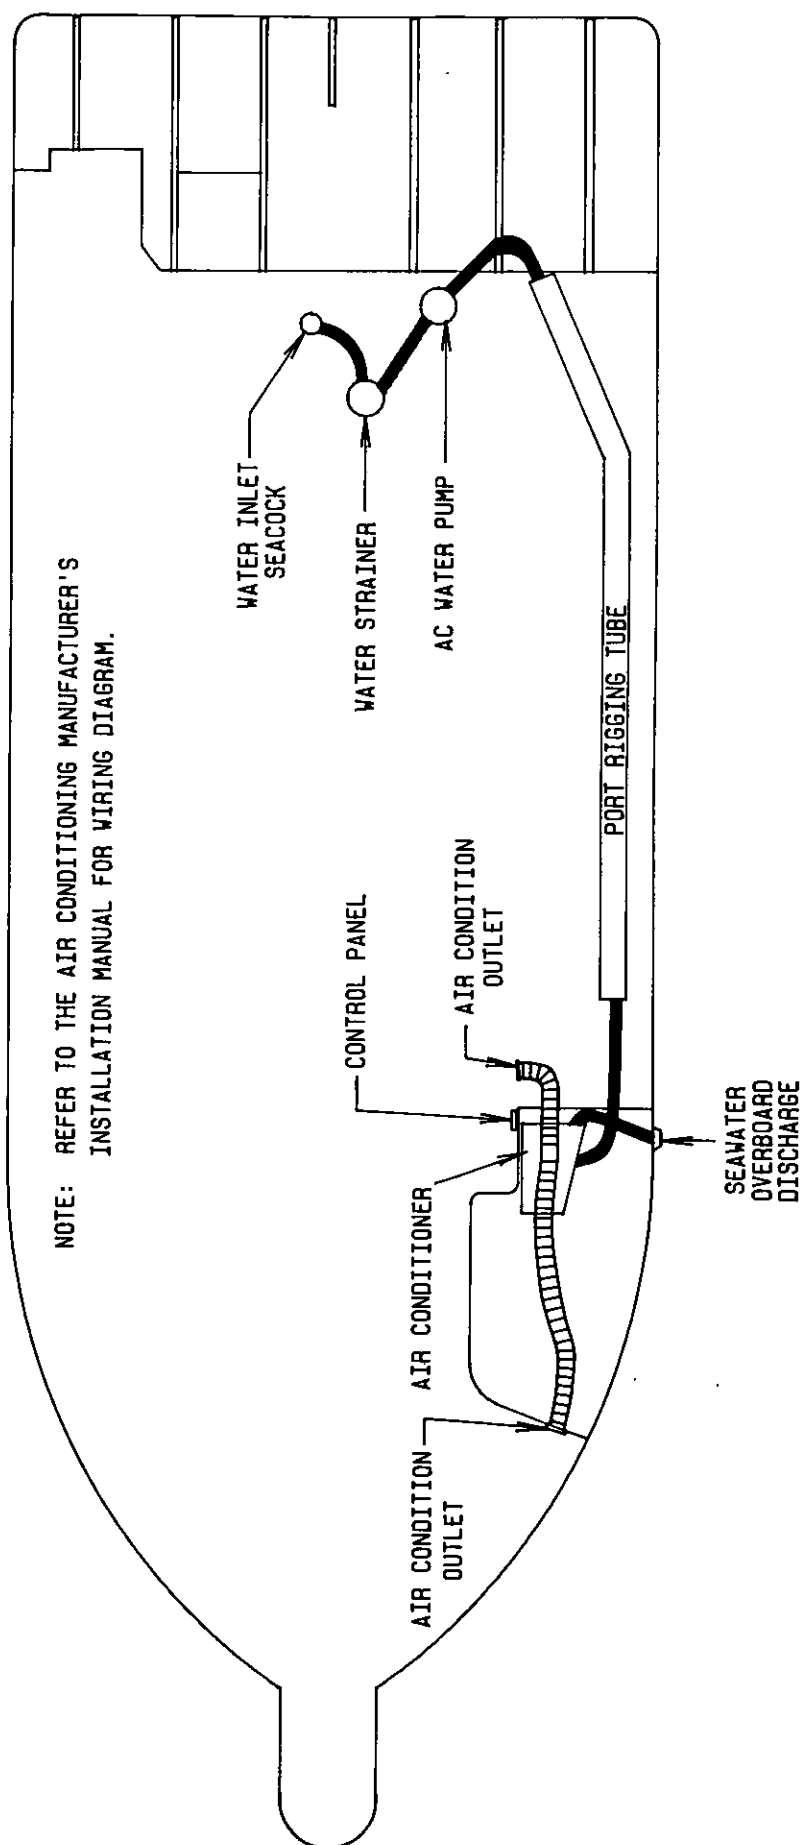


300 AIR CONDITIONING LAYOUT

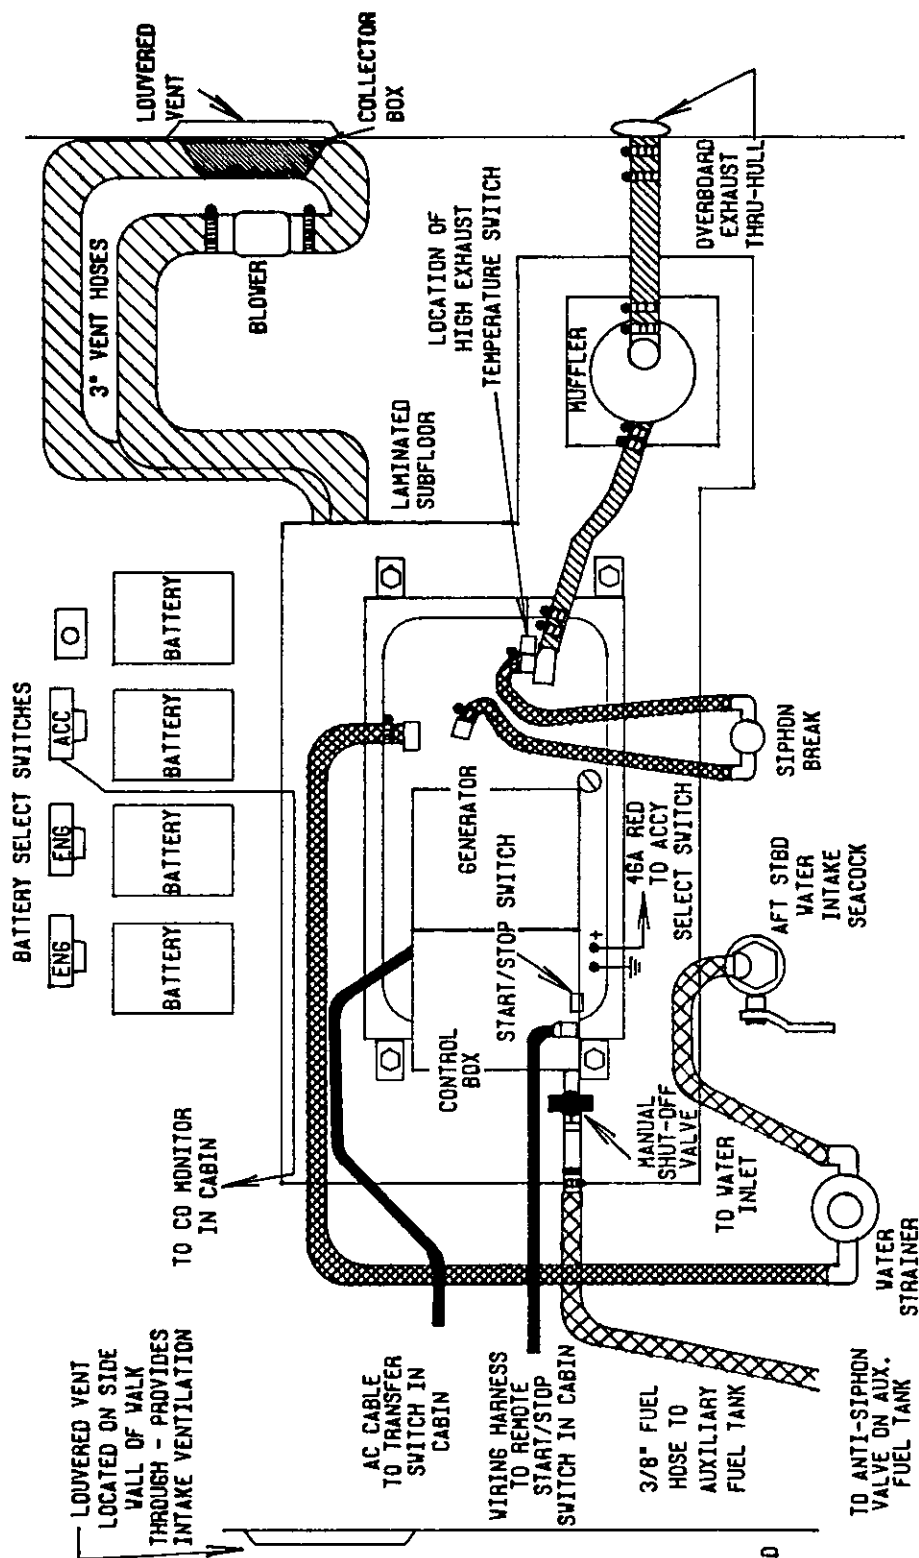


NOTE:


- 1) CAREFULLY READ GENERATOR OWNER'S MANUAL FOR OPERATION AND MAINTENANCE INSTRUCTIONS BEFORE USING.
- 2) ALWAYS VERIFY CO MONITOR IN CABIN IS OPERATING BEFORE USING GENERATOR.
- 3) REFER TO GENERATOR OWNER'S MANUAL FOR WINTERIZATION PROCEDURES.
- 4) WHEN WINTERIZING THE SYSTEM THE WATER STRAINER MUST BE DRAINED COMPLETELY TO PREVENT DAMAGE FROM FREEZING. IF ANTIFREEZE IS USED TO WINTERIZE THE GENERATOR, THE STRAINER SHOULD BE DRAINED COMPLETELY AND RINSED AFTER THE GENERATOR IS FULL OF ANTIFREEZE.

300 GENERATOR ASSEMBLY

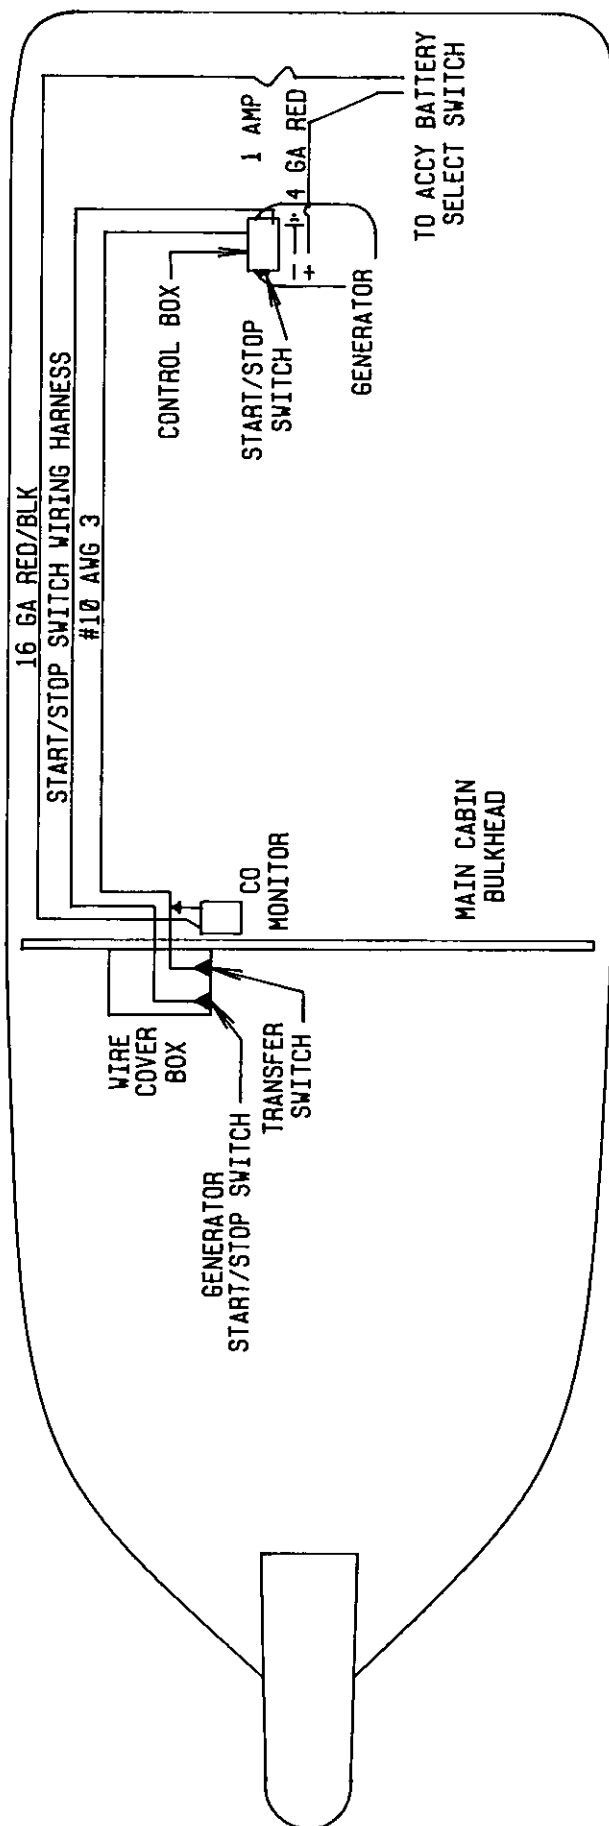



300 GENERATOR WIRING

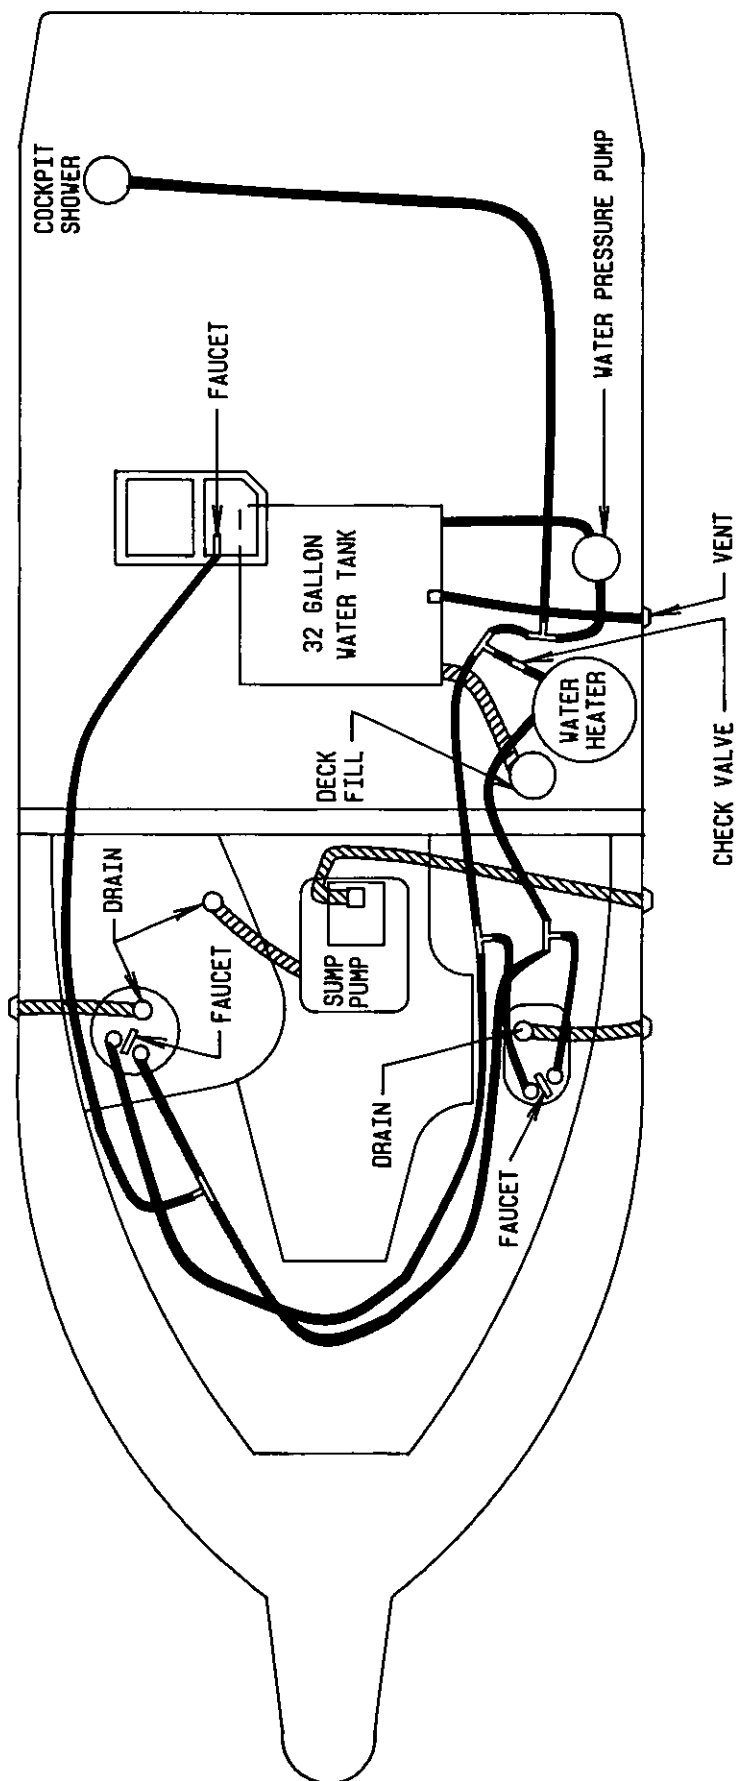**300 PRESSURIZED FRESH WATER SYSTEM**

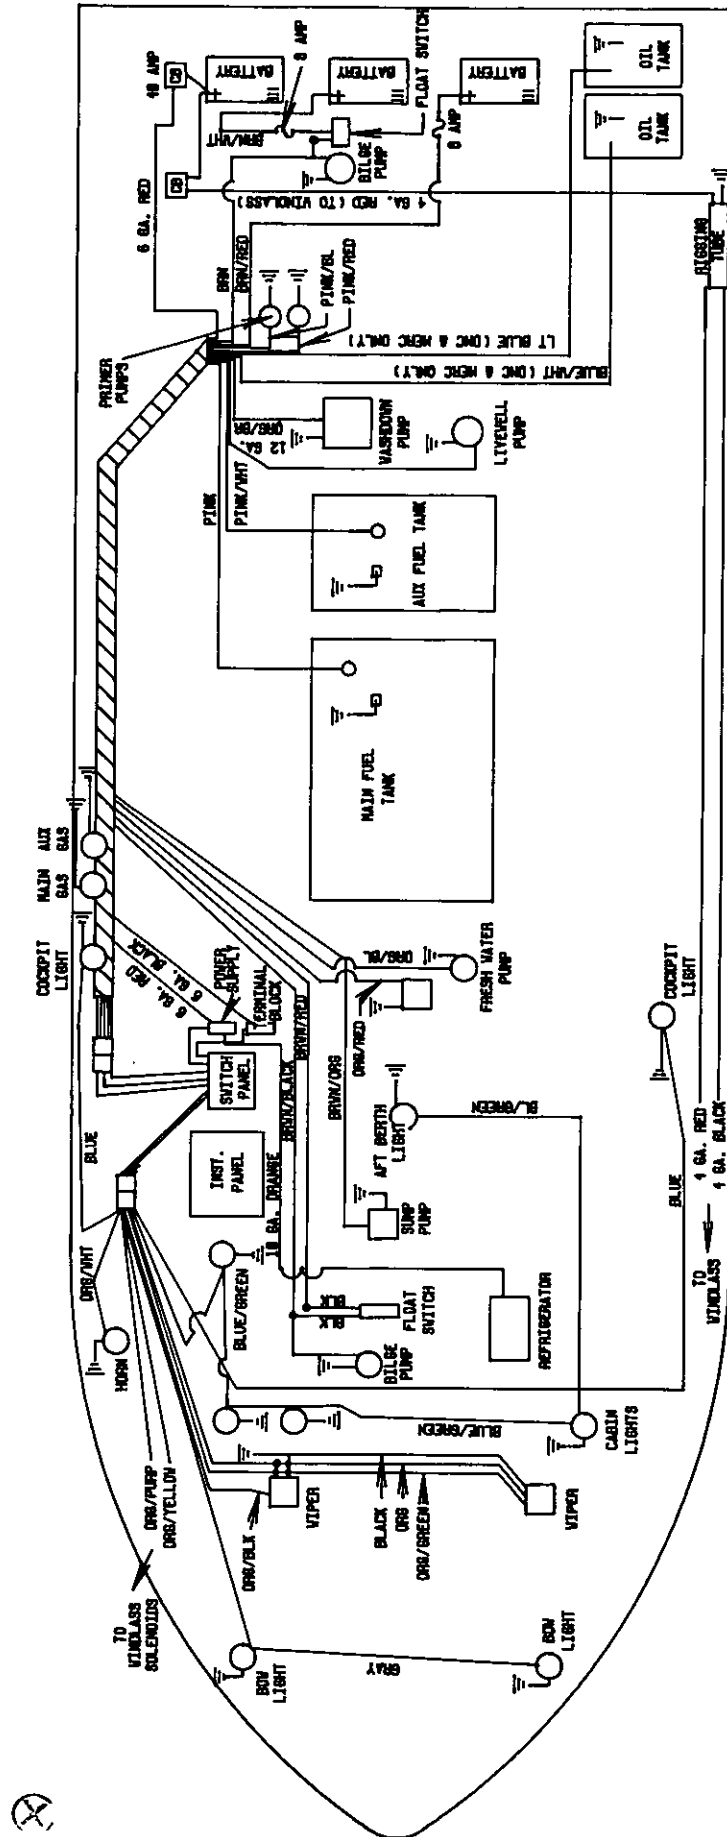

272 ACCESSORY WIRING DIAGRAM




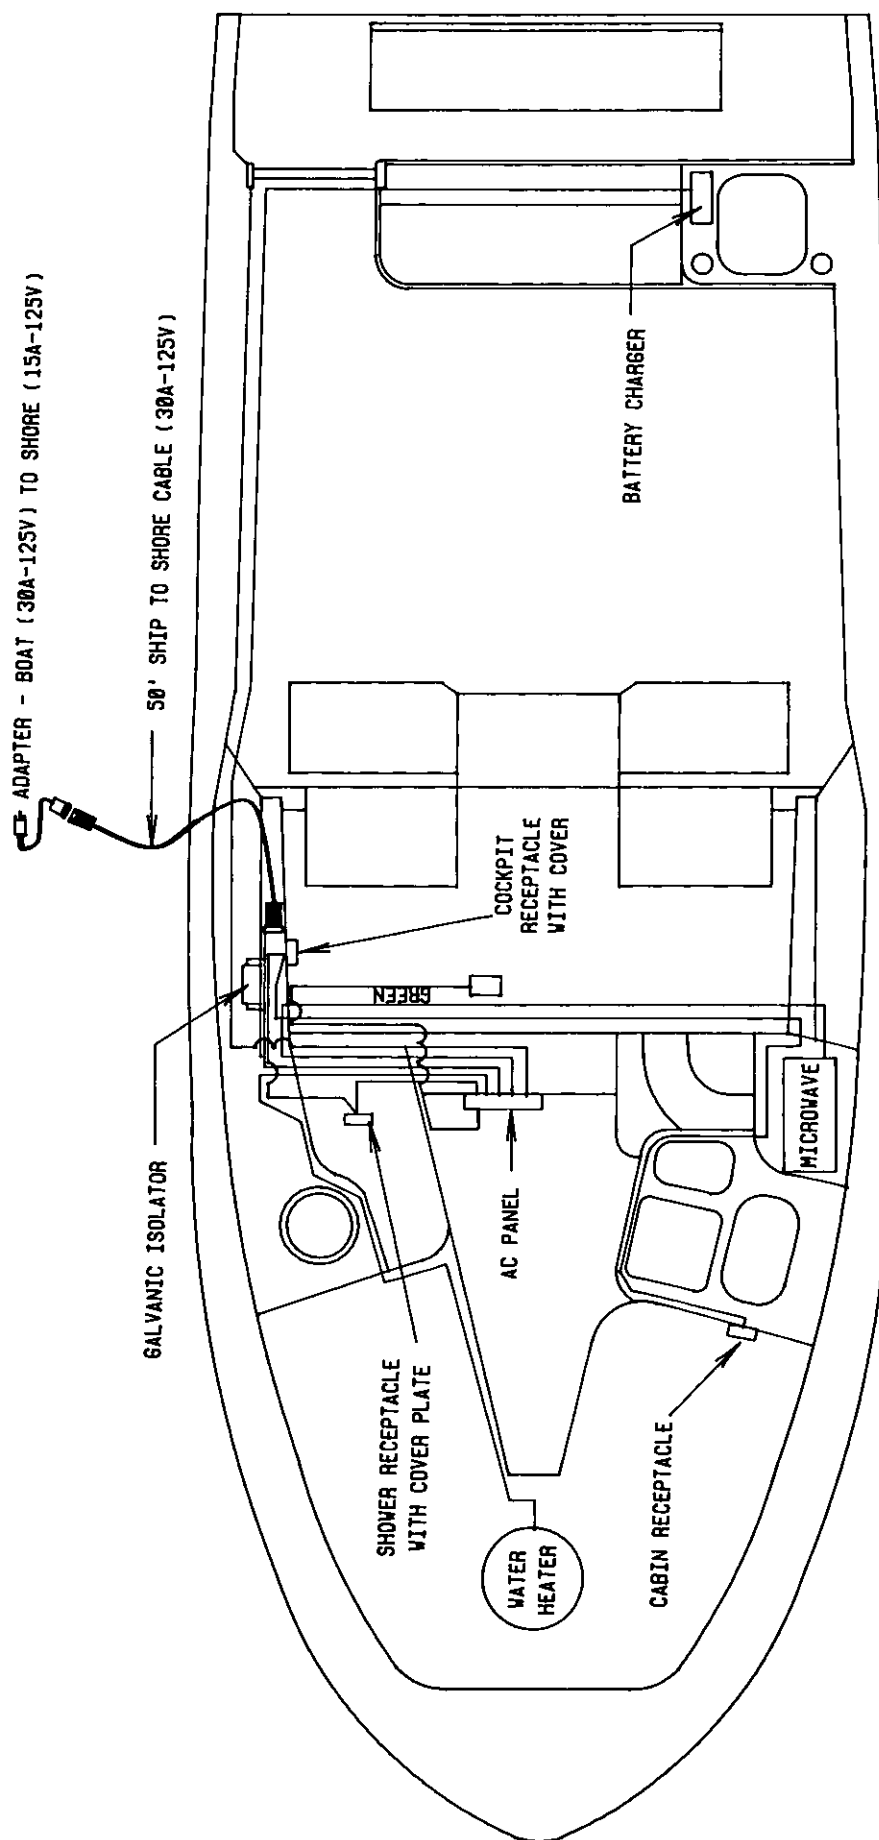
**272 DOCKSIDE POWER WIRING DIAGRAM**

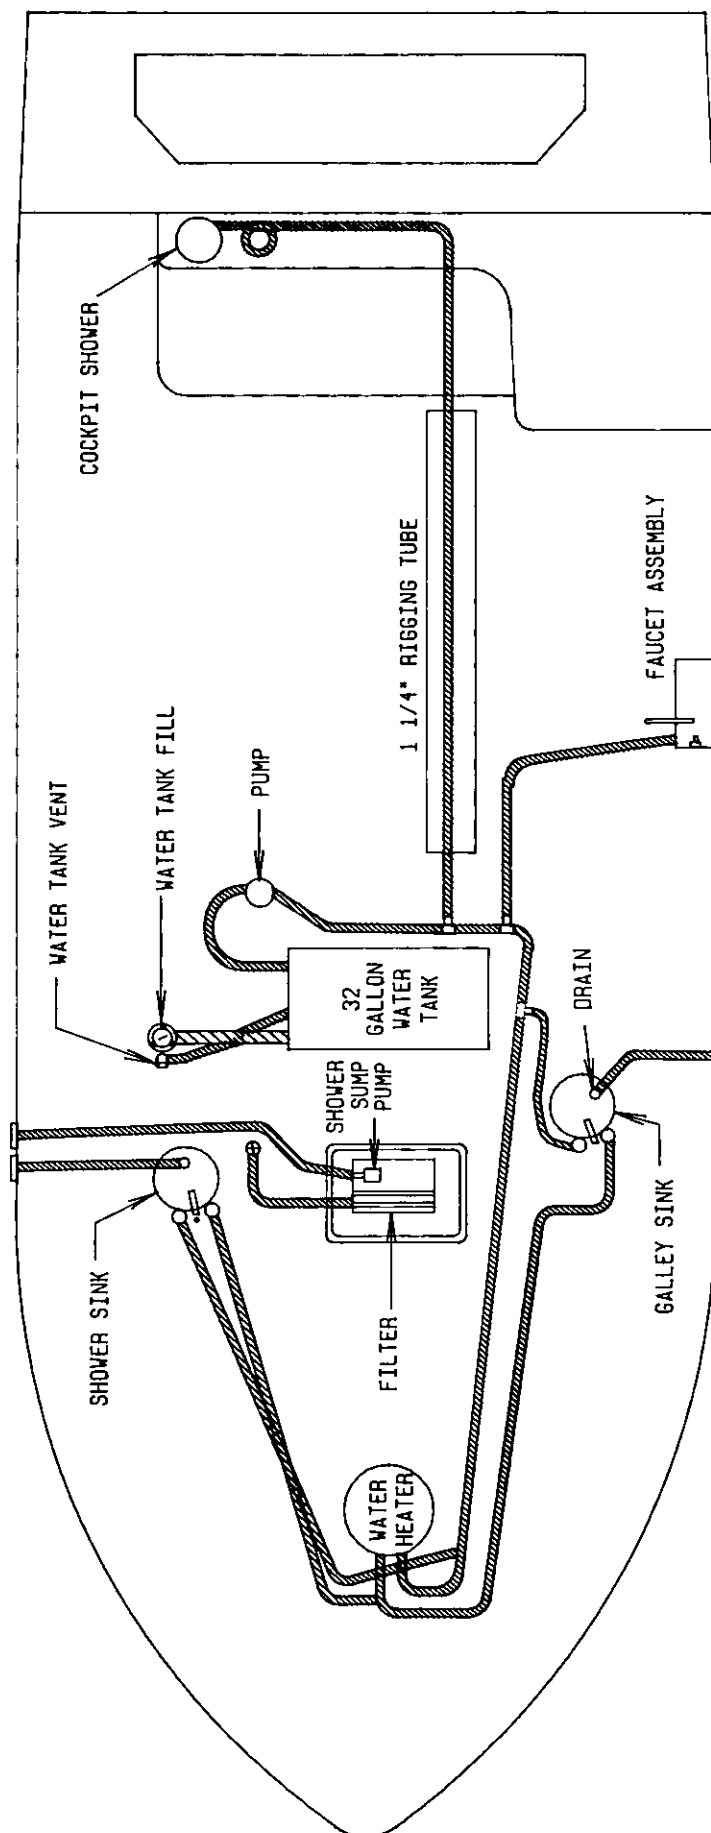
**272 PRESSURIZED SHOWER/HOT WATER SYSTEM**




- 1) TURN OFF THE BOAT'S SHORE CONNECTION SWITCH BEFORE CONNECTING OR DISCONNECTING SHORE CABLE.
- 2) CONNECT SHORE-POWER CABLE AT BOAT FIRST.
- 3) DISCONNECT SHORE-POWER CABLE AT SHORE OUTLET FIRST.
- 4) CLOSE SHORE-POWER INLET COVER TIGHTLY.
- 5) DO NOT ALTER SHORE-POWER CABLE CONNECTORS

268 TWIN AND 272 BATTERY SELECT WIRING DIAGRAM

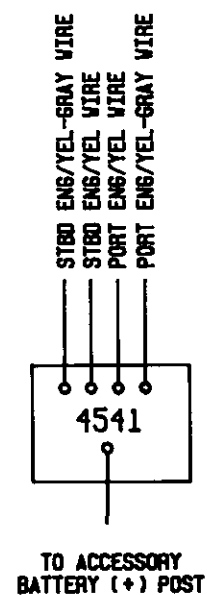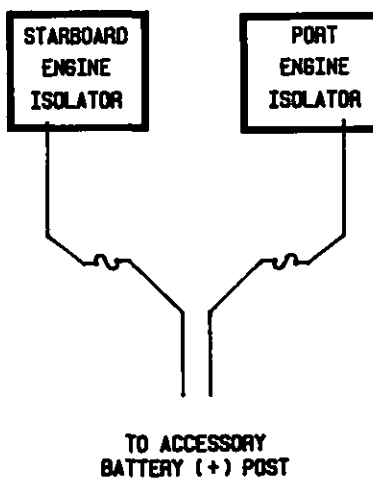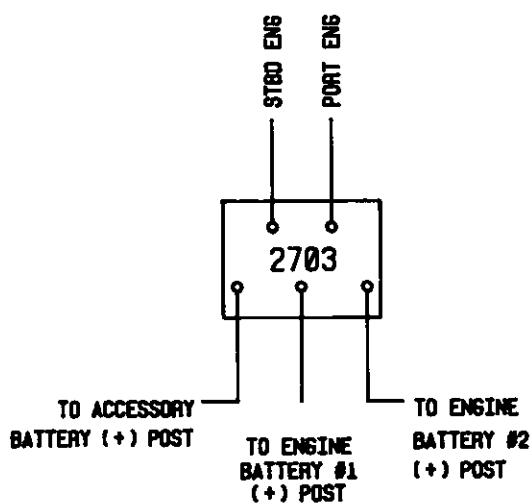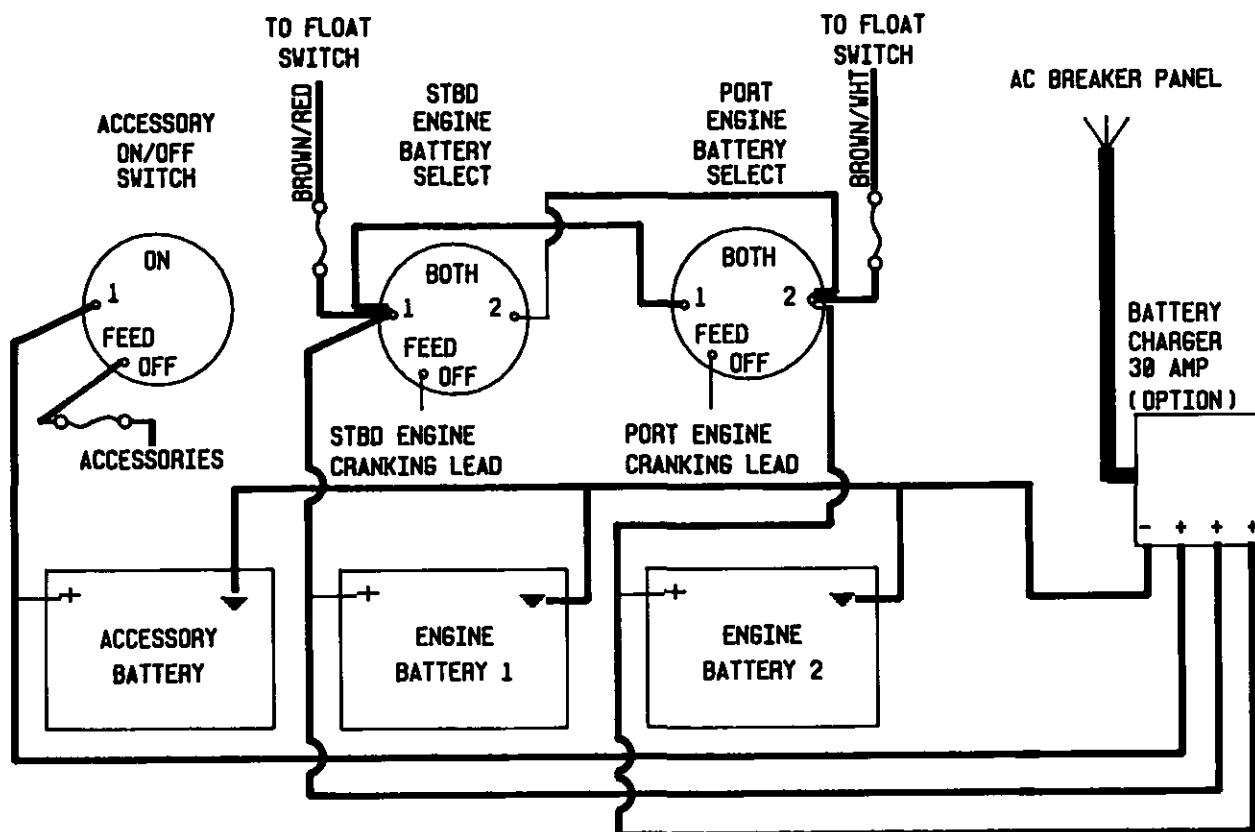

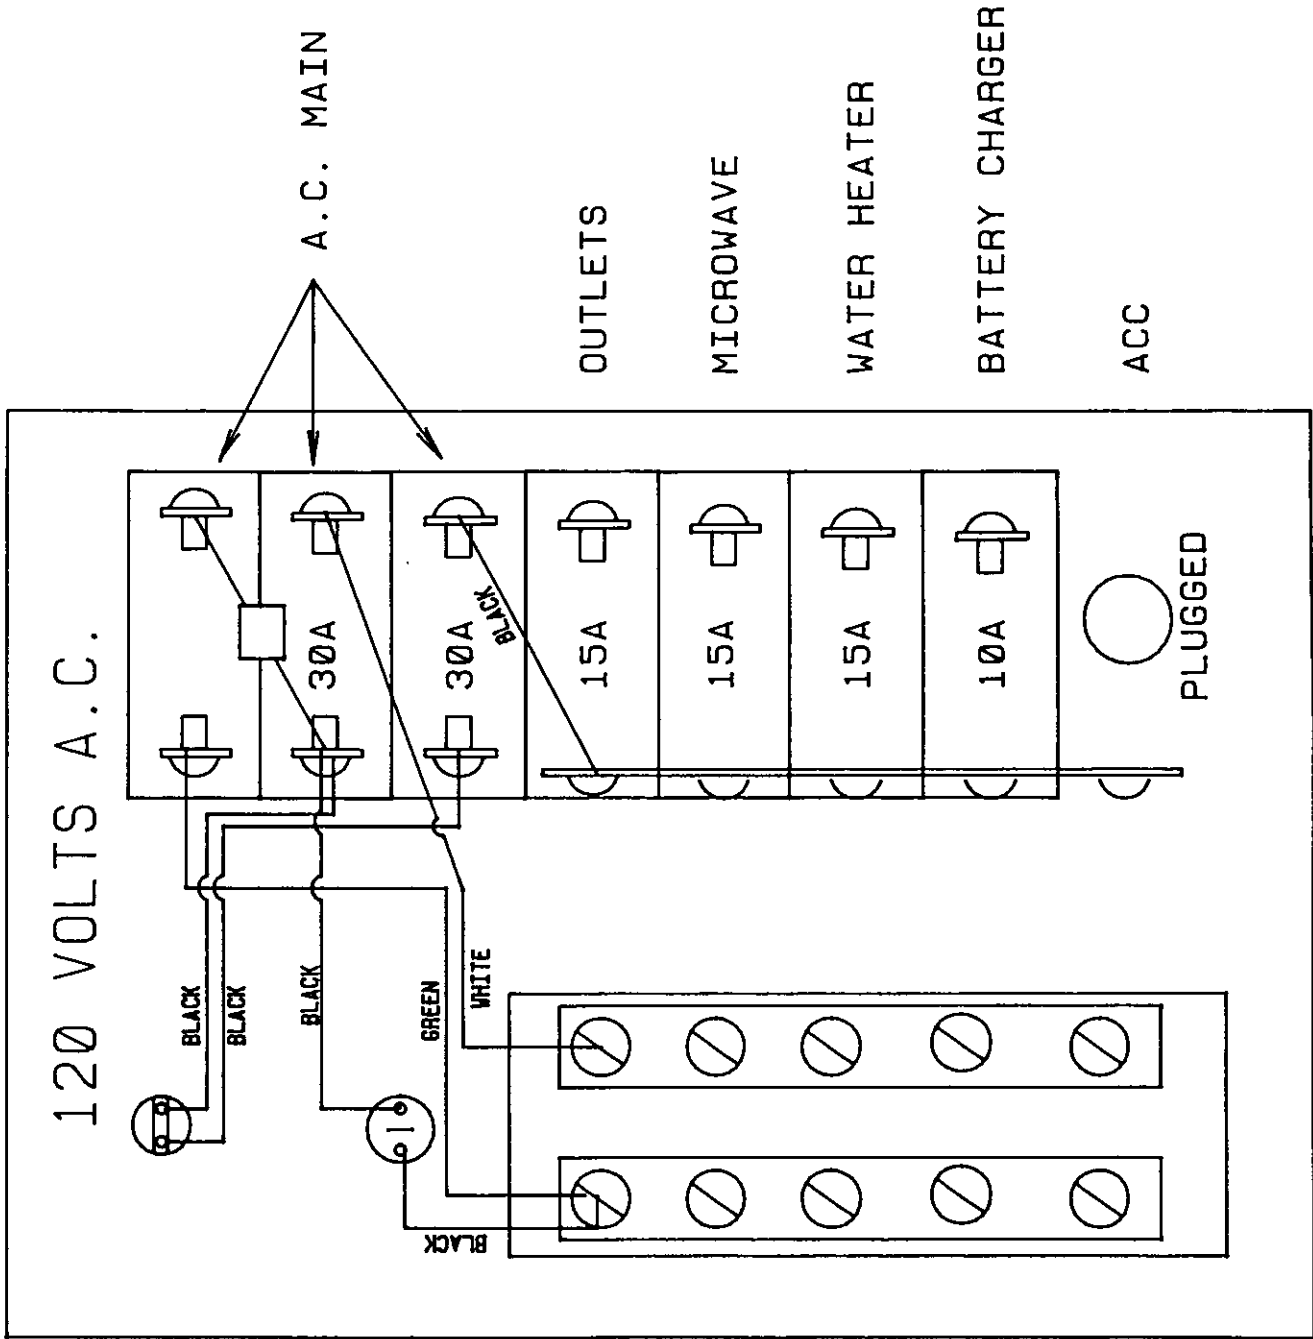


268 AND 272 AC PANEL WIRING DIAGRAM

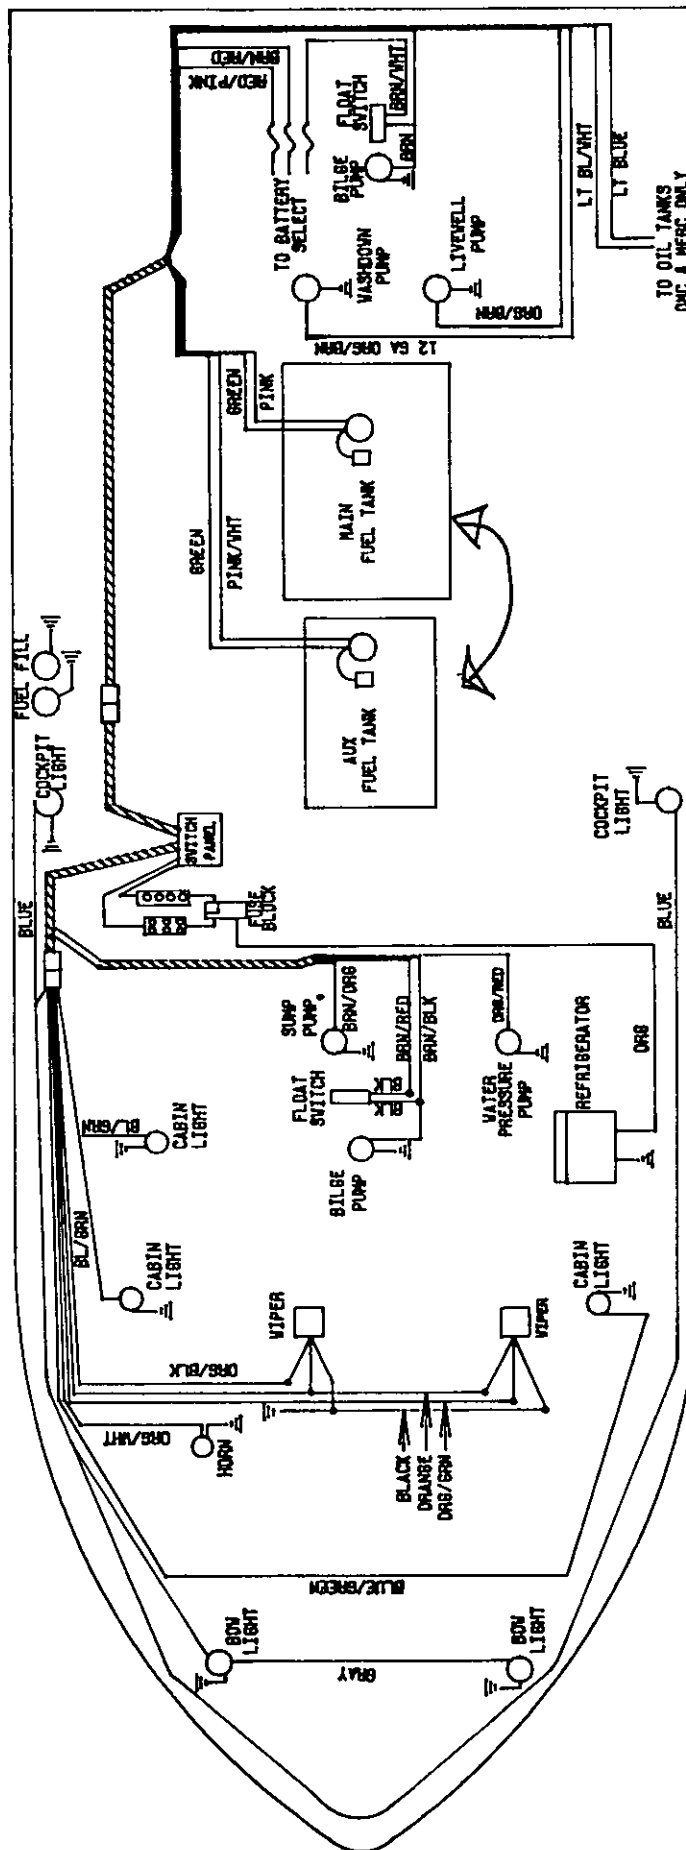


268 ACCESSORY WIRING DIAGRAM


⊗

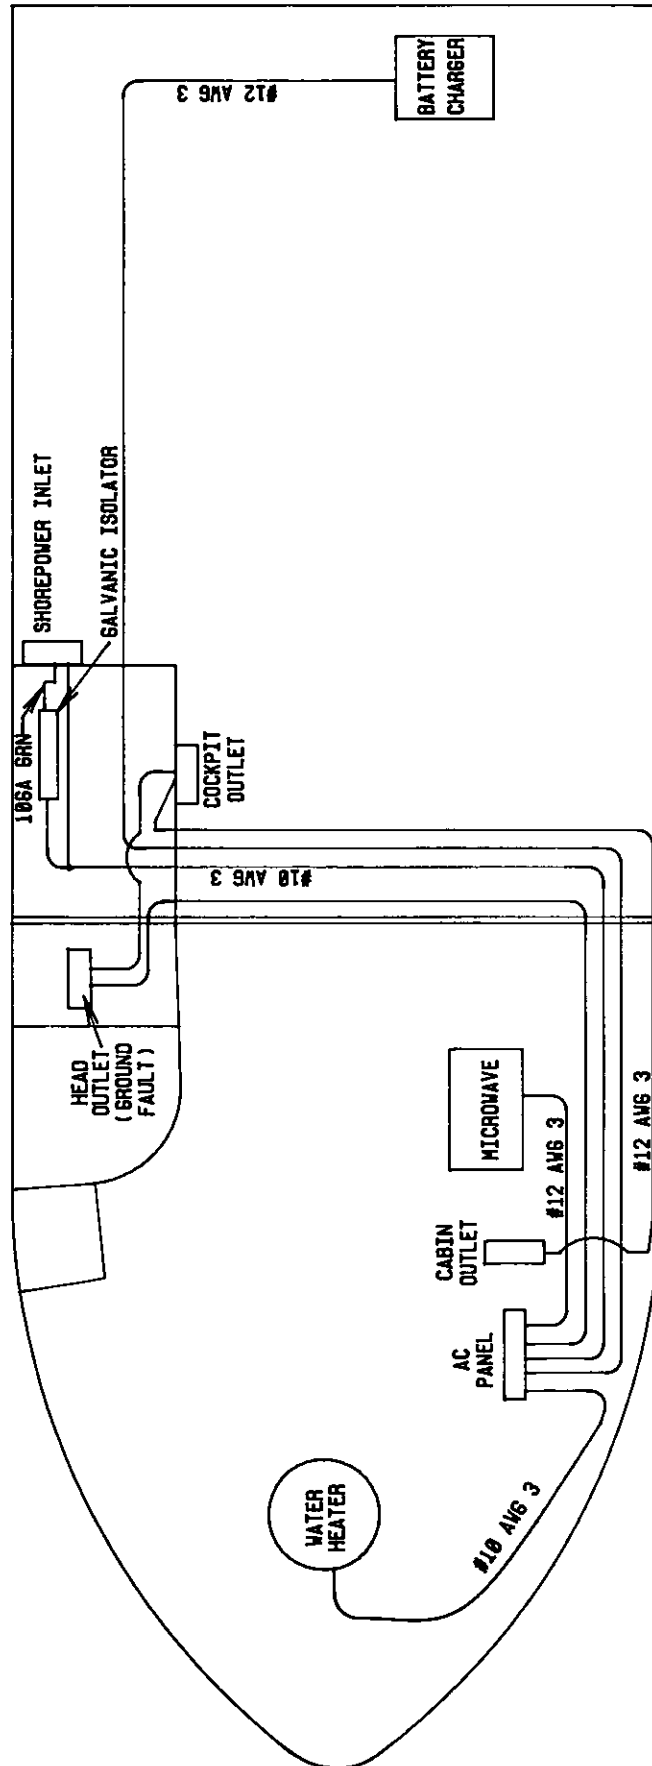


268 DOCKSIDE POWER WIRING DIAGRAM

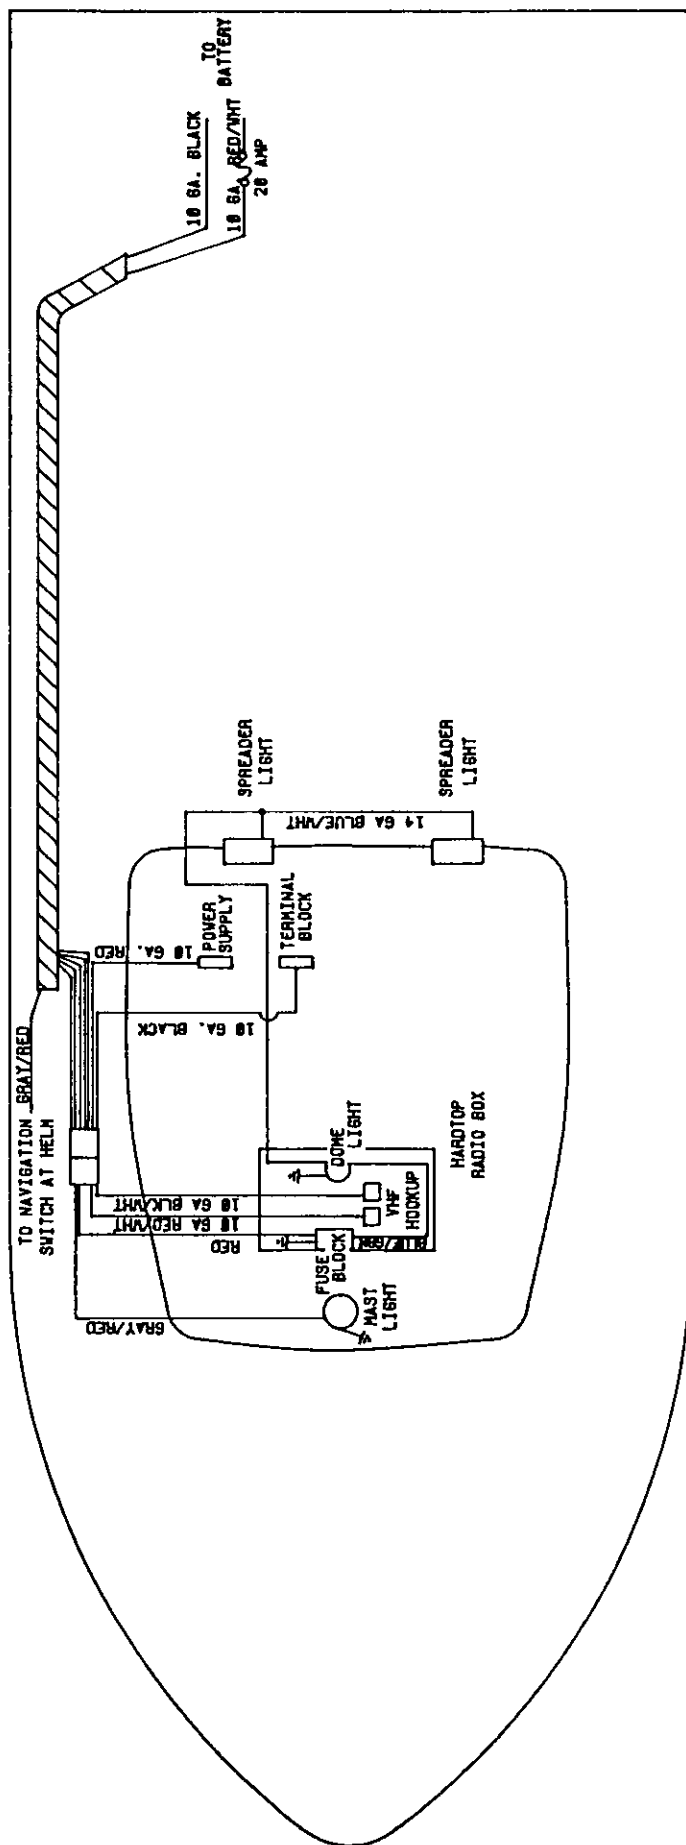

268 HARDTOP WIRING DIAGRAM

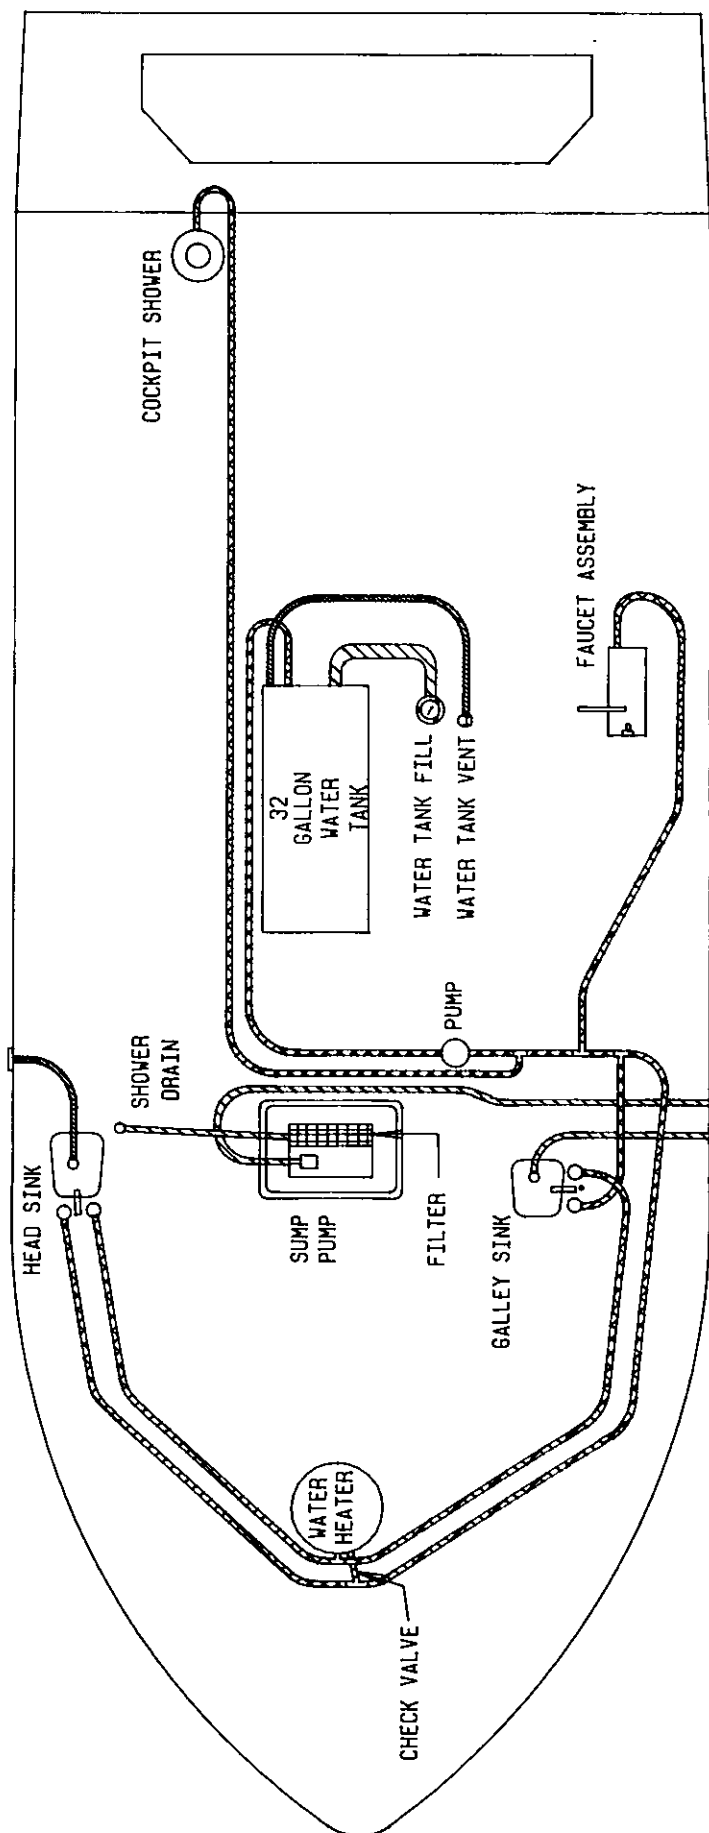
**268 PRESSURIZED SHOWER/HOT WATER SYSTEM**

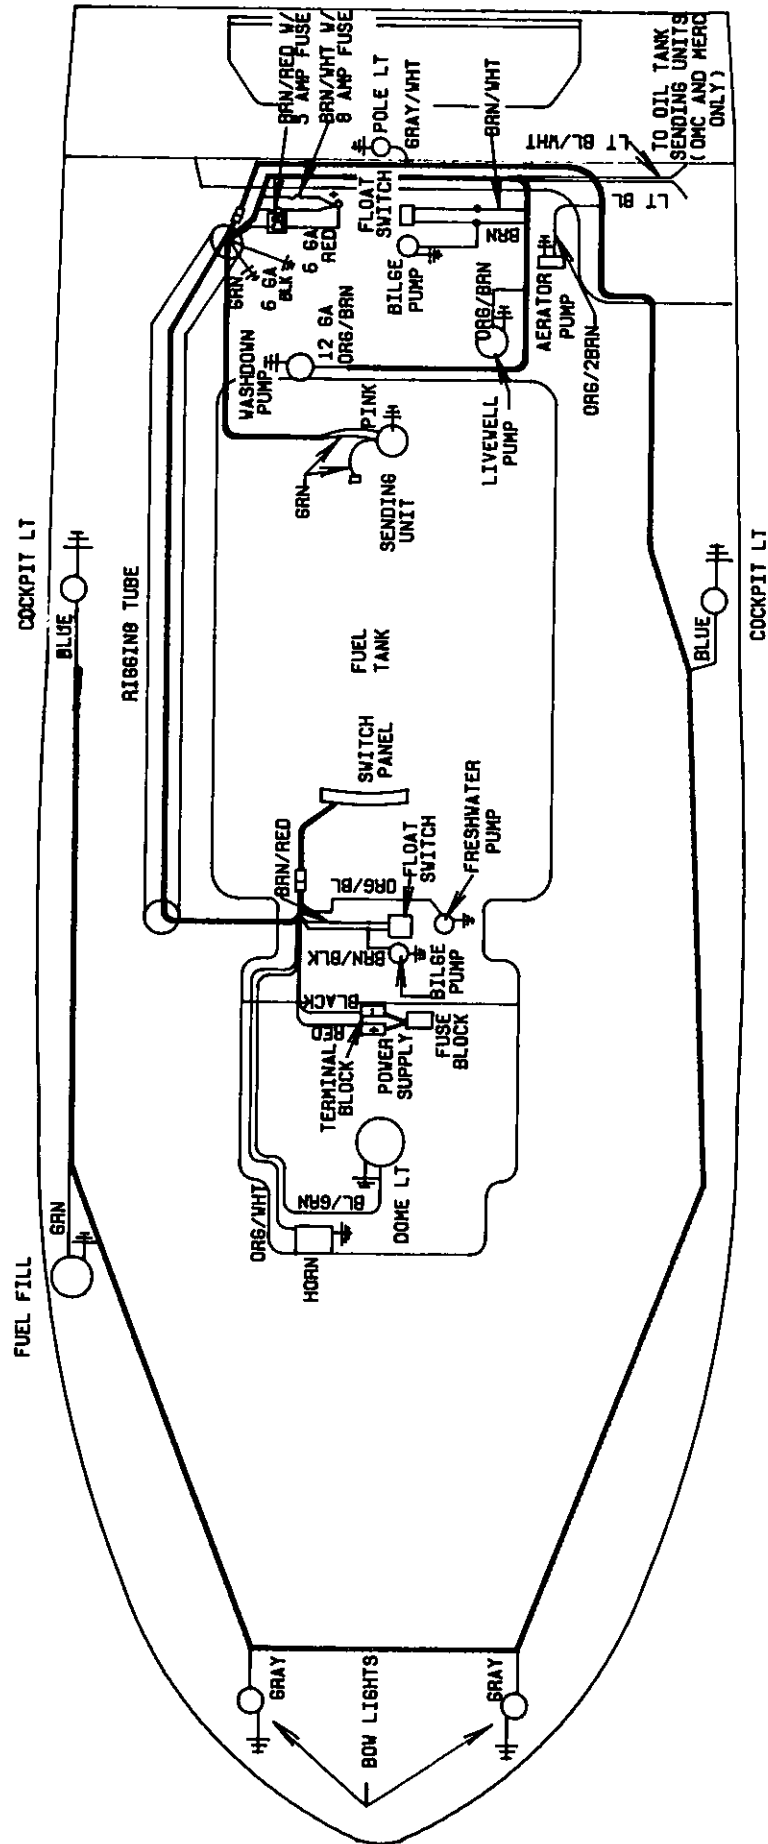


263 ACCESSORY WIRING DIAGRAM


263 PORTABLE HEAD W/ INLINE MACERATOR


SK26-027
3/95

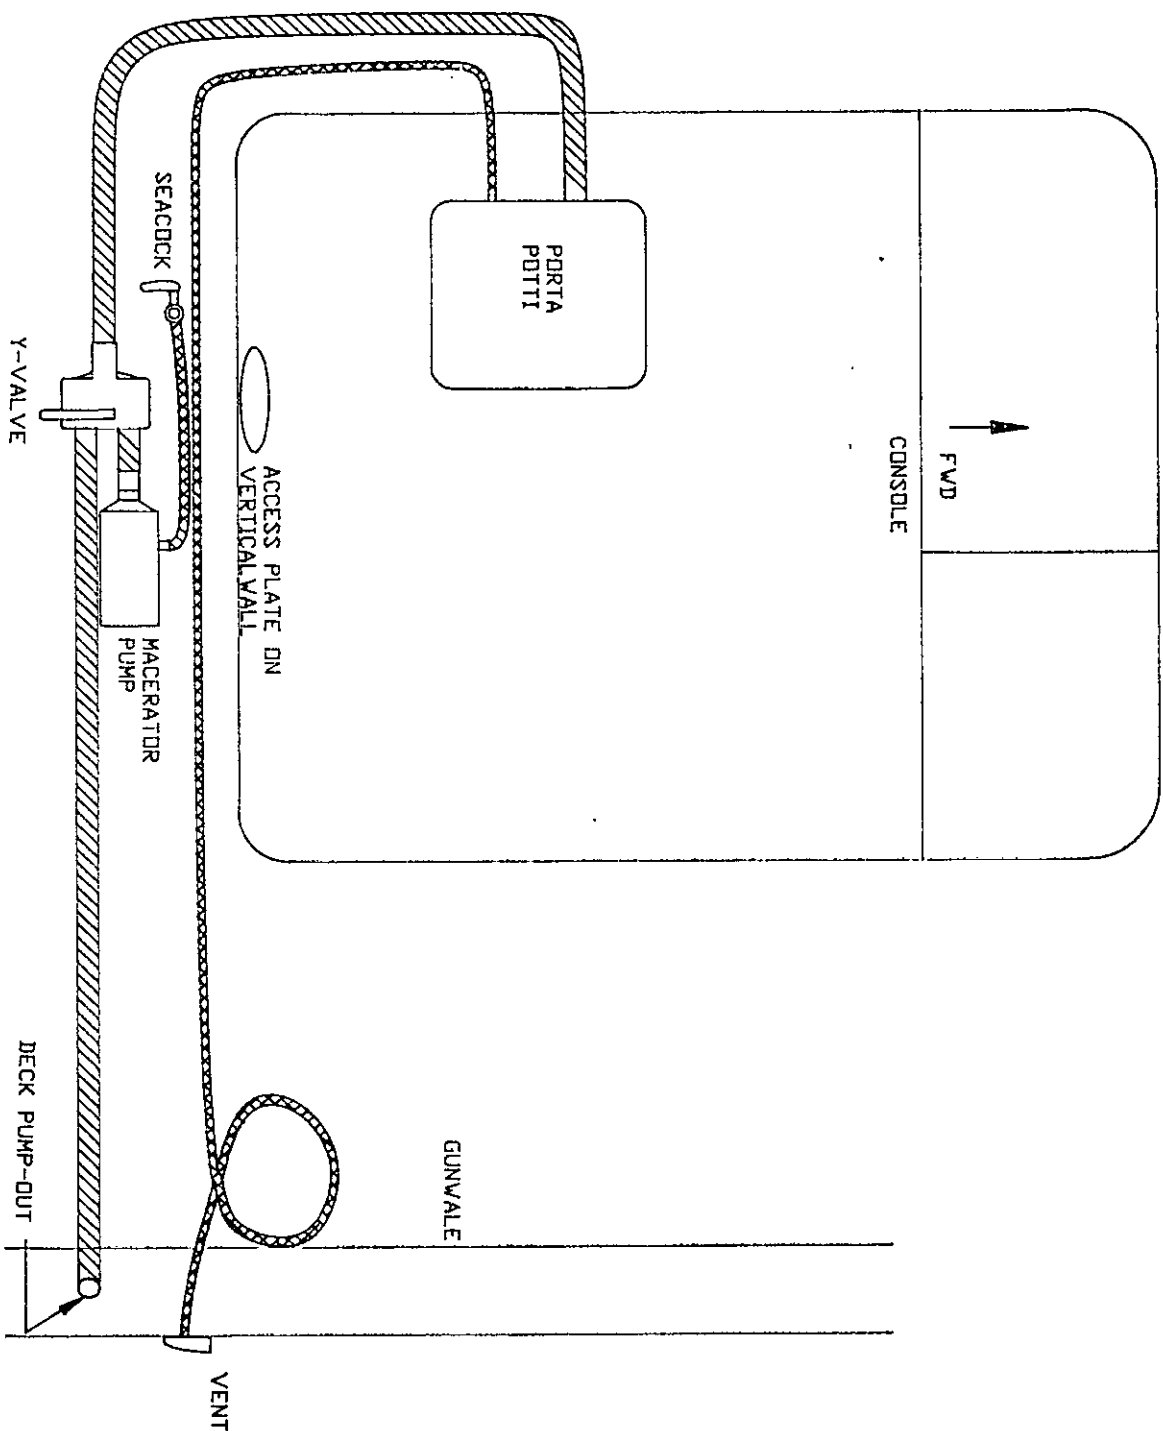

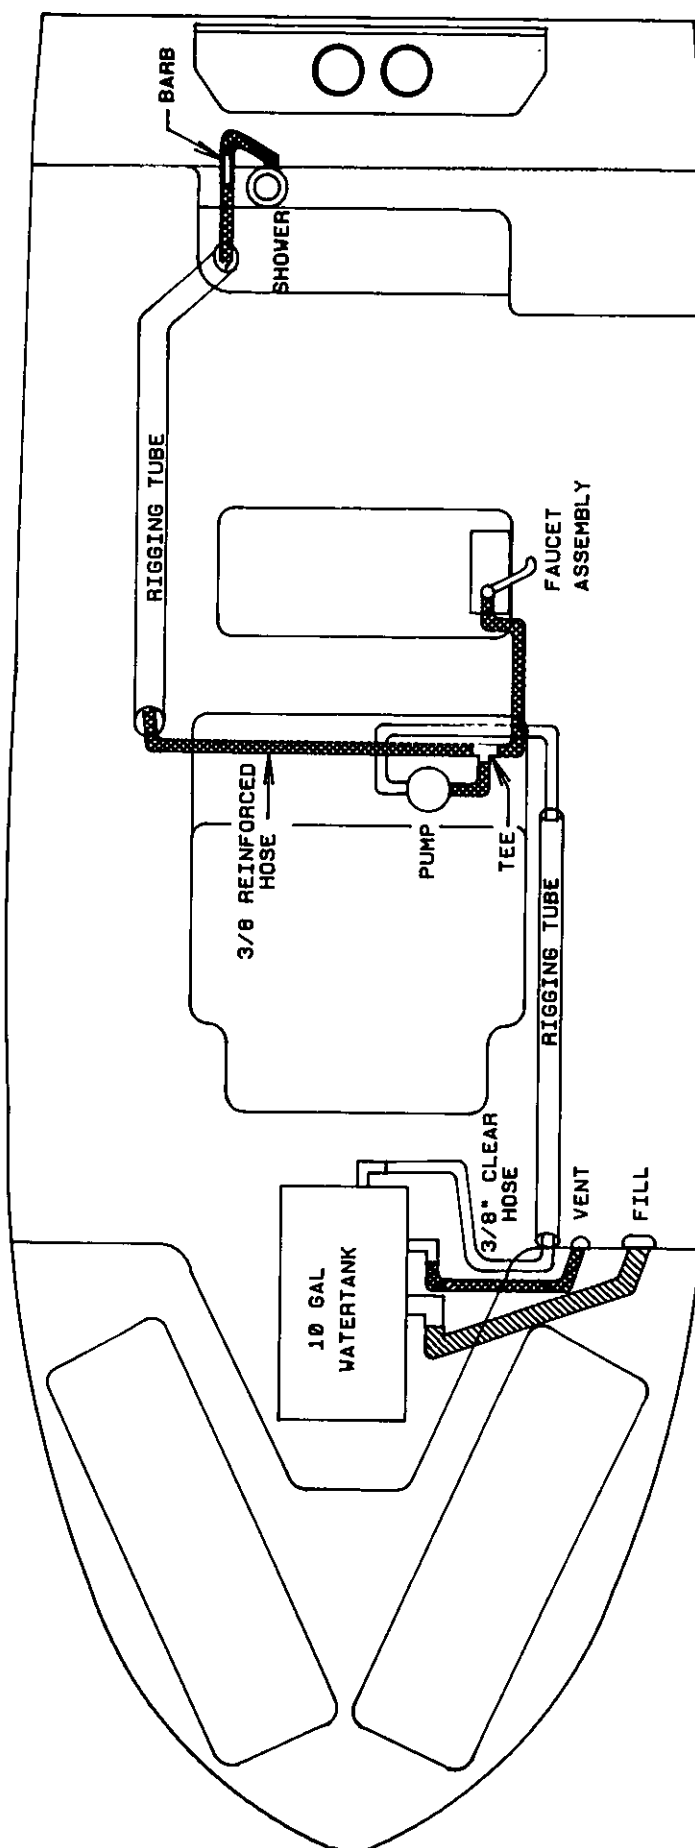**263 FRESHWATER SYSTEM**

263 LIVEWELL SYSTEM

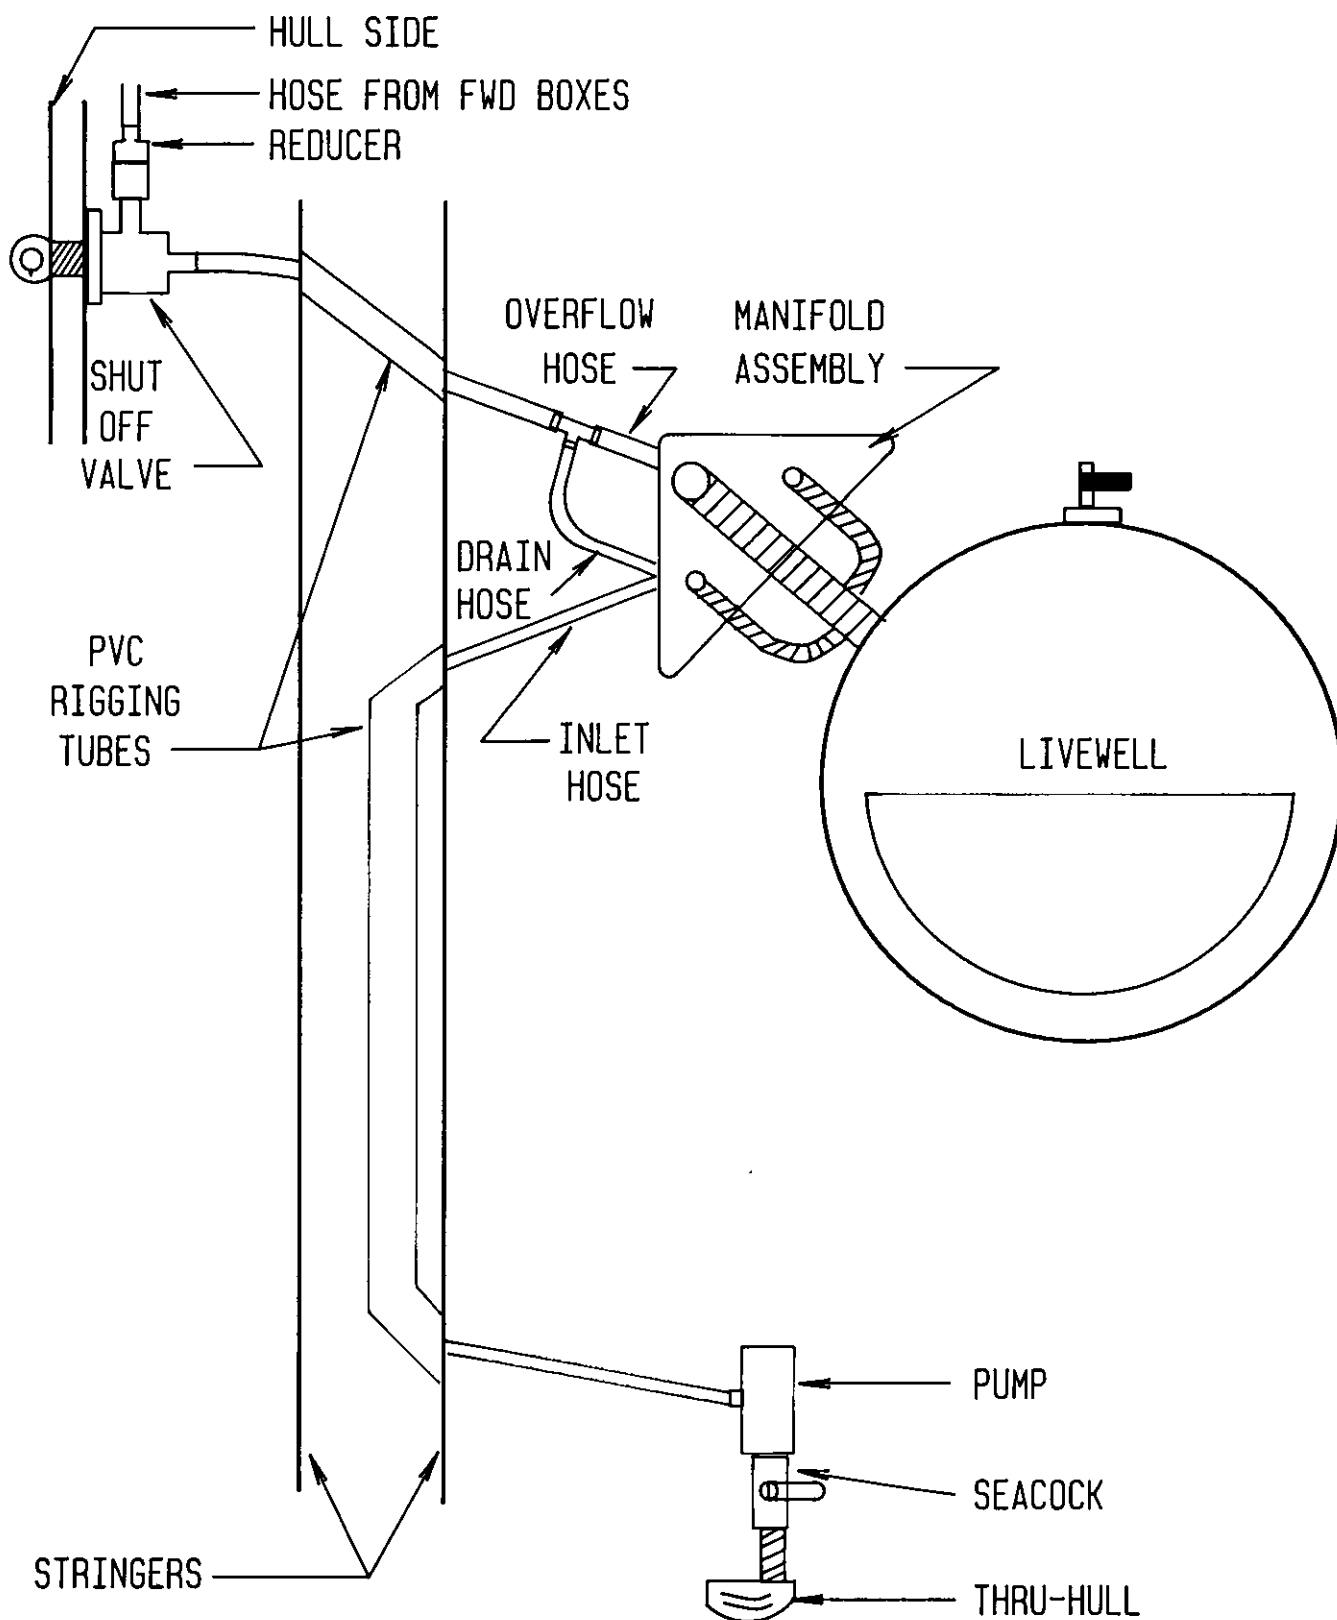

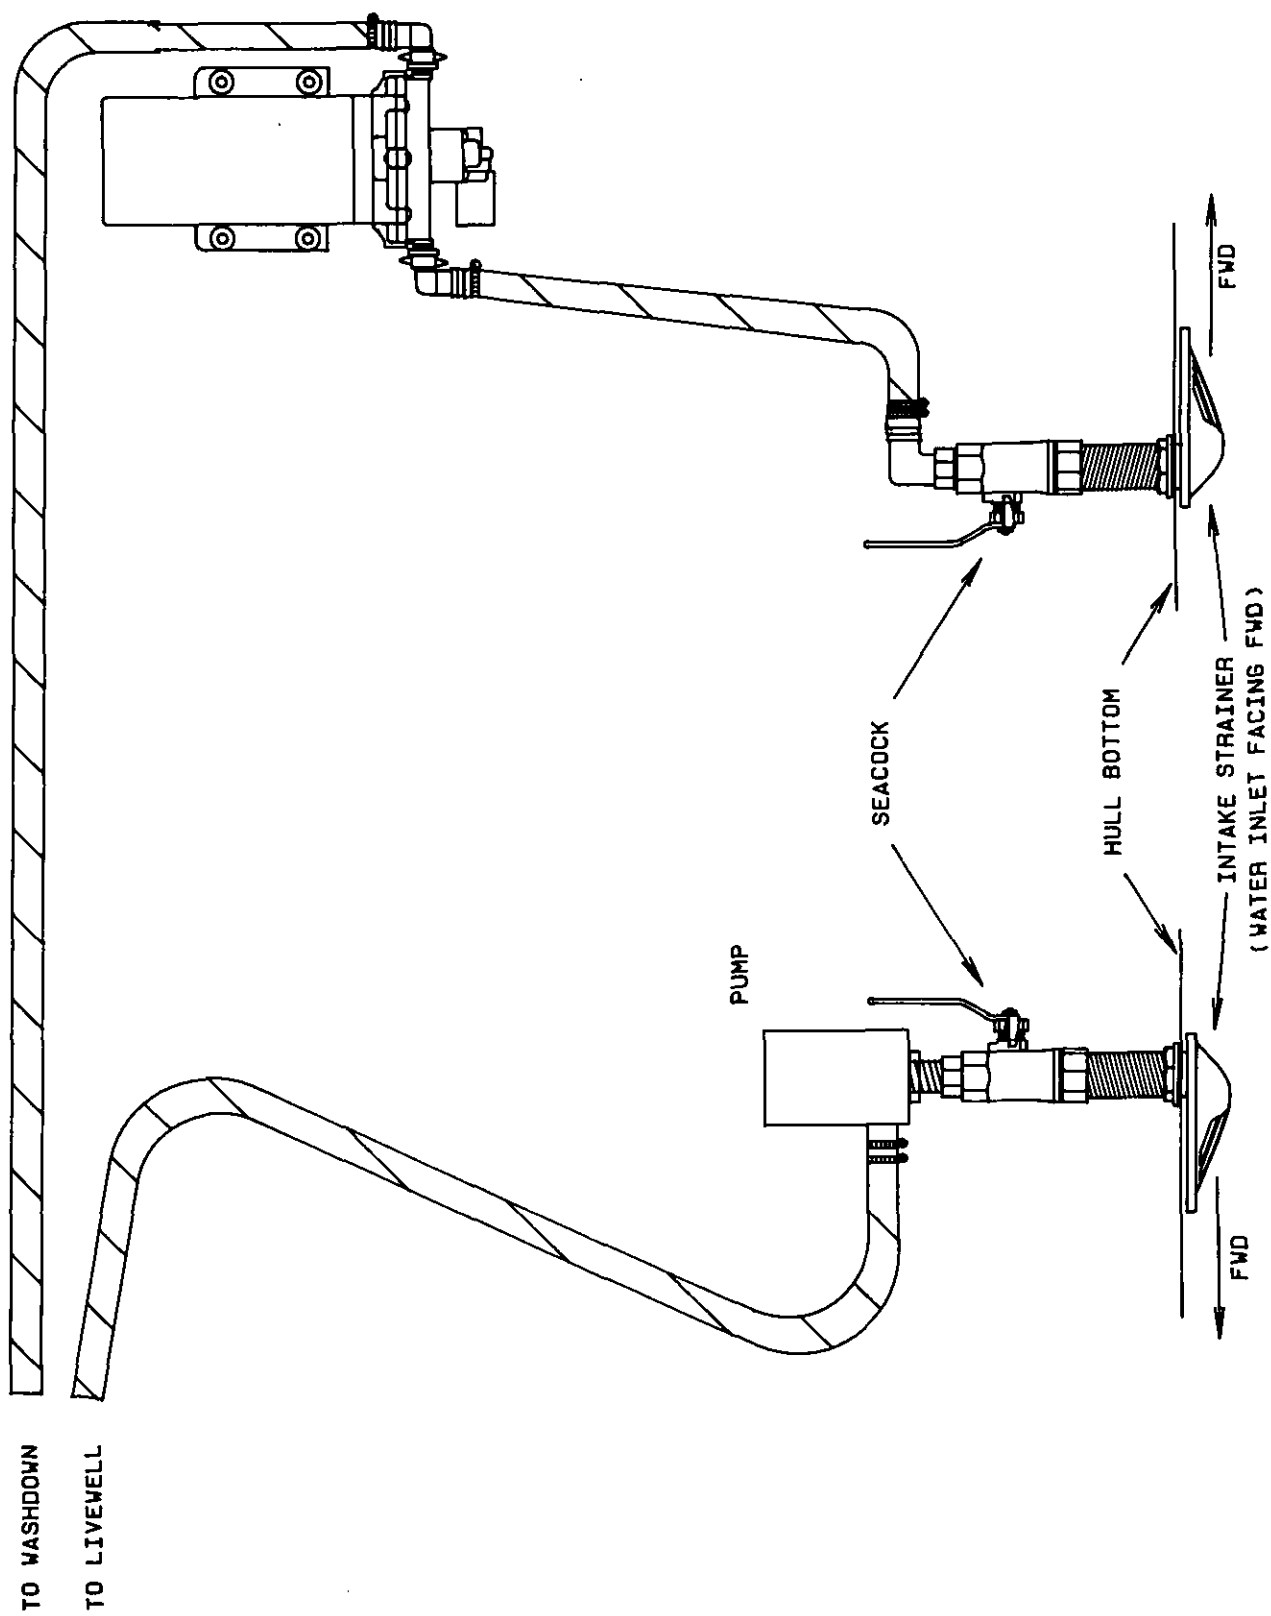
**LIVEWELL/WASHDOWN SYSTEM**

Grady-White Construction
Most Grady-Whites are built in three separate fiberglass pieces, the hull, the deck and the fiberglass liner as shown below. These three pieces are bonded together after installation of standard through-bolted hardware, electrical systems, gas tanks and foam floatation.

The deck
All standard hardware is mounted and secured with through bolts and locking nuts before being installed in the boat. The deck is then placed on the hull/liner and secured all around.


The fiberglass liner
The fiberglass liner of your Grady-White is removed from its mold then all fishboxes and ice boxes are insulated with foam. The liner is then placed in the hull, the deck placed over both, and all three are bonded then secured with stainless steel screws all around.

The hull
The wooden stringer system in your Grady-White is encapsulated in resin and fiberglass then fiberglassed into place while the hull is still in its mold. This gives your hull permanent strength and shape. Foam floatation is sprayed into strategic cavities between the stringers to add floatation, strength and sound absorption.

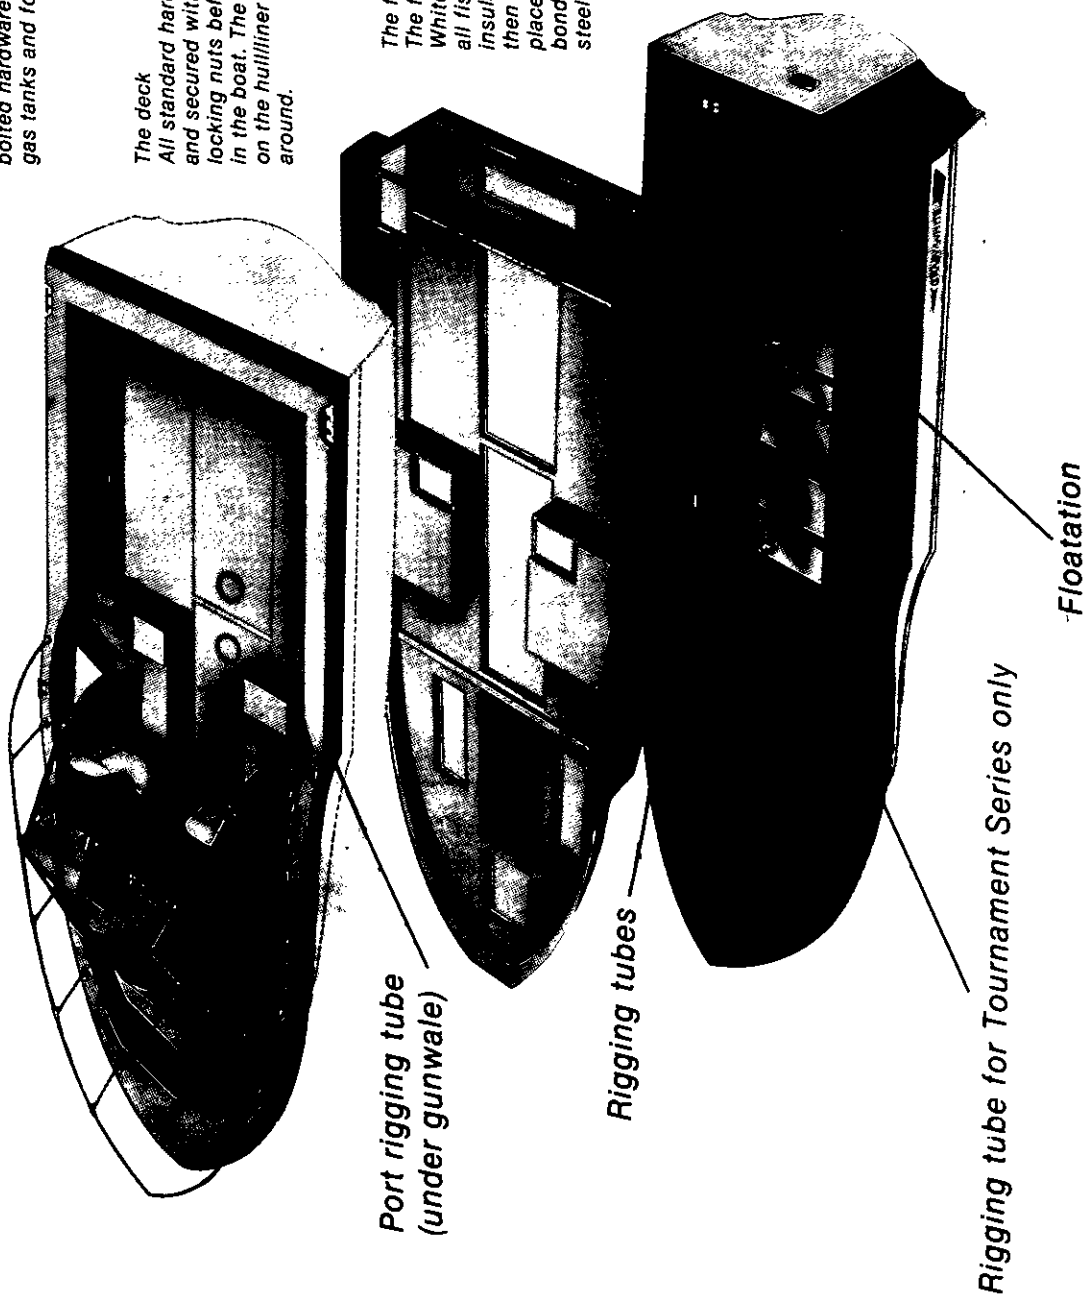


HULL/LINER/DECK LAYOUT

SHORE SUPPLY AC



2507

COMMONLY USED NAUTICAL TERMS

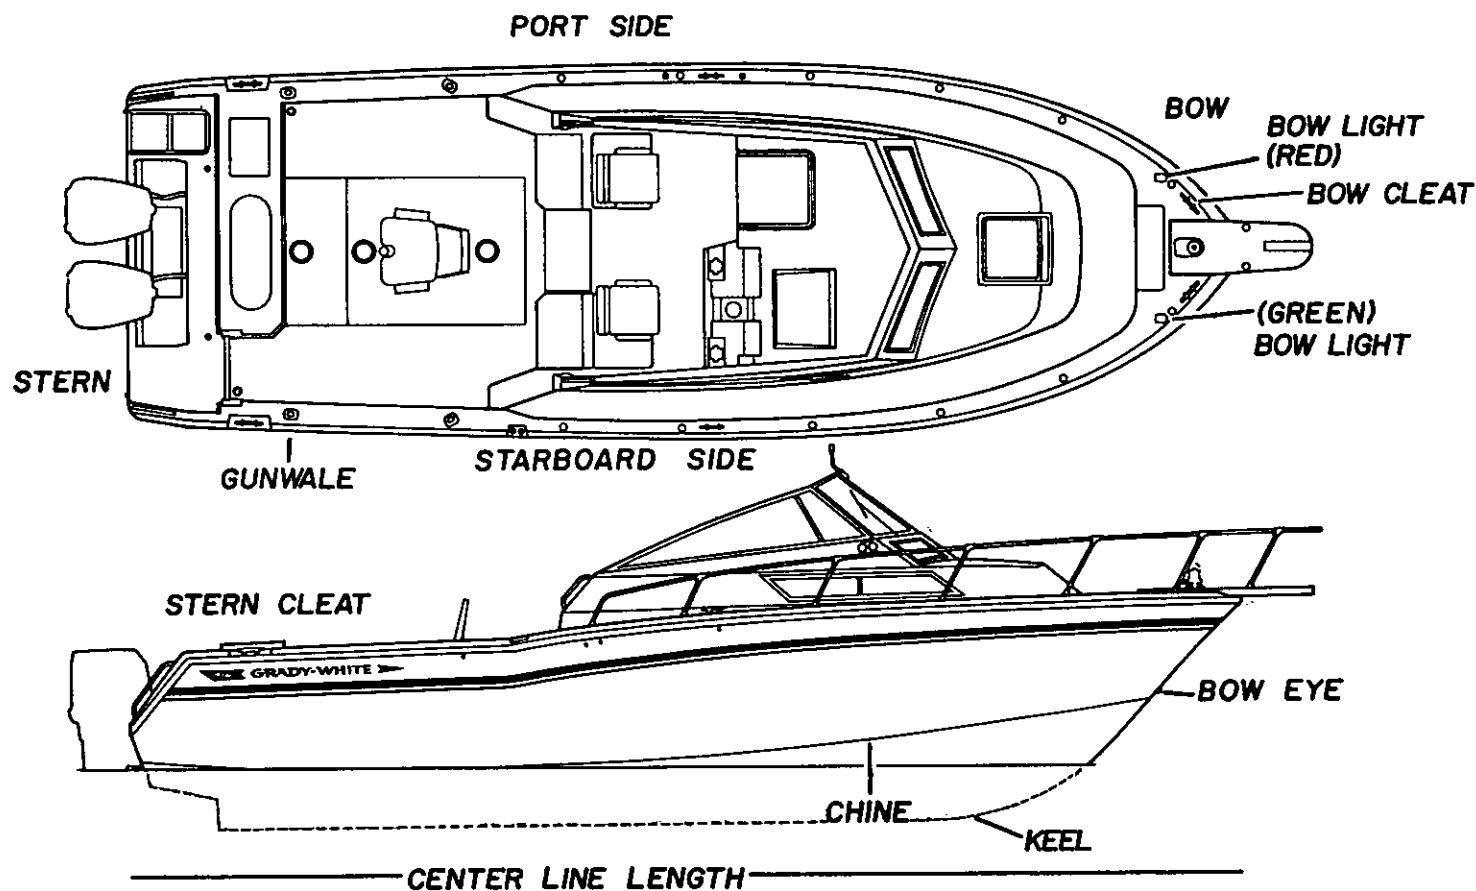

abeam — object 90 degrees to center line on either side of boat

abaft — a point on a boat that is aft of another

aft — toward the rear or stern of the boat

beam — the greatest width of a boat

bilge — the lower interior area of the hull

bow — the fore part of a boat

bulkhead — vertical partition in a boat

chine — meeting juncture of topside and bottom of boat

chock — deck fitting, used as guides for mooring or anchor lines

cleat — deck fitting with arms or horns on which lines may be made fast

deck — upper structure which covers the hull

draft — depth of water required to float boat

fathom — six feet

freeboard — height of topside from water line to the deck

gunwale (or gunnel) — meeting junction of hull and deck

hatch — an opening in the deck to provide access below

head — a toilet or toilet area in a boat

headroom — vertical distance between the deck and cabin or canopy top

hull — the basic part of a boat; a watertight vessel that provides buoyancy to float the weight of the craft and its load

keel — the major longitudinal member of a hull — the lowest external portion of a boat

knot — unit of speed in nautical miles per hour

lee — the side that is sheltered from the wind

port — opening in a hull to admit light and air or lateral directions — term designating left side of the boat

port light — a hinge or sliding port in a boat hull

scupper — holes permitting water to drain overboard from deck or cockpit

sheer — curve or sweep of the deck as viewed from the side

starboard — lateral direction term designating right side of the boat

stern — the aft end of a boat

stringer — longitudinal members fastened inside the hull for additional structural strength

wake — disturbed water that a boat leaves behind as a result of the motion

windward — toward the direction from which the wind is blowing

INDEX

A

AC/DC Panel.....	17
AC/DC Panel Wiring Diagram (300 MARLIN).....	48
AC Transfer Switch.....	19
Accessory Switch.....	16
Accessory Wiring Diagram	
263 CHASE.....	68
268 ISLANDER.....	64
300 MARLIN.....	46
272 SAILFISH.....	57
Accidents.....	9
Air Conditioner.....	18
Air Conditioning Assembly (300 MARLIN).....	52
Air Conditioning Layout (300 MARLIN).....	53
Anchoring.....	26
Anti-fouling Paint.....	34
Auxiliary Switches (AC powered).....	17
Auxiliary Switches (DC powered).....	18

B

Battery.....	37-38, 40
Battery Charger Switch.....	17
Battery Select Switch.....	19
Battery Select Wiring Diagram	
268 ISLANDER and 272 SAILFISH.....	62
300 MARLIN.....	49
Battery Voltage Indicator.....	13
Bilge Pump Switch.....	16
Boating Hotline.....	9
Boating Safety Tips.....	9

C

Cabin Lights.....	18
Cabin Outlets Switch.....	18
Canvas.....	35
Carbon Monoxide.....	10
Cavitation.....	32
Certification Tag.....	11
Clock.....	14
Cockpit Light Switch.....	16
Cockpit Switch Panel.....	18
Commonly Used Nautical Terms.....	73
Compass.....	40

D

Deck Pump-out.....	41, 42, 43
Discharge Regualtions.....	9
Distress Signals, visual.....	7, 9
Docking.....	27
Dockside Power.....	17-18
Dockside Power Wiring Diagram	
268 ISLANDER.....	65
300 MARLIN.....	47
272 Sailfish.....	59
Duratrim Maintenance.....	35
Dynaplate Wiring Diagram.....	51

E

Economizer.....	15
Electronics.....	40
Engine.....	39
Equipment (recommended).....	8
Equipment (required).....	7-8

F

Fiberglass Finish.....	33-34
Fire Extinguisher.....	7
Fresh Water System Diagram	
263 CHASE.....	69
Flotation Tag.....	11
Fuel Gauge/Meter.....	12, 14
Fueling.....	21
Fuel Tank Compartment.....	36
Fuel System Maintenance.....	22, 36, 40
Fuel Switch.....	16
Fuse Sizes.....	44

G

Gelcoat.....	34
Generator Assembly.....	54
Generator Start/Stop Switch.....	19
Generator Wiring Diagram.....	55
Grounding.....	25

H

Hardtop Maintenance.....	36
Hardtop Wiring Diagram	
268 ISLANDER.....	66
300 MARLIN.....	50
272 Sailfish.....	58
Hardware Maintenance.....	36
Hardware Mounting.....	37
Head Operation.....	41-43
Heat Outlet Switch.....	18
Horn.....	7, 16
Hull/Deck/Liner Layout.....	72
Hydraulic Steering.....	20

I

Instrument and Switch Panel Wiring Diagram	
Outboards.....	45
Instrument Panel.....	12-15

L

Launching.....	24
Lighting.....	8
Livewell Switch.....	16
Livewell System (263 Chase) option.....	70
Livewell/Washdown System.....	71
Load Distribution.....	21, 32

M

Main Power Switch.....	17, 18
Microwave.....	17

N

National Marine Manufacturers Association (NMMA).....	11
Navigation/Anchor Lights.....	16
NMMA Certification Tags.....	11
Nuetral Lock-out Button.....	28

O

Oil Quantity Gauge/Warning Light.....	12, 14
Overboard Discharge.....	41, 42, 43

P

Penetrol.....	35
Personal Flotation.....	7
Plexiglass Maintenance.....	35
Polyethylene Maintenance.....	35
Pre-Start Checklist.....	24
Pressurized Shower/Hot Water System	
268 ISLANDER.....	67
300 MARLIN.....	56
272 SAILFISH.....	60
Primer Pump Switch.....	16
Propeller.....	32

R

Recovery.....	25
Refrigerator.....	18
Registration Numbers.....	7
Rigging Compartments.....	38
Rudder Trim Tab.....	31

S

Scuppers.....	37
Shower Sump Pump Switch.....	18
Speedometer, digital.....	13, 14
Stainless Steel Maintenance.....	36, 40
Starting.....	24
Stereo.....	18
Stereo Wiring Diagram.....	51
Stove.....	17
Switch Panel.....	15
Synchronizer.....	15

T

Tachometer Gauge, digital.....	14
Throttle/Shift Control.....	28
Tilt Steering.....	20
Totalizer.....	15
Towing.....	25
Trailerling.....	23
Trim.....	14, 29
Trim Gauge.....	12
Trim Tabs.....	30, 31
Trim Tab Pump Location.....	31
Trim Tab Switch.....	30
Trip Meter.....	14

U

Undocking.....	27
Upholstery.....	34

V

Visual Distress Signals.....	7
Voltmeter.....	12

W

Water Heater Switch.....	17
Water Pressure Gauge (OMC pre-rig).....	13
Water Temperature Gauge (Mercury pre-rig).....	13, 14
Water Temperature, Oil Level, and Fuel System Warning Buzzer.....	13, 14
Washdown/Livewell System.....	71
Washdown Switch.....	16
Water Pressure Switch.....	18
Windlass.....	26
Windshield Wiper Switch.....	16
Winterization.....	39-40
Wiring Color Codes.....	44

LIMITED WARRANTY

REGISTRATION OF PURCHASE: The "Federal Boat Safety Act of 1971" requires all boat manufacturers to maintain a record of all first retail purchasers and their current address for the purpose of notification in case of defective parts or equipment, or in case of non-compliance with standards or regulations set forth by this act. Under the act, failure to complete and return your factory warranty card for our records will waive your right to notification of defect and/or repair at manufacturers expense.

FIVE YEAR HULL WARRANTY

Grady-White warrants to the original retail purchaser of each new Grady-White Boat that under normal use the hull will be free from structural defects for a period of five years from the date of delivery to the original retail purchaser. Any structural defects covered by the warranty will be repaired free of charge at either the Grady-White factory in Greenville, North Carolina, or at an authorized Grady-White dealer location as elected by Grady-White. Transportation to and from the point of repair will be the responsibility of the owner with all repairs subject to prior written authorization by Grady-White Boats, Incorporated. **NO BOAT IS TO BE SENT TO THE GRADY-WHITE FACTORY WITHOUT SUCH WRITTEN AUTHORITY.**

ONE YEAR MATERIAL AND WORKMANSHIP WARRANTY

Grady-White further warrants to the original retail purchaser of each Grady-White boat that under normal use it will be free from defects in workmanship and material for a period of 12 months from the date of delivery to the original retail purchaser. Necessary repairs under this warranty will be made free of charge at Grady-White's factory in Greenville, North Carolina or at an authorized Grady-White dealer as elected by Grady-White. **NO BOAT OR PART THEREOF IS TO BE SENT TO THE GRADY-WHITE FACTORY WITHOUT SUCH WRITTEN AUTHORITY.**

EXCLUSIONS

This warranty specifically does not include the following:

1. Damage caused by abuse, negligence, vandalism, lack of maintenance, improper storage or accident.
2. Any statements, representations, or warranties given by dealer or other third persons other than those provided within this warranty.
3. Any unit which is part of a rental fleet, used for racing or commercial purposes.
4. The following consequential damages: a) loss of time; b) inconvenience; c) towing charges; d) expenses for travel, lodging, telephone, and gasoline; 3) loss or damage to personal property or loss of revenue; f) loss of use of the boat.
5. This warranty specifically does not apply to engines, outdrives, propellers, controls, mechanical steering, bilge pumps, and any other part expressly warranted by the manufacturer thereof. In addition, also excluded are gel coat cracking, gel coat crazing, gel coat blistering or fading, chrome, windshields, glass breakage, all vinyl upholstery and canvas, instruments and gauges, and leakage around windshields, windows, hatches, and other apertures.
6. Any boat which has been overpowered according to the maximum Grady-White recommended engine horsepower specifications on the capacity plate affixed to the boat.

WARRANTY CLAIM PROCEDURES

Upon the discovery of a defect, the owner is to promptly contact the Grady-White dealer, from whom the owner purchased the boat who will effect the corrective action under this warranty upon prior written authorization from Grady-White Boats, Incorporated.

THESE WARRANTIES ARE EXPRESSLY MADE IN LIEU OF ALL OTHER WARRANTIES, DURATION OF ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE SHALL BE LIMITED TO AND COINCIDENT WITH THE DURATION OF THESE EXPRESSED WARRANTIES.

THIS WARRANTY SHALL NOT BE VALID UNLESS THE FACTORY WARRANTY POSTCARD IS PROPERLY EXECUTED AND MAILED WITHIN 10 DAYS OF THE PURCHASE OF YOUR GRADY-WHITE BOAT.

GRADY-WHITE BOATS, INC.
P.O. Box 1527
Greenville, N.C. 27834

CUSTOMER SERVICE: (919) 752-2111
MONDAY - FRIDAY
8 am TO 5 pm (EST)

REVISED 8/94