



Welcome Aboard!

Congratulations! Welcome to the Grady-White "family" of proud and friendly boat owners.

The Grady-White you have purchased is the strongest, safest, and highest quality boat you can buy. It was built by dedicated craftsmen in the most modern boat-building facility in the United States. All of us at Grady-White Boats wish you many happy, carefree hours of boating in your Grady-White.

Your Grady-White boat meets or exceeds every safety standard of the U.S. Coast Guard and the National Marine Manufacturers Association's NMMA Certification Program. Your Grady-White's safety and seaworthiness, however, depends on your operation, maintenance and care of your boat. That's why we have put a great deal of time and thought into this owner's manual. It includes the precautions, facts and tips that will help make your boating safe and enjoyable. Please study this manual thoroughly!

My thanks to you for choosing Grady-White. All of us here at the factory are dedicated toward meriting your confidence in Grady-White Boats. Happy boating and welcome aboard.

Sincerely yours,

Wiley B. Corbett
President

TABLE OF CONTENTS

WELCOME ABOARD
DATA SPECIFICATION SHEET

Safety

GOVERNMENT REGULATIONS.....	PAGE 5
RULES OF THE ROAD	PAGE 7
LOADING	PAGE 9

Instruments and Controls

INSTRUMENTS AND SWITCHES	PAGE 10
Tachometer	PAGE 10
Engine Water temperature gauge.....	PAGE 10
Water temperature warning buzzer	PAGE 11
Voltmeter	PAGE 11
Trim gauge	PAGE 11
Fuel gauge	PAGE 11
Oil pressure gauge	PAGE 11
Ignition switch	PAGE 12
Trim/Tilt switch	PAGE 12
Trim tab switch	PAGE 12
Bilge pump switch.....	PAGE 13
Blower switch	PAGE 13
Horn button	PAGE 13
Cockpit light switch	PAGE 13
Nav/Anchor light switch	PAGE 13
Fuel switch	PAGE 14
Aerator switch	PAGE 14
Washdown pump switch	PAGE 14
Water pressure switch	PAGE 14
Windshield wiper switch	PAGE 14
Battery select switch	PAGE 14
Auxiliary fuse panel	PAGE 15

Mechanical Controls

STEERING	PAGE 16
THROTTLE/SHIFT CONTROL	PAGE 17
TROUBLE SHOOTING	PAGE 18
TRIM TABS	PAGE 19

Boat Operation

FUELING	PAGE 20
PROPELLERS	PAGE 22
TRAILERING	PAGE 23
PRE-LAUNCH	PAGE 24
STARTING	PAGE 24
PERFORMANCE	PAGE 25
ANCHORING	PAGE 26
DOCKING	PAGE 27

TABLE OF CONTENTS - Continued

Maintenance and Care

FIBERGLASS FINISH	PAGE 28
GELCOAT REPAIR	PAGE 29
INTERIOR MAINTENANCE	PAGE 30
CANVAS	PAGE 30
TEAK	PAGE 31
HARDWARE	PAGE 31
HARDWARE MOUNTING	PAGE 31
BATTERY	PAGE 32
SCUPPERS	PAGE 33
RIGGING COMPARTMENTS.....	PAGE 33
ENGINE	PAGE 33
GRADY DRIVES	PAGE 33
STORAGE	PAGE 34

Electrical Systems

FUSE SIZES	PAGE 35
WIRING COLOR CODES AND SIZES	PAGE 35
INSTRUMENT AND SWITCH PANEL WIRING DIAGRAM (TYPICAL OUTBOARD)	PAGE 36
INSTRUMENT AND SWITCH PANEL WIRING DIAGRAM (TYPICAL STERN DRIVE)	PAGE 37
ACCESSORY WIRING DIAGRAM 190 TOURNAMENT	PAGE 38
ACCESSORY WIRING DIAGRAM 204 FISHERMAN	PAGE 39
ACCESSORY WIRING DIAGRAM 20' OVERNIGHTER SERIES	PAGE 40
ACCESSORY WIRING DIAGRAM 225 TOURNAMENT	PAGE 41
ACCESSORY WIRING DIAGRAM 23' GULFSTREAM SERIES	PAGE 42
ACCESSORY WIRING DIAGRAM 22' SEAFARER AND 24' OFFSHORE SERIES	PAGE 43
ACCESSORY WIRING DIAGRAM 25' SAILFISH SERIES	PAGE 44
ACCESSORY WIRING DIAGRAM 25' TROPHY PRO SERIES	PAGE 45
HARDTOP WIRING DIAGRAM 25' SAILFISH SERIES	PAGE 46
HARDTOP WIRING DIAGRAM ALL MODELS	PAGE 47
DOCKSIDE POWER	PAGE 48
AC WIRING SCHEMATIC AND WARNING LABEL	PAGE 49

Water Systems

PLUMBING DIAGRAM 25' SAILFISH SERIES	PAGE 50
SHOWER & HOT WATER SYSTEM (PRESSURIZED) FOR 25' SAILFISH SERIES	PAGE 51
FRESH WATER SYSTEM (PRESSURIZED) FOR 25' TROPHY PRO SERIES	PAGE 52
FRESH WATER SYSTEM FOR 22' TOURNAMENT	PAGE 53
FRESH WATER SYSTEM 20', 22', 23' AND 24' SERIES	PAGE 54
FRESH WATER SYSTEM FOR 204F	PAGE 55
WASHDOWN/LIVEWELL SYSTEM	PAGE 56
ENGINE ACCESS LIVEWELL	PAGE 57

General Construction

TYPICAL GAS TANK DRAINAGE.....	PAGE 58
HULL/DECK/LINER LAYOUT.....	PAGE 59
NAUTICAL TERMS	PAGE 60
WARRANTY	PAGE 61

Required Safe Equipment and Additional Recommended Equipment

The U.S. Coast Guard requires that every boat has on board specific equipment which varies according to the size of the boat. There are also local agencies which require additional equipment, so find out if your local regulations require more equipment than the list of Coast Guard requirements below.

As your Grady-White is between 16 and 26 feet, it is classified as a Class 1 boat and requires the following safety equipment:

1. **FIRE EXTINGUISHER**
Your fire extinguisher should be easily accessible and each passenger should be aware of its location.
2. **PERSONAL FLOATATION**
Each passenger (and skier) must have a U.S. Coast Guard approved personal floatation device. They should be stored where they can be reached easily and quickly. Small children and nonswimmers should wear these floatation devices at all times. Each Class 1 boat is also required to carry an approved Type 4 throwable floatation device such as a ring bouy or boat cushion.
3. **HORN**
All Class 1 boats are required to carry a hand, mouth or power-operated horn that is audible for at least one mile.
4. **VISUAL DISTRESS SIGNALS**
Coast Guard-approved visual distress signals are now required when operating in U.S. waters and on the high seas. The Coast Guard pamphlet "Visual Distress Signals for Recreational Boats" tells you the equipment necessary.
5. **REGISTRATION NUMBERS**
Federal and state laws require that a power boat be registered in the state where it is principally used. Both registration numbers and validation stickers must be displayed according to the regulations and the registration certificate must be carried on board. The boat's serial number, required on the registration form, is found on the upper right hand corner of the transom.
6. **LIGHTING**
All Grady-Whites are equipped with navigational lights which meet the latest requirements for inland and international waters. If there is any doubt, or if requirements change, consult your dealer.

For more information on Coast Guard required safety equipment refer to the U.S. Coast Guard publication CG-290.

In addition to required safety equipment, we also recommend the following:

ADDITIONAL RECOMMENDED EQUIPMENT

Anchor and anchor line	Hand operated bilge pump
Sea anchor	Extra keys
Tow line	Boat hook
Fenders (2)	Extra drain plug
Mooring lines (4)	Oar or paddle
Spotlight or flashlight	Insect repellent
Spare fuses	Drinking water
First aid kit	Sun screen
Compass and navigational charts	Brush, Bucket and sponge
Marine electronics	Tool kit including: adjustable wrench, slip-joint pliers, spark plug wrench and spark plugs, screwdrivers (slotted & phillips'), box end wrench set, hammer, roll of soft wire, electricians tape, knife, spare propeller & prop nut, and spare hydraulic fluid.

BOATING SAFETY

The following tips will add to your boating safety and convenience:

1. Advise someone on shore or the local Coast Guard as to the name of your launch site, your expected direction and expected return.
2. Watch the weather. You should not attempt to go out when there are storm or small craft warnings. If you are caught in a storm, reduce speed, head into the wind/waves and keep all gear and passengers close to the centerline of the boat for stability. Head for the nearest shelter.
3. Instruct at least one passenger on the fundamentals of operating your boat in case of any emergency.
4. Report any boating accident to the local authorities whether you are involved or not.

IN CASE OF ACCIDENT

 If you are involved in a boating accident on the navigable waters of the U.S., you are required by law to stop and render assistance. You are also required to identify yourself and your boat to the injured person or owner of the damaged property. An accident report must be filed for accidents of over \$100 property damage with proper authorities within five days of the accident. If the accident results in death, disappearance or injury requiring medical attention, an accident report must be filed within 48 hours. Report forms may be obtained through Coast Guard installations, most harbor patrol offices, and many sheriff's and police stations.

5. If you develop trouble and do not have a radio, the regulation distress signal is continually raising and lowering your arms outstretched at your sides. Other signals include waving a shirt tied to a pole, repeatedly sounding your horn or flying your boat's ensign upside down and lighting flares.
6. If your boat is equipped with canvas which encloses the aft cockpit and the propulsion equipment, do not operate the boat with this canvas closed. The fumes from the engine create a health hazard.
7. Keep your boat speed under control. Respect for other boaters and those on shore is common courtesy. In addition, the operator is responsible for any injury or damage caused by the boat's wake. Your wake could swamp or damage a smaller craft and endanger its passengers. Stay alert to areas having signs posted "No Wake Zones".
8. Be prepared to give assistance to other boats in distress.

9. Become familiar with the handling characteristics, capabilities and limitations of your boat.
10. Turn off engines before swimmers enter or exit the boat.
A shift lever in neutral could become engaged accidentally,
injuring swimmers seriously.
11. Consult with people familiar with the boating area when venturing into
unknown waters. Obtain a chart for new areas whenever possible.
12. Since clean water and air are the responsibilities of everyone, carry a
litter container on board and dispose of refuse properly. If your
Grady-White is equipped with a marine head, become familiar with local
laws regarding discharge of waste.
13. Recommend boat shoes or tennis shoes to your passengers rather than
street shoes or bare feet.




Close to the steering wheel, you will find a Coast Guard capacity Information metal tag indicating the maximum weight and people capacity of your boat. If you have an outboard or Grady Drive boat, the tag will also designate the maximum horsepower capacity. You and your passengers will be in jeopardy and your warranty void if either of these requirements are exceeded.

Though overloading is a primary cause of boating accidents, improper loading is equally as hazardous. The load your boat will carry is not necessarily indicated by the weight it is carrying.

The capacity plate does not relieve the boatman from the responsibility of sound judgement. Rough water and adverse conditions can reduce the boat's capacity, so you should maintain a watch on weather conditions.

Example: 190 Tournament
Capacity Plate

U. S. COAST GUARD	
MAXIMUM CAPACITIES	
8	PERSONS OR 1095 LBS
2400 LBS. PERSONS, MOTOR, GEAR	
200 OH.P. MOTOR	
THIS BOAT COMPLIES WITH U.S. COAST GUARD SAFETY STANDARDS IN EFFECT ON THE DATE OF CERTIFICATION	
MANUFACTURER:	GRADY WHITE BOATS INC.
MODEL:	19 GREENVILLE, NC
DESIGN COMPLIANCE WITH NMMA REQUIREMENTS BELOW IS VERIFIED. MFG. RESPONSIBLE FOR PRODUCTION CONTROL.	
LOAD AND H. P. CAPACITY • LEVEL FLOTATION STEERING, FUEL AND ELECTRICAL SYSTEMS COMPARTMENT VENTILATION • INTERNATIONAL LIGHTS	
	NATIONAL MARINE MANUFACTURERS ASSN.


This tag, provided by the National Marine Manufacturers Association, means that your Grady-White is BIA certified. This means your fuel system, lighting, ventilation, steering, floatation, capacities and horsepower ratings not only are in compliance with the U.S. Coast Guard Regulations, but also meet the more stringent standards of the American Boat & Yacht Council.

The National Marine Manufacturers Association is a national trade organization serving all elements of the recreational boating industry including manufacturers of boating equipment. Their standards mean you can have confidence in the quality of your boat.



Instruments and Switches

The instruments in stern drive models are electrically connected to the ignition key and operate when the key is on. Fuel gauges on outboard models are electric, but not connected to the ignition so there is a separate switch to activate the fuel gauge.

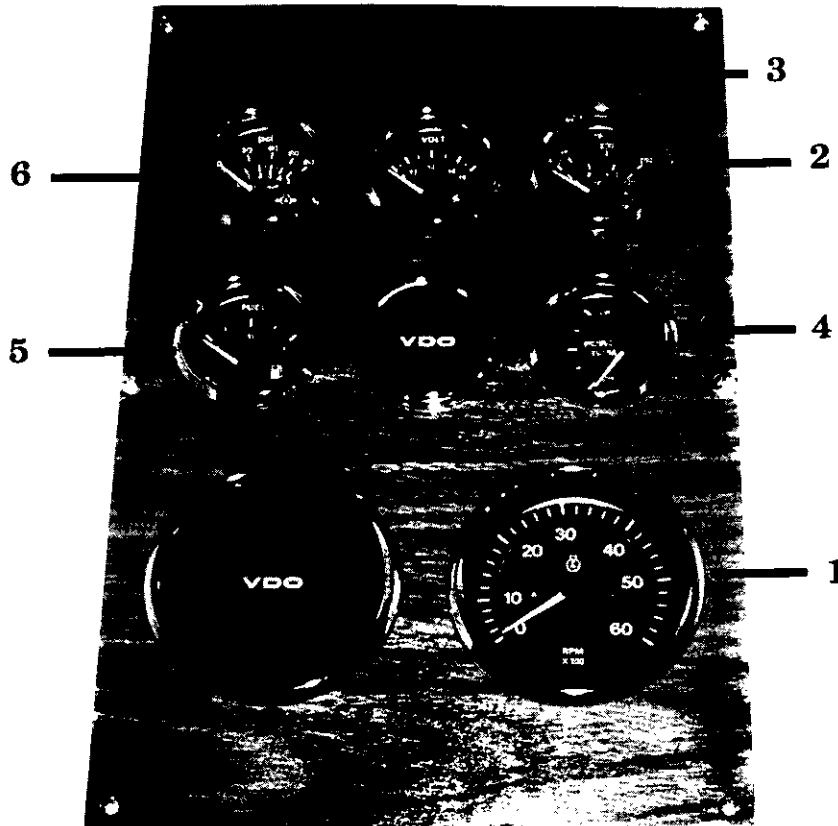

1. TACHOMETER GAUGE

Standard equipment on stern drive models, the tachometer indicates engine revolutions per minute (RPM) in 100's. Consult your engine owner's manual for recommended operating RPM's.

2. ENGINE WATER TEMPERATURE GAUGE

Standard on stern drive models, this gauge indicates the temperature of the cooling water circulating through your engine. When the

temperature exceeds the recommended operation range indicated by your engine owner's manual, immediately shut off your engine to prevent damage. Overheating is often caused by obstruction of your engine's intake on the lower unit. Check the intake first if you experience trouble.

WATER TEMPERATURE, OIL LEVEL, AND FUEL SYSTEM WARNING BUZZER

(Not shown on diagram)

Outboard models may have a warning buzzer installed by the dealer which is in the throttle control or under the dash.

3. VOLTMETER

This meter indicates the battery charge. With the ignition "on", a reading of 12 or 13 volts is normal, indicating a fully-charged battery. Readings below 11 indicate a weak battery which may not start the engine(s). A reading of 13 to 15 volts when the engine is running is normal. Readings over 15 volts may indicate regulator problems. Low or fluctuating readings may indicate loose connections, loose belts, or trouble in the regulator and alternator circuit. A voltage drop soon after the engine is shut down indicates a bad battery or a heavy load on the electrical system.

4. TRIM GAUGE

This trim gauge is standard on all stern drive models. This gauge indicates the angle of thrust of the lower unit of the engine(s). See the PERFORMANCE section of manual for trim adjustment recommendations.

5. FUEL GAUGE

This gauge indicates the gas tank fuel level. The electric sending unit senses the level of fuel and indicates this on the gauge. When reading this gauge, remember two things: (1) the accuracy of your gauge varies with the attitude of your boat in the water (trim or list) and (2) the fuel pick-up tube inside the gas tank is not capable of withdrawing all of the fuel from the tank. So never operate your boat at extremely low fuel levels.

6. OIL GAUGE


The oil gauge is standard on all stern drive models. This gauge indicates the oil pressure at the engine. Consult your engine owner's manual for proper operating ranges.

IGNITION SWITCH (Not shown on diagram)


The ignition switch is factory installed on all stern drive models.

TRIM/TILT SWITCH


Trim and tilt are standard on most stern drive models. The trim and tilt switches are located in the throttle control or as separate switches on the dash. The trim switch changes the angle of thrust of the engine (see PERFORMANCE section). The tilt switch raises the drive unit for trailering.


**TRIM TAB SWITCH**

Trim tab switches control the optional trim tabs used for adjusting the attitude of the boat while running. (See TRIM TABS in the PERFORMANCE section).

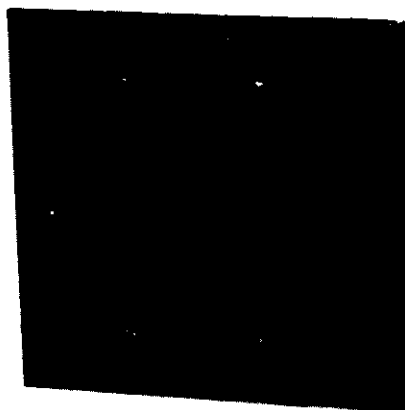**HEAD DISCHARGE BUTTON**

To discharge the holding tank overboard, open the overboard seacock near the holding tank. Turn the monitor on at the control panel. Note that the monitor switch must be on in order to operate the discharge button. Press the discharge button until lights on control panel indicate the tank is empty. **IMPORTANT!** Overboard discharge must be sealed and secured in the closed position within the three mile limit.

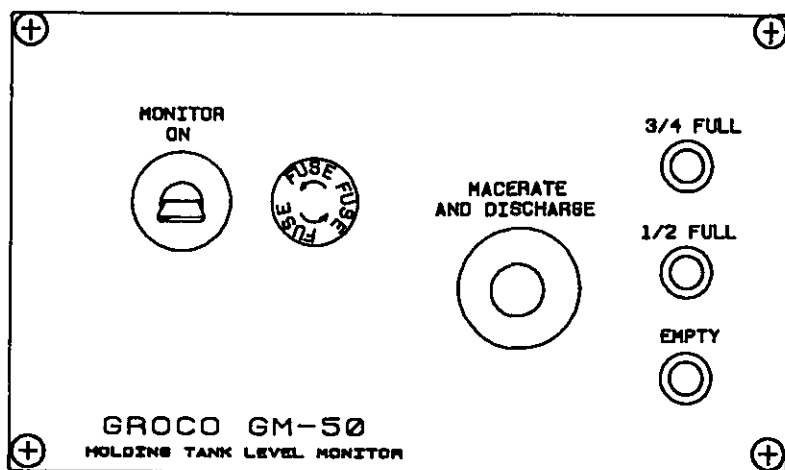

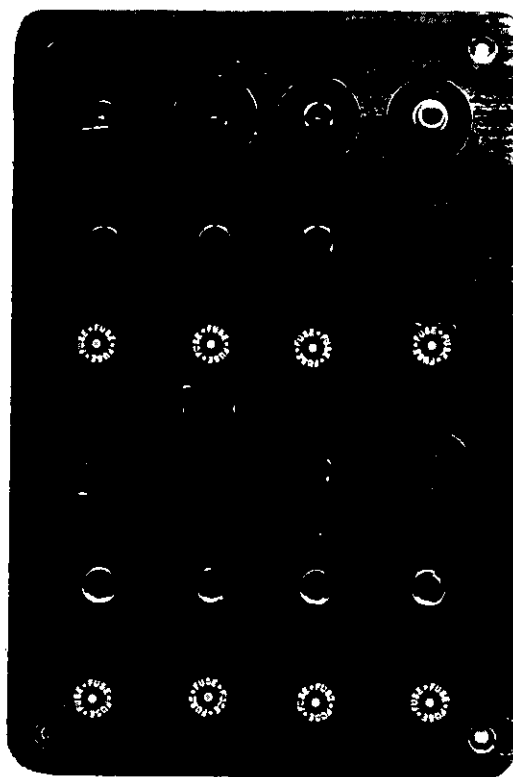

SWITCH PANEL

At the helm station you will find an accessory switch panel similar to the above picture. Auxiliary switches are noted below.

BILGE PUMP

The 2-way switch serves as an overriding manual switch in case of failure of the automatic switch in the bilge.

BLOWER

The blower is standard on stern drive models. The blower eliminates any gasoline fumes from the engine compartment and should be run at least 4 minutes before starting the engine and should be in operation when running slower than cruising speed.

HORN

The horn is standard.

COCKPIT LIGHTS

The cockpit lights are standard and are located in the cockpit area.

NAVIGATIONAL/ANCHOR LIGHTS

All models are equipped with lights meeting International lighting rules. The three position switch (NAV-OFF-ANCHOR) which changes the lighting configuration for running lights or anchoring lights.

FUEL GAUGE

The fuel gauge is standard in all outboard models. This switch must be in the "on" position for a reading. When there are dual tanks, a 3-position switch (MAIN-OFF-AUX) gives you separate readings for each tank.

AERATOR

The aerator is optional equipment.

WASHDOWN

The washdown system may be either optional or standard.

WATER PRESSURE

This switch activates the pressurized fresh water system.

WINDSHIELD WIPER(S)

The windshield wipers are standard on some boats.

ACCESSORY


Switches labeled "Accessory" are blank switches which are available for non-factory installed accessories.

NOTE: Most accessory switch panels have indicator light and fuse holders for each switch. (See the Electrical Systems section for recommended fuse amperages.) Switch identification labels are available from your dealer for non-factory installed options.

BATTERY SELECT SWITCH


The battery select switch allows selection of either of the two batteries, both batteries, or neither of the batteries (disconnected).

NOTE: Never turn the battery select switch to "Off" with the engine running as this could damage the charging system.

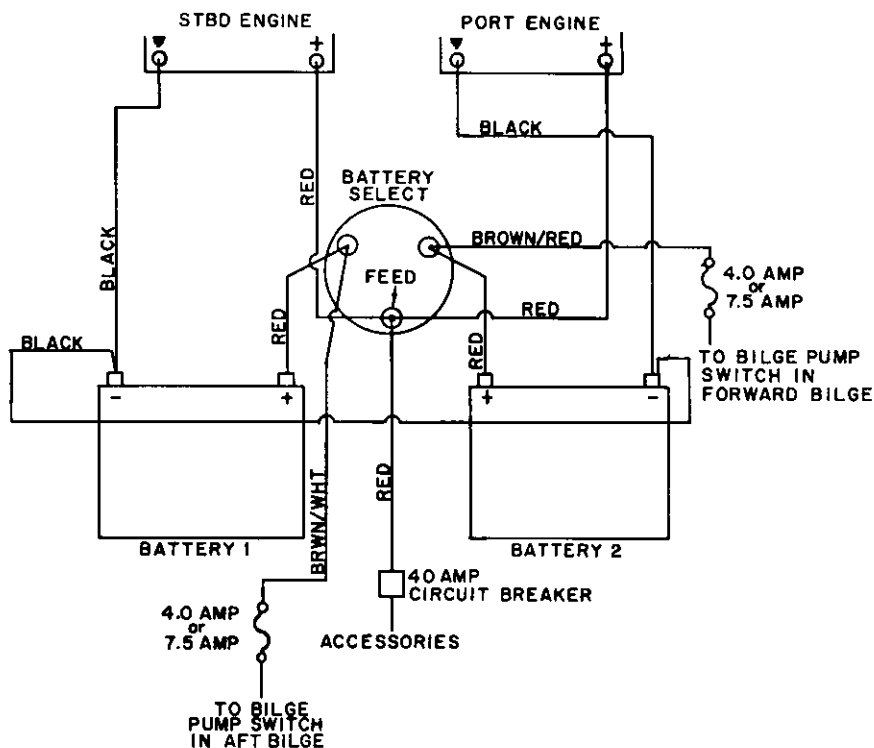

AUXILIARY FUSE PANEL

Located under the dash, the auxiliary fuse panel offers the ability to hook additional electronics in excess of the extra accessory switches located in the dash. Note a set of 10 gauge wires (orange and black) running from the panel. These wires terminate at a junction box on the port side on some models. This junction box offers convenient access to power for electronics installed on the port side. The 23 Gulfstream does not have a port junction box but it has a cross-over tube at the threshold for convenient access to the starboard fuse block. See the electrical diagrams for the location of the junction box & cross-over tube.

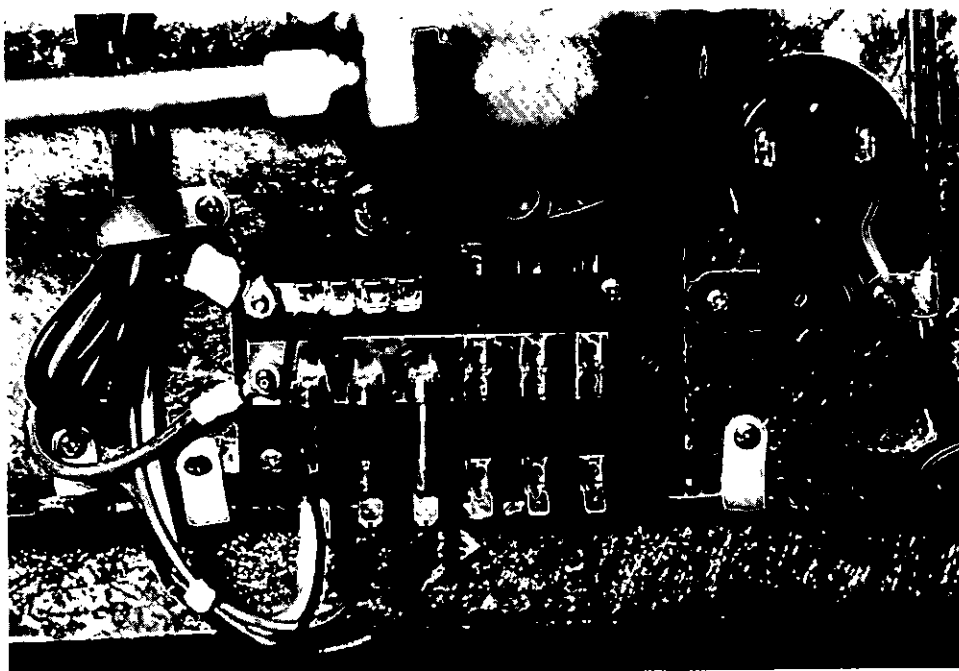

Mechanical Controls

MECHANICAL STEERING

The mechanical steering system is designed to require a minimum of maintenance. However, you should periodically inspect the complete steering system for wear, rust, or corrosion of the steering control heads, cable ends and attachments and lubricate the parts when needed. If you ever notice any change in the feeling of the system such as binding, looseness, noise or sticking, immediately perform a thorough inspection.

In outboard models, the push rod at the end of the cable is susceptible to freezing if improperly greased. When the boat is not in use, the motor should be turned so that the push rod is not exposed to the elements. If you operate in salt water areas lubrication is extremely important and you should make frequent inspections for corrosion.

HYDRAULIC STEERING

The hydraulic steering systems (not to be confused with power steering) require regular preventative maintenance for safe and reliable operation.

The oil level in the helm pump must be maintained within acceptable operating levels. A low oil level will cause air to be introduced into the steering system and result in unresponsive steering. The oil level should always be within 1/2 inch from the base of the fill hole, located on front top portion of the helm pump.

Check the steering system for oil leaks. An unchecked leak, in time, will result in unresponsive steering and/or possible loss of steering.

All moving mechanical linages, sliders, etc. must be greased and regreased as required with a high quality marine grease.

Refer to steering manufacturer's owner manual for specific specification recommendations and additional maintenance requirements. If owner's manual is missing, contact steering manufacturer for copy.


Please Note:

Any slow or sudden change in the "feel" of your steering system indicates an immediate requirement for a thorough inspection.

All repairs and replacements to steering systems should be made only by an authorized dealer.

THROTTLE/SHIFT CONTROL

The throttle/shift control, located at the helm station, controls the flow of fuel to the engine and acts as a gear shift lever to control the forward and aft thrust of the propeller.

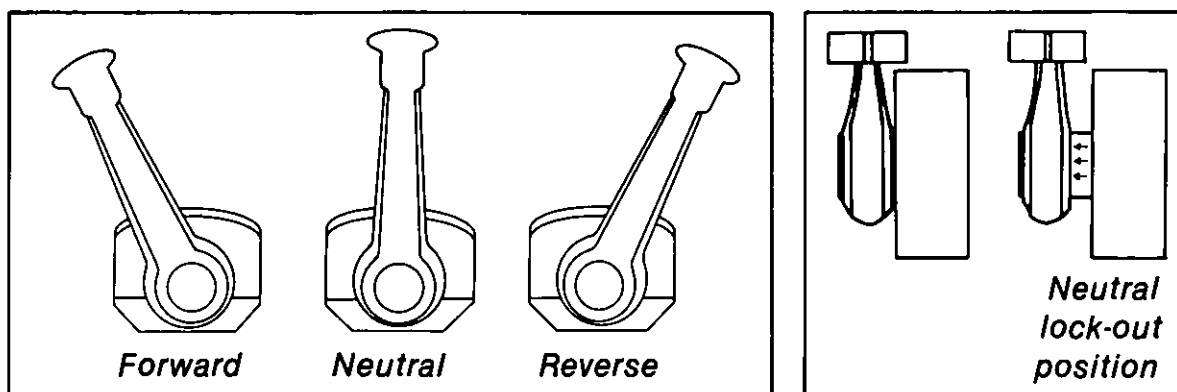

The vertical position of the throttle control is normally the neutral position. Move the control forward to engage the shifting mechanism which creates a forward thrust of the propeller. Increase the forward movement to increase the fuel flow to the engine and increase the forward thrust.

Move the control lever aft of the neutral position to reverse the shift mechanism to create a reverse thrust of the propeller. Increase the aft movement to increase the reverse thrust.

All controls have a safety mechanism which does not allow the engine to start when the control is in gear. In order to increase the flow of fuel to the engine while remaining in the neutral position, you may use the neutral lock out button in the control handle.

You may reverse the shift mechanism in order to provide a "braking action", slowing the boat. This braking action causes a following wake which may rise above the transom and flood the boat if the boat is moving at too great a speed, so exercise caution. Propellers are designed for maximum forward thrust, so reverse thrust will not be as efficient.

The control head at the helm should be cleaned and kept free of corrosion. Periodically check the mounting for loose screws. Also check the cable conduit for cracks, abrasions, or kinked or bent cable. Replace damaged cable (see your dealer).

The cable ends and cable fittings should be checked periodically for corrosion, loose brackets and loose, worn or damaged fittings. Replace worn or damaged parts. Cable ends, fittings and the control mechanism may be sprayed with a moisture-displacing lubricant. If your control has "quick disconnect" fittings, inspect the springs for corrosion. Should your throttle or shift cables need replacing, the data sheet at the front of this manual will indicate the lengths required.

Many throttle controls are equipped with trim buttons in the handle. Refer to the **PERFORMANCE** section for instructions on trim.

Trouble Shooting

ENGINE CONTROL

SYMPTOM	CHECK POINTS
<i>Engine starter does not engage when lever is in neutral position.</i>	<ol style="list-style-type: none"> 1. Neutral start switch not properly adjusted. 2. Neutral start switch malfunctioning or stuck. 3. Dead battery or loose electrical connection.
<i>Control becomes stiff or unusually hard operating, jerky and erratic</i>	<ol style="list-style-type: none"> 1. Control cable(s) are crushed, kinked or bent too sharply. 2. Cable(s) are corroded at ends or are clogged internally with dirt and grime. 3. Engine shift or throttle linkage not working properly. 4. Remote control mechanism is defective, faulty or has been damaged internally. 5. Foreign objects interfering with throttle or shift mechanism at either control head or engine.
<i>Throttle and shift does not respond properly to control hand lever.</i>	<ol style="list-style-type: none"> 1. Cable ends and connection fitting not properly secured at the engine or control head. 2. Wear in the control mechanism or excessive backlash caused by too many bends in the push-pull cable(s) conduit. 3. Control system not properly adjusted.
<i>Engine starter engages remote control hand lever is in forward or reverse.</i>	<ol style="list-style-type: none"> 1. Neutral start switch not properly adjusted. 2. Neutral start switch malfunctioning or stuck in "closed" position. 3. Faulty wiring.

PUSH-PULL CABLE STEERING


SYMPTOM	CHECK POINTS
<i>Steering stiff or unusually hard operating, jerky or erratic.</i>	<ol style="list-style-type: none"> 1. Corrosive deposits at cable output end, either inside cable sleeve or inside motor tilt tube. 2. Crushed or kinked cable conduit. 3. Bent cable ram at output end. 4. Friction device at helm over-tightened. 5. Internal corrosion or damage to cable. 6. Engine and boat not "Trimmed out" properly. 7. Engine trim tab loose, damaged or incorrectly set. 8. Transom bracket improperly mounted, bent or distorted. (Boat mounted systems only.) 9. Bent or distorted engine link may be interfering with engine. (Motor mounted systems only.)
<i>Steering sloppy and has excessive free steering wheel movement.</i>	<ol style="list-style-type: none"> 1. Cable transom bracket loose or cable and fittings loose or badly worn. 2. Steering wheel loose on helm. 3. Worn or loose fasteners in helm unit or drive unit. 4. Worn push-pull cable.
<i>Steering system won't turn.</i>	<ol style="list-style-type: none"> 1. Corrosive buildup at output end of cable. WARNING: If the system does not free easily, replace the steering cable. 2. System badly damaged at the helm or cable output end.

TRIM TABS

Trim tabs are electrically-hydraulically operated and used to regulate the attitude of the boat while underway. They may also be used to adjust the boat's running angle in adverse seas or to compensate for unusual load conditions.



The trim tabs are operated by a two rocker switch panel and will aid in trimming the boat fore and aft for a smoother ride.

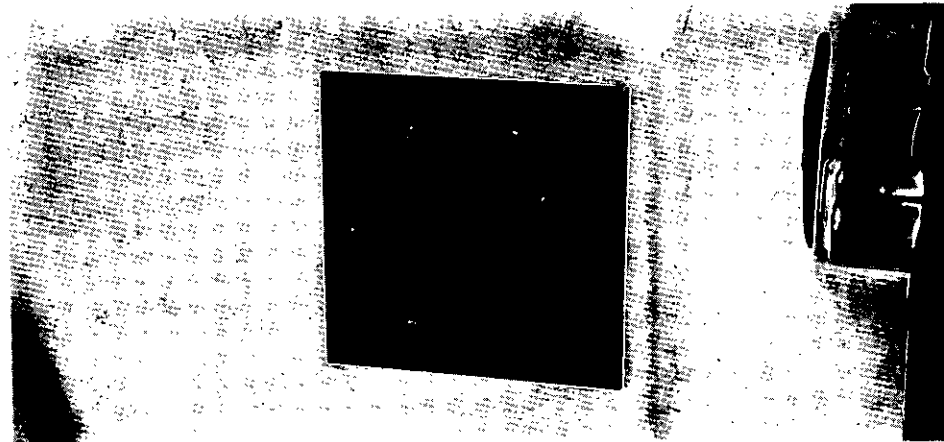

The switches are marked "bow down". Trim tabs in the extreme bow up positions will have no effect on the boat's ride.

Trim tabs can improve the ride of your boat by adjusting where the water is hitting the keel line. In a slight chop, the waves may be hitting the keel of your boat around the helm area, causing an uncomfortable ride. By adjusting the trim tabs and lowering the bow, the waves will hit the keel at a more forward point, softening the ride. Experimentation with your trim tabs in various sea conditions will help you determine the best positions for your boat under different load conditions.

Trim tabs are also useful in correcting listing from side to side under varying weight conditions. Usually the list can be corrected by pushing the "bow down" switch position on the higher side. This will tend to lower the bow by pulling the high side to a level position. If your bow is already in a low position, you may correct list by pressing the lower switch position on the lower side. This will cause the low side to rise the level the boat. It will also gradually improve the running angle.

Trim tabs in the extreme "bow down" position will cause the boat to come on plane with minimum bow rise. Unless you are operating at low speeds or with considerable cockpit weight, you will likely want to raise the tabs slightly when underway in order to avoid "plowing" water. With the tabs in the "bow down" position, you will be able to maintain a plane at the least possible RPM's.

When running in a following sea, the best performance is obtained with the tabs in the "bow up" position.

Boat Operation


FUELING

Safety during fueling requires common sense and caution. Please study the following procedure carefully, and ask your dealer if there is doubt about any procedure.

1. Check your engine's owners manual to make sure that you only take on the type of fuel specified by the manufacturer. Do not use gasoline containing alcohol. If you operate an outboard, check the type of oil and the oil-to-gas ratio recommended in the engine manual. Oil should be added in the fueling process when mixing with gas in order to insure the correct amount and proper mixture.
2. Close all ports, hatches, windows and engine compartments before fueling in order to prevent gasoline fumes from accumulating.
3. Stop all engines, motors, fans (including bilge pump) and turn off lights before fueling.
4. Extinguish all cigarettes and other lighted materials.
5. Observe fuel flow constantly to prevent overflow or spillage.
6. After fueling, wash down and clean off any spilled fuel. Dispose any rags, sponges, etc., used for clean-up on shore. Do not carry these rags on board.
7. Avoid an empty fuel tank, even during storage, as condensation can develop and result in water in your fuel system.
8. In stern drive boats, turn the bilge blower on and run at least 4 minutes before starting engines. Checking for gas fumes in the engine compartment before starting and continue to run the blower until they are eliminated.
9. After securing the fuel cap, open all ports, windows, hatches and engine compartments. Ventilate all other closed areas.
10. Look to see if gasoline was spilled into the bilge during fueling.
11. Dual fuel tank installations are equipped with a manual switching valve for tank selection. Select the tank that allows best performance for your boat. Performance will be effected by the type of engine and weight distribution.




12. The fuel tank compartment is sealed with a removable compartment drain plug located to the starboard side of the keel line drain tube in the aft bilge compartment. This plug should be removed periodically to drain any water accumulation in this area.

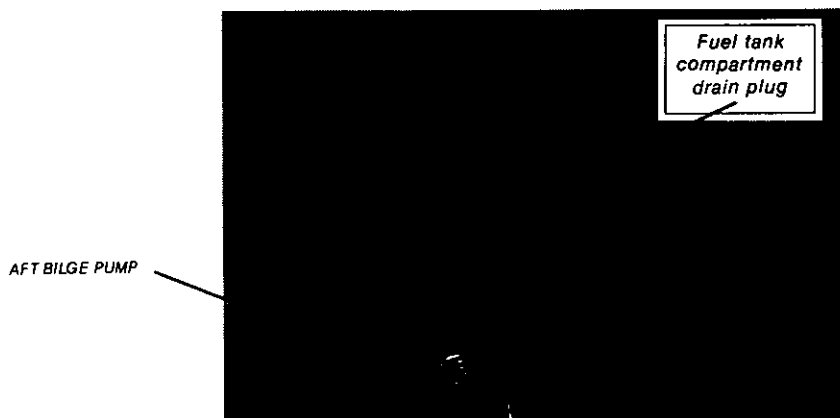

Fuel Maintenance Tips

If you are experiencing fuel flow problems, a quick method of checking if the problem is in your fuel system is to connect a 6-gallon portable tank to your engine.

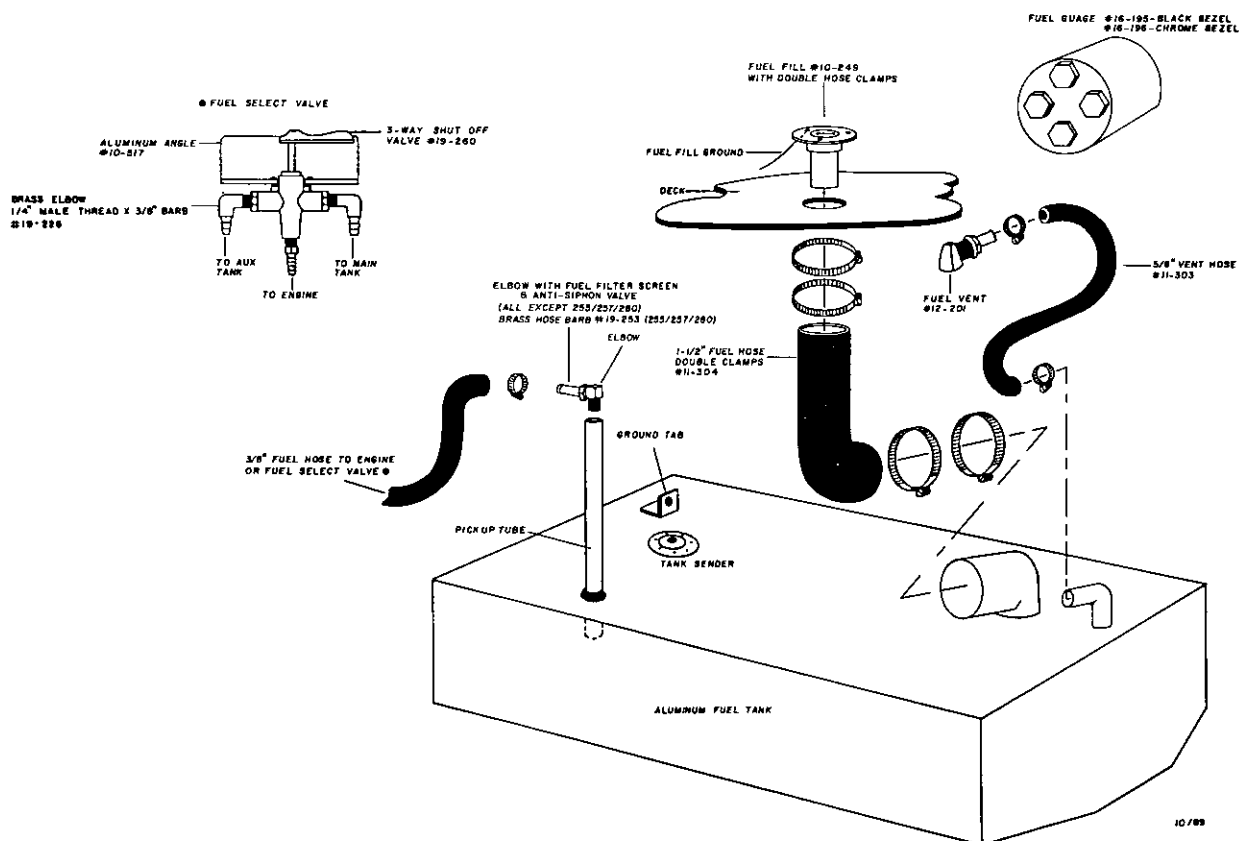

Your fuel tank is equipped with an antisiphon valve and a removable fuel filter screen (see diagram for location) which should both be checked if you are experiencing problems.

The Manual shut off valve should be closed when servicing the fuel system to avoid any spillage of fuel into the bilge.

Do not use fuels containing alcohol. Alcohol, particularly methanol, will shorten the life of elastomers such as hoses and gaskets and water which alcohol absorbs makes fuel more corrosive to metals in tanks and carburetors.


Each time you fuel up, inspect the fuel lines, connections and fuel tanks for tightness, signs of leaks and deterioration. At least annually, conduct a more thorough inspection of fuel system components, especially those hidden from a routine inspection. Replace any deteriorated hoses, clamps, connections and fittings.

Propeller

The condition of your propeller has a major influence on your boat's performance. Your engine is equipped with the best size propeller for normal conditions. If you have unusual uses or weight conditions, you may require different propellers for different applications. It is advisable to keep an extra propeller on board. A damaged propeller can effect your boat's top speed, cause vibrations or a sudden drop in RPM's, or increase your fuel consumption.

CAUTION: When replacing propellers, make sure you stay within the engine manufacturer's maximum and minimum RPM ranges. This information is in your engine owner's manual. If your boat does not have a tachometer, consult your dealer for propeller changes.

Cavitation occurs in all propeller driven boats under certain conditions. It is easily recognized by sudden increases in RPM's (revving) or a sudden drop in speed. This occurs when cavities, or air pockets, form around the propeller. Cavitation is influenced by propeller design, speed, placement and even water temperature. In most cases, a change in the drive angle (trim) will correct the problem. If the problem persists, you will need to experiment with different size propellers.

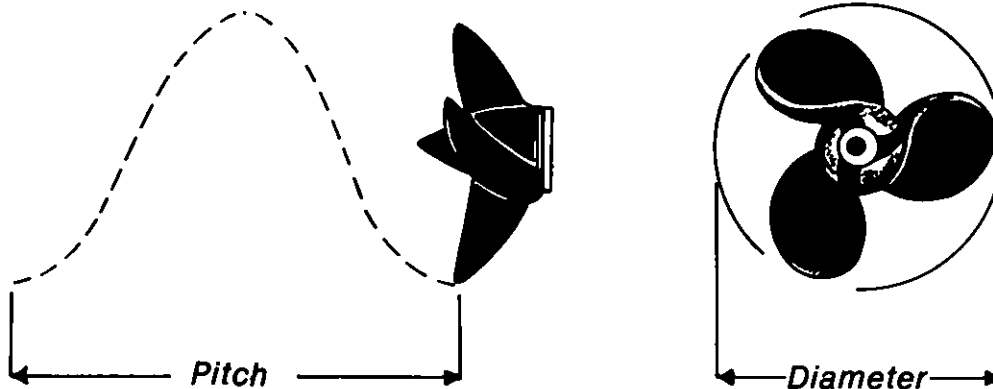


Trailerding


The adjustment and balance of your boat on your trailer largely determines the trailerability of your boat. Swaying while trailerding is usually caused by a tail-heavy load. A rule of thumb is that the tongue weight on the hitch ball should be between 5-10% of the total weight of your boat, motor and trailer. The rollers and/or bunkers of your trailer should be adjusted so that the weight is distributed evenly across the stern and forward throughout the keel section. Your dealer should be responsible for adjusting your trailer properly.

Check the following prior to trailerding your boat:

1. Hitch tight and secure.
2. All nuts and bolts securely tightened and the safety chain properly secured.
3. Winchlocks and tilt mechanism in correct positions.
4. Tires properly inflated and in good condition (including spare).
5. Signal, stop and other lights operating properly.
6. Gear on boat properly secured for travel.
7. Tie down straps are secure.
8. Wheel bearings properly greased (each year).
9. All cabin windows and doors secured.
10. All canvas tops, side curtains are taken down and secured to prevent wind damage/loss in transit.
11. All lines are properly secured.
12. Mooring cover removed. (Damage to canvas during transit is not covered in warranty).

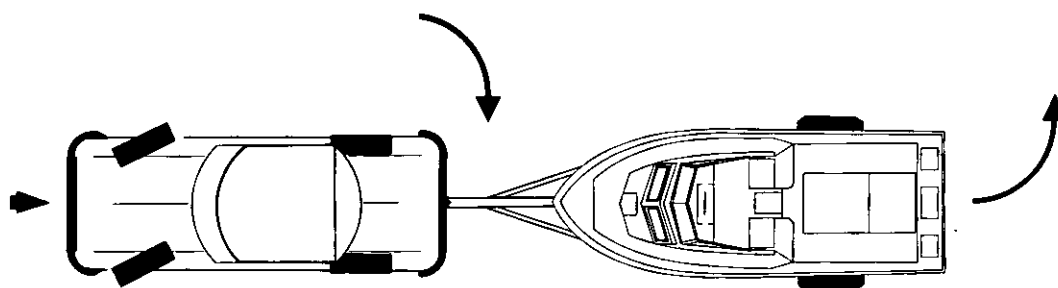

Backing to right

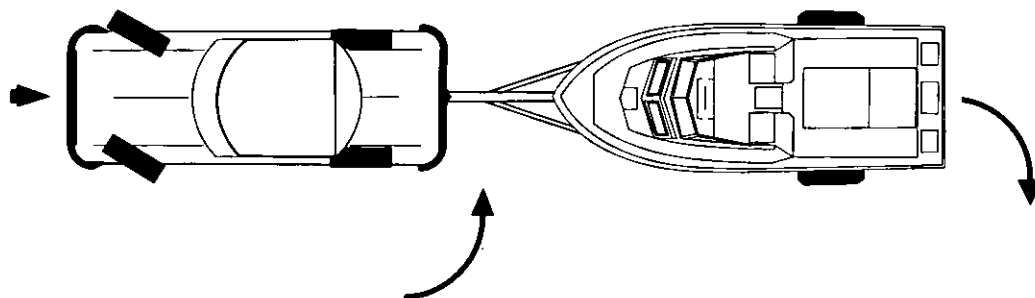

Backing to left

Pre-Launch Check List

Prior to initial launch, familiarize yourself with all aspects of your boat included in this manual. At the launch, go through a pre-launch check list. The check list should be suited to your particular needs but the following items should be included:

1. Make sure drain plug is in place.
2. Have a launch rope attached.
3. Have the proper safety equipment on board.
4. Check the capacity plate and do not exceed capacity ratings.
5. Tilt engine or drive unit to "up" position.
6. Remove tie down strap.
7. Make sure engine drain plug and freeze plugs are closed.

After the pre-launch check, back your trailer slowly into the water preferably keeping the axle hubs above water (unless your trailer is a submersible model). Set the hand brake of your car and place chocks under the rear wheels if chocks are available. Attach a bow line securely to the boat, release the winch cable and give the boat a firm push to roll it off the trailer.

After the boat is clear of the trailer and secured to the dock, move the trailer to the parking area.

Pre-Start Check List

Before starting your engine, check the following:

1. Check the bilge for excess water and leaks.
2. Turn on the bilge pump to remove any excess water, leave the pump on stand-by.
3. On stern drives, turn on the bilge blower and check for leaking fuel or fumes. Run the blower for at least 4 minutes prior to starting.
4. Check engine oil level, battery cable connections, electrolyte level, and all drive belts for proper wear and tension. Check steering for freedom of movement and tightness. Check navigation lights.

Starting

1. Lower the drive unit to the "down" position. Be sure the propeller is free of any obstruction.
2. Set the control lever in the neutral position. Engage the neutral lock out button in the control handle and pump the control throttle forward 2 or 3 times. Set control throttle slightly forward of straight up and turn the ignition key to start. Adjust the throttle to 1200 RPM's and check instruments. If the oil pressure gauge does not respond immediately, shut off engine. If the oil pressure is normal, check the engine area again for fumes or leakage. Test steering response and throttle response at the dock.


Performance

Keep your hull clean for maximum performance. Detailed recommendations for hull cleaning are included in the MAINTENANCE section.

Stern drive models and many outboard models are equipped with power tilt and trim mechanisms. The purpose of the tilt is to raise the engine for launching, loading or trailering your boat.

Trim refers both to the weight distributions inside the boat and to the angle of thrust of the drive unit. The proper weight distributions of passengers and gear can affect performance. The angle of thrust of the drive unit either forces the bow up or down. A drive unit trimmed too far in (forward) will cause the bow to nose downward or "plow". A drive unit trimmed too far out (aft) will cause the bow to ride too high. Adjust the trim so that the angle of thrust is parallel to the water at full throttle at a normal running attitude.

When the angle of thrust is too far out (aft), the engine noise may rise indicating that the propeller is cavitating. Trim the engine in (forward) to correct the problem. The boat may also tend to "porpoise" in maximum bow up position as well. This can be corrected by trimming the bow down by adjusting the engine in.

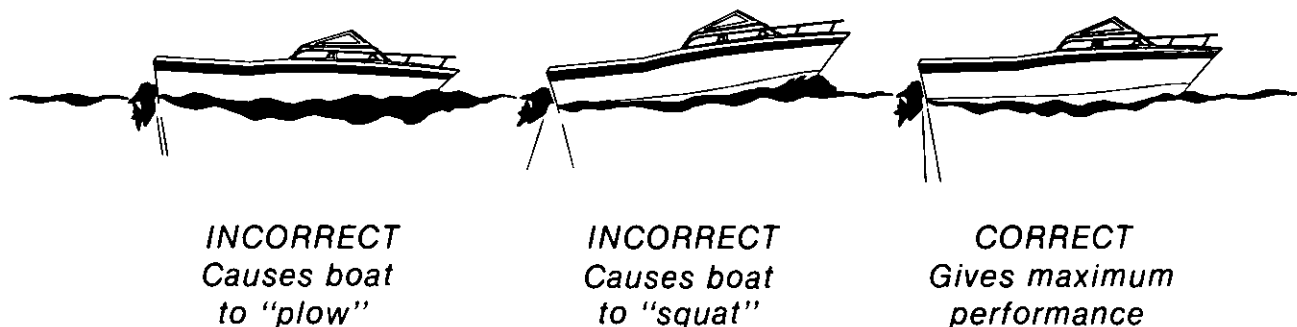

When running into heavy seas, the bow should be adjusted so that the entry point into the water is slightly forward of the helm location for a smoother ride. When running in a following sea, the bow should be trimmed up higher to prevent the boat from plowing into the seas.

As sea conditions change, experiment with the trim to find the best performance for your particular boat and load.


Very Important!

Most drive units are equipped with an adjustable rudder trim tab. This trim tab should be adjusted to balance the steering at the speed which you most often travel. Variations in speed or boat load or changes in the drive unit trim will cause the steering to pull in one direction. If the boat pulls to the left, adjust the trim tab to the left and vice versa.

Anchoring

The size of your boat and the type of lake, sea or river bottom in your boating area should determine the size and type of anchor. The recommended anchor line length is 4 to 7 times the depth of the water. In strong winds and currents, this length should be increased.

A 3 to 4 foot length of chain between the anchor and the anchor line will help prevent the line from chaffing on rough obstacles below the surface and will also help hold anchor arm down for more secure anchoring.

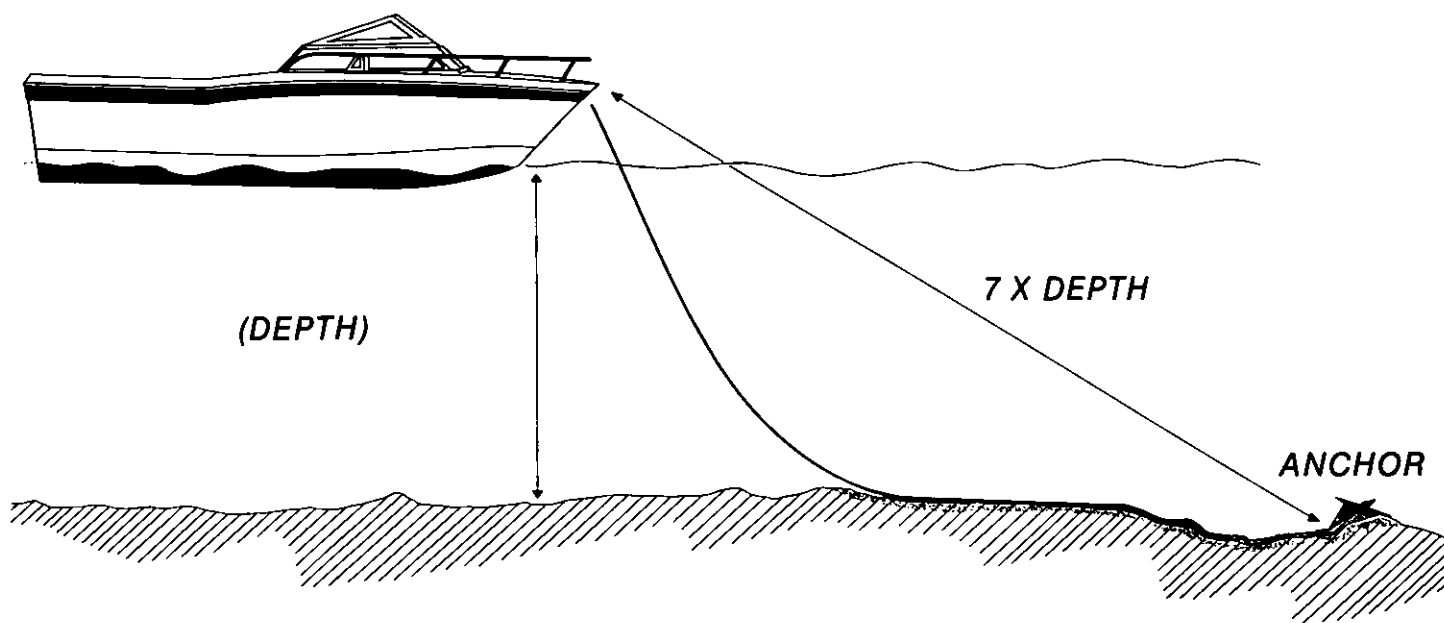

To anchor, head the boat into the wind or current, stopping forward motion. Make sure your anchor line is secured to a cleat and travels under the bow rail. Lower the anchor into the water until it reaches bottom. Feed out anchor line slowly as the wind or current forces the boat backward. If necessary reverse your engine. Before shutting down engines, make sure the anchor is secure.

To raise anchor, reverse the procedure by driving the boat slowly to the point directly above the anchor and pull straight up. If the anchor is difficult to raise, you may tie off the anchor line when directly over the anchor and slowly motor forward to "free" the anchor from the bottom.

Your boat will swing at anchor with the wind, so do not anchor close to other boats or objects. Also, remember that it is illegal to tie up to navigational aids such as buoys and markers.

WARNING: Never anchor off the stern of the boat, especially in strong winds or currents. The weight of the stern and flat surface to the seas can easily cause water to enter over the transom, swamping the boat.




Docking

Unlike an automobile, the stern of your boat reacts first when turning. A turn to the right will swing the stern to the left and vice versa. Remember that turning your boat away from an object such as a dock will tend to swing the stern toward that object. Before bringing your boat to the dock, consider the wind and how it may be used to your advantage. Approach the dock at a 30 to 45 degree angle at a slow speed. Before the bow reaches the dock, shift the engine to neutral, turn the steering wheel toward the dock and shift the engine into reverse. The boat will slow and the stern will swing toward the dock.

When pulling away from the dock, make sure you have enough room to maneuver before turning by pushing the stern clear. You can then ease away without bumping the stern against the dock.

Slowing and stopping your boat requires some practice. As you slow the throttle, the boat will slow down. The length of time to come to a complete stop will vary with wind and current. In addition, the judgement of distance and momentum on the water is a skill that improves greatly with practice.

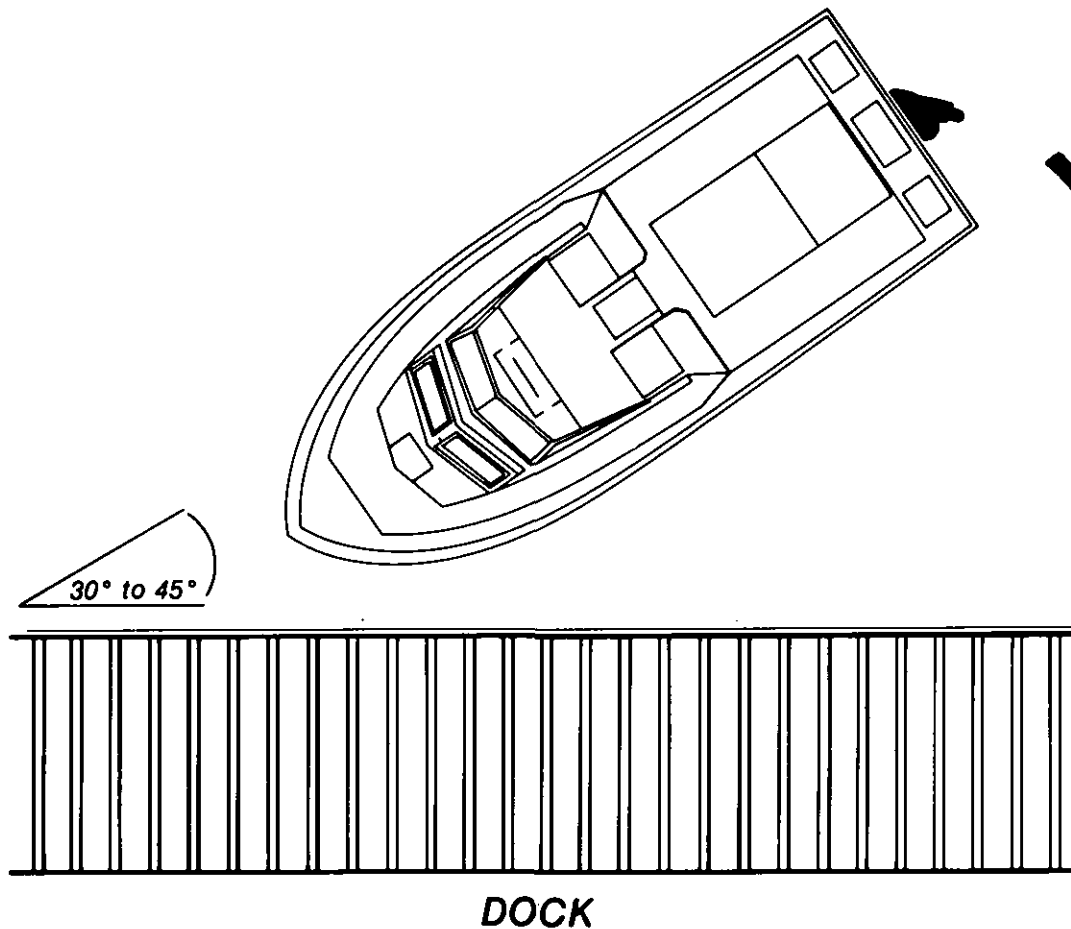



Maintenance and Service

Proper maintenance of your boat is not only a source of pride but is the key to maintaining your boat's value. A few simple steps will keep your fiberglass Grady-White looking showroom bright for years.

Your hull and deck are constructed by the hand lay-up method using the highest quality fiberglass mat and woven roving. This method of construction insures a proper fiberglass-to-resin ratio and a uniform thickness which together result in a much stronger boat than those constructed of "chopped glass". This is an expensive process, but insures you that your Grady-White is the strongest, most durable fiberglass boat possible.

Fiberglass Finish

The outer skin, or gel coat, of your Grady-White is a thin layer of resin with the finished color pigment. It is an integral part of the hull laminate. This tough, durable outer layer makes routine maintenance relatively simple.

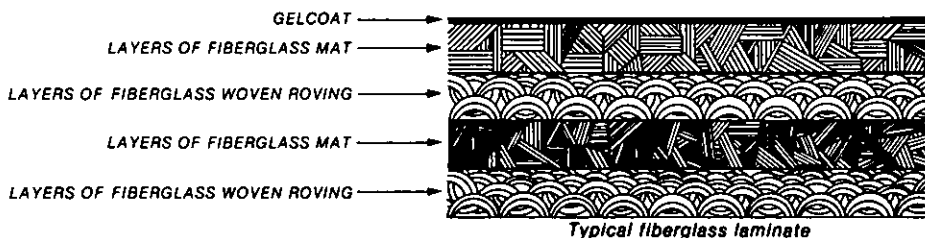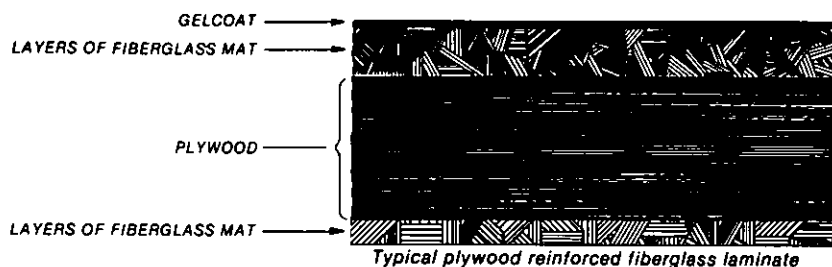

The gelcoat of your Grady-White is the finest available. The best method of routine upkeep, is almost like maintaining the finish of an automobile. The best method of cleaning the boat is with a mild household detergent and plenty of fresh water. A good coat of wax (either automobile or boat wax will do) will maintain the smooth, glossy finish and protect the boat's surface. Do not wax surfaces that may be walked on, however, as they will become quite slippery when wet.

Though gelcoat is a very durable material, it can still be subject to small spider web-like cracks (crazing), scratches and blistering over years of use. It is elastic enough, however, to withstand strong blows while flexing with the hull's movement. Gelcoat problems are cosmetic and will not effect the structural integrity of your boat.

If you store your boat in the water for more than a few days at a time, the bottom of the boat below the waterline should be painted with anti-fouling paint to protect it from marine growth, barnacles and blistering which inhibit performance.

Anti-fouling paint slowly dissolves to prevent marine growth so inspection and cleaning of the boat bottom at least once per season is advisable. Repaint when ever necessary.

Gelcoat Repair

Many gelcoat imperfections can be repaired using the following procedure:

1. Obtain the original colored gelcoat from your dealer and a small amount of M.E.K. (catalyst) which when mixed with the gelcoat, will cause it to harden. You may also wish to obtain a little acetone which is the most suitable cleaning agent for gelcoat.

WARNING! M.E.K. (Methyl ethyl ketone peroxide), gelcoat and acetone are flammable and hazardous if not handled properly. Follow instructions on the containers carefully. After gelcoat is catalyzed, it may become hot in the mixing container and catch on fire. Submerge remaining gelcoat in water until cool before disposal.



2. If the surface to be repaired is flat, lightly sand this surface (removing all glossy areas) so that the new gelcoat will adhere to the surface. If the area to be repaired is cracked, the crack should be routed out with a small instrument. Any crack extending past the gelcoat surface and into the fiberglass would need a more extensive repair. We suggest you consult your dealer for additional instructions. Tape off all adjacent areas around the damaged area.

3. A small amount of gelcoat should be tested with the catalyst before mixing the material for your repair. You will then be able to understand how the chemicals react. Pour approximately 1/2" of gelcoat into a small cup and add approximately 1.5% M.E.K. (about 3 to 5 drops) and stir thoroughly. Spread a small amount of the mixture on a test surface and measure the time it takes to harden. Hardening time should be from 15 to 45 minutes. Too little M.E.K. will lengthen the hardening time. Too much M.E.K. will cause the patch to become rubbery and it will not cure properly. It is best to be under catalyzed. When you obtain the proper mixture in a test, you are ready to mix a new batch for the actual repair, using the same ratio of M.E.K. to gelcoat.

4. Apply to the defective area using a small stick (a medical tongue depressor or popsicle stick works well). The mixture should be applied in a thin layer, bringing the patch up to the level of the original surface. Too much material will require extra sanding.

5. When the patch is hard, any raised area should be sanded carefully with 220 grit sandpaper bringing it near level with the original surface. Use 400 or 600 grit sandpaper which has been wettened with water as you approach the finished surface. The water will reduce scratching. Wrapping the sandpaper around a small block of wood will help keep the area being sanded level.

6. Remove the tape around the patch and sand with 600 grit until the patch is level with the original surface. You will notice that the repaired area has a dull finish. Any good automotive buffing compound applied with a power buffer will bring a lustre to the surface.

Interior Maintenance

Your interior vinyl upholstery may be cleaned with a mild solution of household detergent and fresh water. Also, commercially available cleaners for vinyl work well. Just follow the instructions.

As the seams of your upholstery are not water proof, your upholstery should be stored in the cabin or covered when not in use.

Some cabin cushions are of a Herculon-type fabric and may be cleaned with upholstery cleaner. Most cabin cushions are removable and may be dry cleaned. Do not machine-wash these fabrics.

Canvas

Follow these steps to maintain your boat's top and other canvas:

1. Dry all canvas before storing to prevent mildew.
2. Wash canvas periodically with a heavy-duty detergent and warm water. Do not use petroleum-based or ammonia cleaners on canvas or clear vinyl as they will yellow.
3. Lubricate the snap buttons and zippers with petroleum jelly or paraffin and they will be much easier to operate efficiently.
4. Clean clear vinyl thoroughly with denatured alcohol then apply a protective layer of clear wax. Do not use paste wax as it will yellow vinyl. This process should be repeated as necessary to maintain the protective wax coating.
5. The top front and side panels must be removed and rolled up for storage. DO NOT FOLD THESE PIECES UP IN THE BOOT. This procedure is necessary to prevent the front and side vinyl pieces from cracking.
6. Never trailer your boat with the canvas up. All canvas should be stored and secured before trailering.

Though your Grady-White boat's canvas is made using the highest quality vinyl and latest sewing techniques, your boat is basically an "open" vessel and your boat's canvas will not be completely leak proof. The seam holes in your canvas may stretch and tend to leak water. However, you can correct much of this problem by rubbing paraffin over the seams.

Please understand that Grady-White does not warrant the fit and design of the canvas to be completely watertight.

Teak

Teak is used in many Grady-Whites because of its beauty and low maintenance. Richly supplied with natural oils, teak weathers well. But, without protection, after repeated exposure the teak will weather. One of two things may be done to return the teak back to its natural color. If your teak is slightly weathered, it may be cleaned with detergent or a commercial teak cleaner and then oiled with a lemon based furniture polish. If the teak is severely weathered, then you may need to sand it down until all the gray is removed. Then rub in three to four coats of tung oil, allowing each coat to dry thoroughly. Once your basecoat is dry, all you need to do to protect your teak is apply the lemon-based furniture polish when cleaning up your boat after each use.

Hardware

Even though your hardware is made of laboratory grade 316 stainless steel, it does need regular cleaning to maintain its "less staining" properties. Use a mild solution of soap and water to clean your stainless after using your boat. If a bit more "kick" is needed, add a small amount of vinegar to the solution. Stains and discoloration may be removed with a non-abrasive metal cleaner.

You should not try to remove stainless steel stain with an acidic solution such as a household cleaner. In fact, where acid rain is a problem, you should rinse your boat with fresh water after it rains.

The real key to maintaining your stainless steel is to keep it clean. So try to remove all salt or dirt from your stainless on a regular basis. Also, remember to rinse your hinges on baitwells and fishboxes regularly too. Hinges may need a small amount of penetrating oil as a regular part of your maintenance program.

Hardware Mounting

When drilling mounting holes in boat surfaces, be sure each hole is well sealed. Sealing will prevent water leakage, which is especially important in fiberglass areas that have been reinforced with plywood. Improperly sealed holes risk trapping water inside the fiberglass and saturating the plywood reinforcement.

Battery


No matter what type of power your boat uses, your battery(ies) are extremely important. They should be covered and secured in position in a non-metallic tray to prevent spilling electrolyte. Make sure the battery is properly secured for running.

Check the fluid level in each battery cell at least once a month. Fill the battery with distilled water to the upper level as shown in the illustration. Never overfill the battery.

Keep terminals clean by scrubbing with a mixture of baking soda and water using a stiff brush. Then apply a light coat of grease. Do not let any of the baking soda/water mixture enter the battery.

Check the battery every month when not in use by using a battery hydrometer which measures the specific gravity. The meter should read between 1250 and 1280.

Never disconnect the battery when the engine is running as damage to the charging system could result.

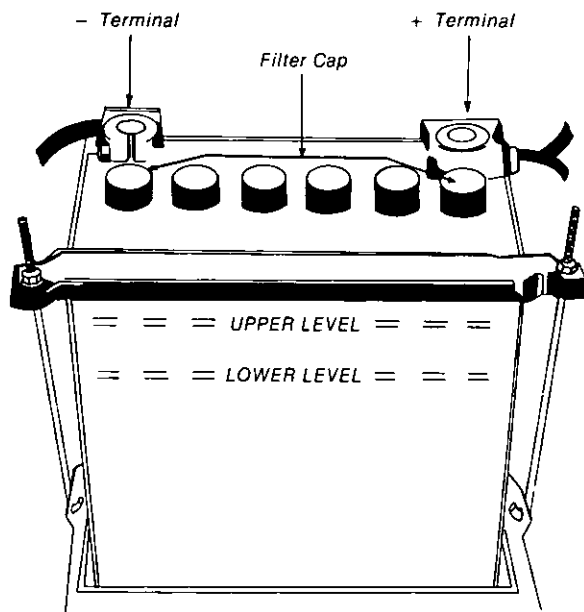

The battery contains sulfuric acid. Avoid contact with skin, eyes or clothing. Antidote: EXTERNAL — Flush with water. INTERNAL — Drink large quantities of water or milk. Follow with milk of magnesia, beaten egg or vegetable oil. Call physician immediately. Eyes: Flush with water and get prompt medical attention. Batteries produce explosive gases. Keep sparks, flame, cigarettes away. Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries.

KEEP OUT OF REACH OF CHILDREN.

Remember when disconnecting and reconnecting battery cables that the black cable must be connected to the negative terminal and that the red cable must be connected to the positive terminal of the battery. Reversing this procedure will immediately damage your system.

Scuppers

Most Grady-White boats have self-bailing cockpits, meaning that water on the cockpit floor drains through overboard drains rather than into the bilge. The stern drains (scuppers) have an external scupper flap assembly (as shown below) which restricts the flow of water back into the boat through the scupper system. Inspect the flaps periodically to make sure that they are free of debris. The scupper flaps will need periodic replacement.



Rigging Compartments

The 230/232G Gulfstream series has a rigging compartment located aft of the gas tank compartment. This compartment is functional for rigging oil tanks or ignition protected pumps. As of January 1987, a sub-floor is installed at a height that will allow easier access to the oil tank filler caps through the six inch inspection port. There is enough clearance for a remote oil filler hook-up between the liner floor and the top of the tank. **WARNING!** Note that this compartment is not to be used for batteries, portable fuel tanks, or fuel filters as this compartment does not have approved ventilation.

The rigging hatch and mounting screws must be sealed with silicone sealer after rigging is complete. If the lid is removed it must be resealed to insure watertight integrity.

Engine

If your Grady-White is powered by a stern drive engine, refer to the engine manufacturer's manual for proper maintenance procedures. Complete the engine warranty card at the time of purchase and forward it to the manufacturer.

If your boat is outboard-powered, your dealer should provide an outboard owner's manual to help you with routine maintenance.

Grady Drives

Located on the aft side of the Grady Drive, just above the splash plate is a sacrificial anode. This anode should be checked frequently and replaced as necessary.

There is an independent foam core in the Grady Drive. Since there is chance of moisture entering the bracket, a drain has been provided. Any moisture entering from the top of the bracket should drain to the bottom of the bracket. The drain plug should be removed periodically to drain the bracket.

The Grady Drive is made of cast aluminum (almag); therefore, it is very important to use an appropriate type of bottom paint. Consult your bottom paint dealer for advice on what type of paint to use.

Storage

If your boat is out of use for the winter, special attention should be paid to areas that may be damaged by freezing temperatures. Even if you live in a warm climate, you should inspect your boat on an annual basis.

Use the following check list for winter storage:

1. There are detailed instructions in your engine's owners manual regarding the procedures to be followed in winterizing the engine. Follow these important instructions carefully and your engine will survive the most severe weather conditions.
2. Clean and wax your boat before storage. If you stored your boat in the water, there may be a layer of growth on the bottom in addition to the anti-fouling paint. This debris will harden on the boat bottom as it dries so scrub the bottom immediately after the boat is removed from the water.
3. If you are storing your boat on a trailer or cradle, make sure that they fully support the keel, chines and under the transom.
4. Raise and block the trailer axle to prevent tire deterioration. This is an excellent time to lubricate and pack the wheel bearings per manufacturers' instructions.
5. Remove the bilge drain plug, and open all valves and seacocks to keep the bilge dry. Drain all tanks, water lines and pumps to prevent freeze damage. If desired, the fresh water system may have a nontoxic anti-freeze put in it. This antifreeze can be purchased at most marine dealerships or camping dealers. In warmer climates, draining will help prevent water stagnation. Store your boat with the bow elevated to help drainage.
6. If you are sure your fuel does not contain alcohol, keep your fuel tanks full during storage or periods of infrequent use to prevent condensation of water vapor and subsequent engine malfunction. Also, there are additives available to inhibit condensation. Alcohol containing fuels absorb humidity and this condensation will separate from the fuel as the temperature drops during winter months, causing corrosion. Fuel tanks should be empty during storage if fuel contains alcohol. This is also a good time to have your fuel filters changed if they haven't been changed for awhile.
7. Check the electrolyte level in your battery and give it a good charge before storing. A strong battery loses its charge much more slowly than a weak battery. Ideally, you should disconnect the batteries and remove them from the boat. Clean the posts and cover the terminal posts with some sort of grease to prevent any corrosion. Then store the battery in a dry cool area on a wood board. Don't store your battery on concrete as the cold, moist surface will drain the battery.
8. Cabin cushions and other cushions should be taken indoors for dry storage when possible to prevent mildew.
9. Pull all your electronics and store them inside. Your compass, if built in, should be covered for the winter as ultraviolet rays from the sun will "cloud" the compass and make it difficult to read.
10. Portable heads need to be drained, especially if they are stored in the boat. Remember to drain both the upper and lower tanks. Heads with deck pumpouts should have all water removed from the lines.

Accessory Wiring Color Code and Fuse Sizes


ACCESSORY	WIRE SIZE & COLOR	FUSE AMPS	LOCATION
Bow Light	16 Ga. Gray	15.0	Acc Panel
Aft Pole Light	16 Ga. Gray/Wht Stripe	15.0	Acc Panel
Mast Light (forward bulb)	16 Ga. Gray/Red Stripe	15.0	Acc Panel
Mast Light (aft bulb)	16 Ga. Gray/Blk Stripe	15.0	Acc Panel
Panel Lights	16 Ga. Dark Blue	15.0	Acc Panel
Cabin Lights	16 Ga. Dark Blue/Green Stripe	10.0	Fuse Block
Cockpit Lights	16 Ga. Dark Blue	10.0	Acc Panel
Spreader Lights	16 Ga. Dark Blue/Yellow Strp	10.0	Acc Panel
Bilge Pump (Forward):			
Rule 800	16 Ga. Brwn/Blk Stripe	4.0	Acc Panel
Rule 1500	16 Ga. Brwn/Blk Stripe	7.5	Acc Panel
Auto Float Switch (Fwd)	16 Ga. Brwn/Red Stripe in line		Near Battery
Bilge Pump (Aft):			
Rule 800	16 Ga. Brown	4.0	Acc Panel
Rule 1500	16 Ga. Brown	7.5	Acc Panel
Auto Float Switch (Aft)	16 Ga. Brwn/Wht Stripe in line		Near Battery
Aerator Pump	16 Ga. Org/(2) Brwn Stripes	2.0	Acc Panel
Shower Sump Pump (float switch)	16 Ga. Brwn/Org Stripe	4.0	Fuse Block
Water Pressure Pump (Shower)	16 Ga. Org/Red Stripe	15.0	Acc Panel
Water Pressure Pump	16 Ga. Org/Blue Stripe	2.5	Fuse Block
Washdown & Livewell pump	16 Ga. Org/Brwn Stripe	15.0	Acc Panel
Bilge Blower	16 Ga. Yellow	10.0	Acc Panel
Horn	16 Ga. Org/Wht Stripe	15.0	Acc Panel
Windshield Wiper (actuator)			
Port	16 Ga. Org/Green Stripe	5.0	Acc Panel
Stbd	16 Ga. Org/Blk Stripe	5.0	Acc Panel
Windshield Wiper (position)	16 Ga. Orange		
Windlass Solenoids			
	16 Ga. Org/Purple Stripe	*	Acc Panel
	16 Ga. Org/Yellow Stripe	*	Acc Panel
Windlass Power Lead			
	4 Ga. Red	*	Near Battery
	4 Ga. Black	*	Near Battery
Accessory	16 Ga. Orange	10.0	Acc Panel
Accessory Grounds (Ind)	16 Ga. Black	N/A	
Accessory Grounds Mains	10 Ga. Black	N/A	
Hydraulic Trim Tabs	16 Ga. Harness (Supplied)	20.0	Fuse Block
Main Fuel Tank (Sender)	16 Ga. Pink	2.0	Acc Panel
Aux Fuel Tank (Sender)	16 Ga. Pink/Wht Stripe	2.0	Acc Panel
Port Junction Box	10 Ga. Orange	30.0	Fuse Block
Accessory Panel Power Lead	10 Ga. Red circuit breaker	40.0	Near Battery
Ignition Switch Power Lead	10 Ga./16 Ga. Red in line	20.0	Ignition
Primer Pumps (Port)	16 Ga. Pnk/Red	5.0	Acc Panel
(Stbd)	16 Ga. Pnk/Blue	5.0	Acc Panel
Tilt (OMC Stern Drive)	16 Ga. Purple	6.0	Fuse Block
Trim Junction Box	10 Ga. Red in line	50.0	Near Battery
VHF (Hardtop Radio Box)	10 Ga. Red/Wht in line	20.0	Near Battery


* Refer to windlass manufacturer's recommended fuse & breaker sizes.


Typical Outboard Instrument and Switch Panel Wiring Diagram

NOTE:


1. ALL COMPONENT SYSTEMS ARE NOT INSTALLED ON SOME MODELS. DRAWING APPLIES TO ONLY THOSE ITEMS THAT ARE INSTALLED AND CONNECTED. EXTRA WIRES ARE IN HARNESS FOR DEALER TO INSTALL OTHER LABELED SWITCHES AND ACCESSORIES.
2. FUEL 2-WAY SWITCH ILLUSTRATED FOR BOAT WITH 1 TANK. BOATS WITH 2 TANKS HAVE 3 POSITION SWITCH AS NOTED IN FIG. 1.
3. SOME MODELS HAVE ALL ACCESSORY SWITCHES FUSED AT THE FUSE BLOCK.
4. INDICATOR LIGHTS ARE NOT INSTALLED ON SOME PANELS.

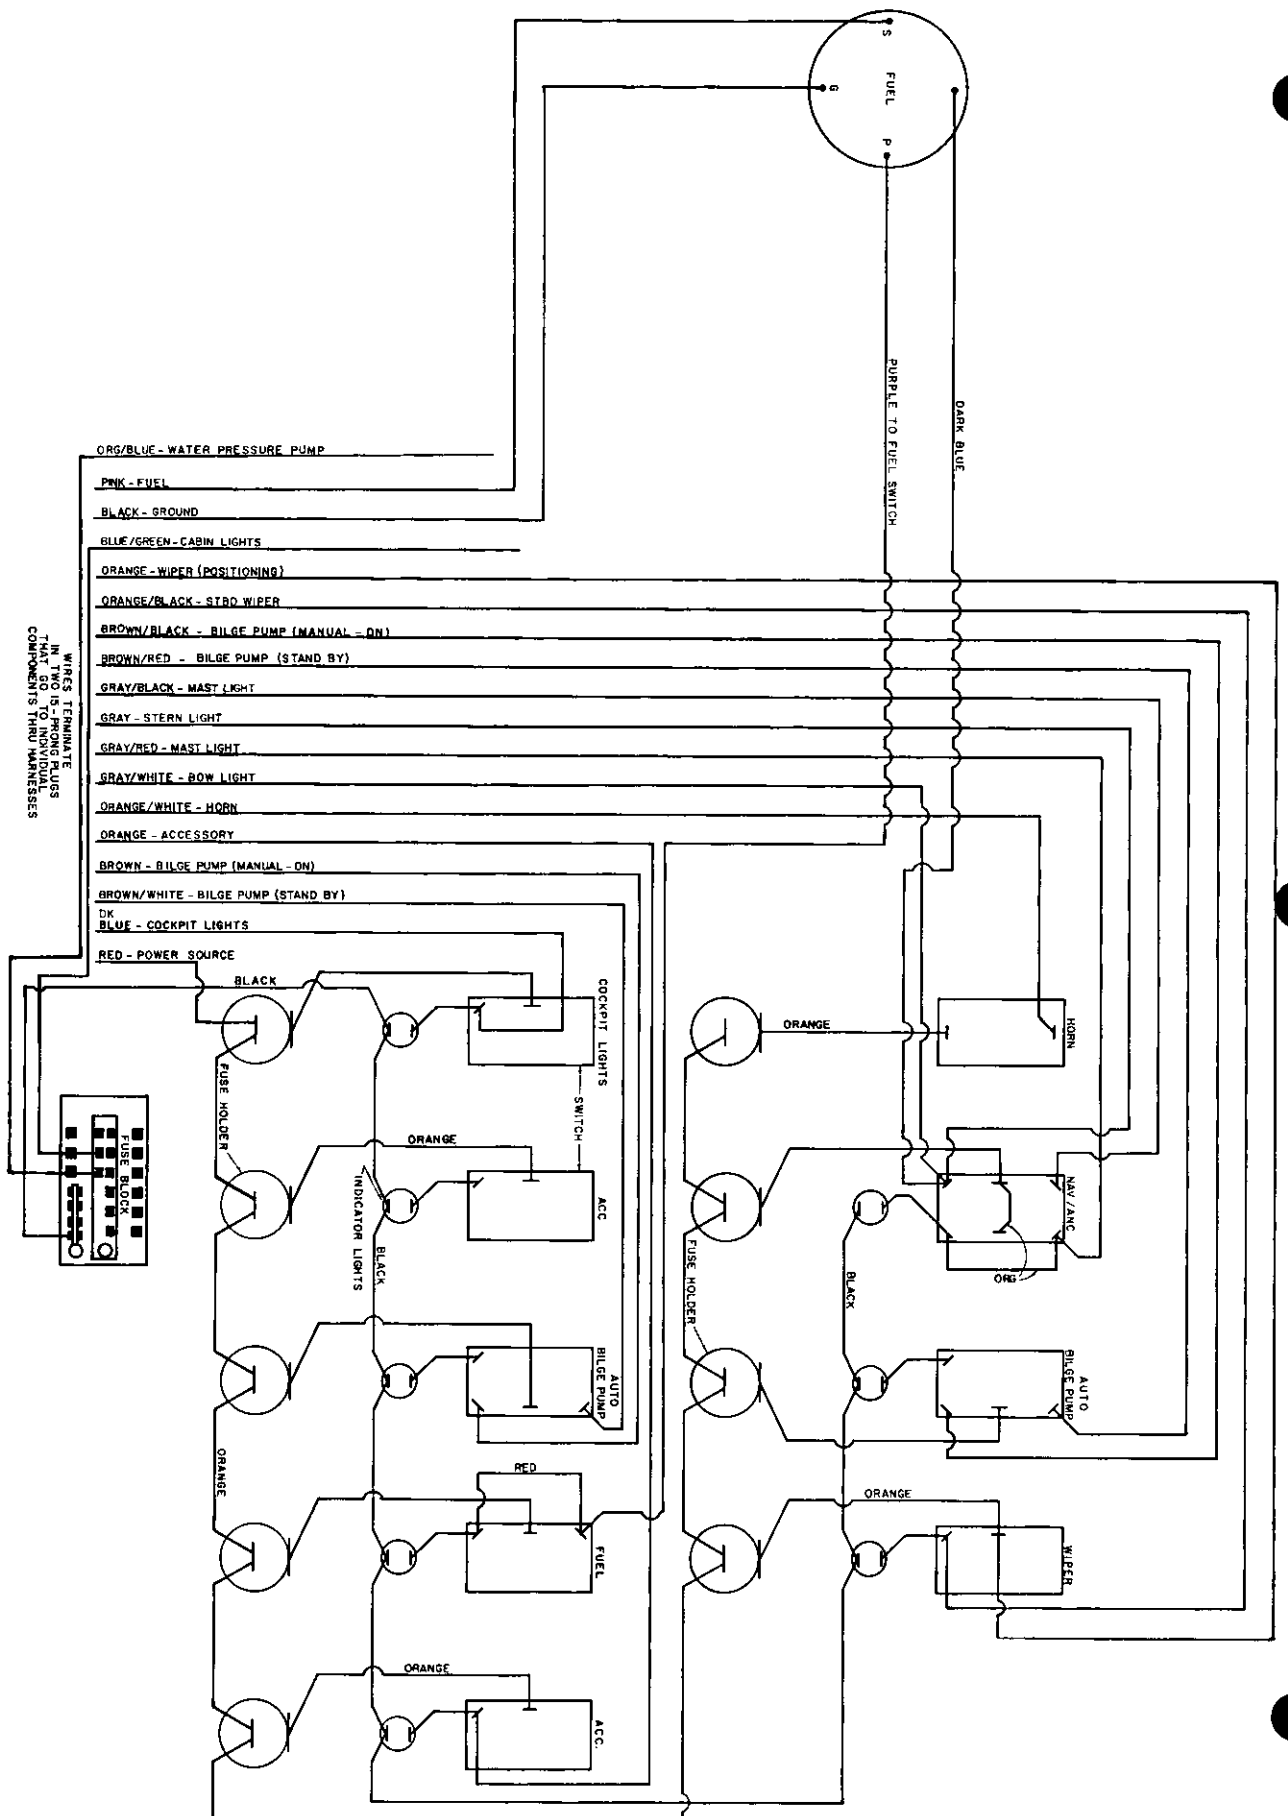


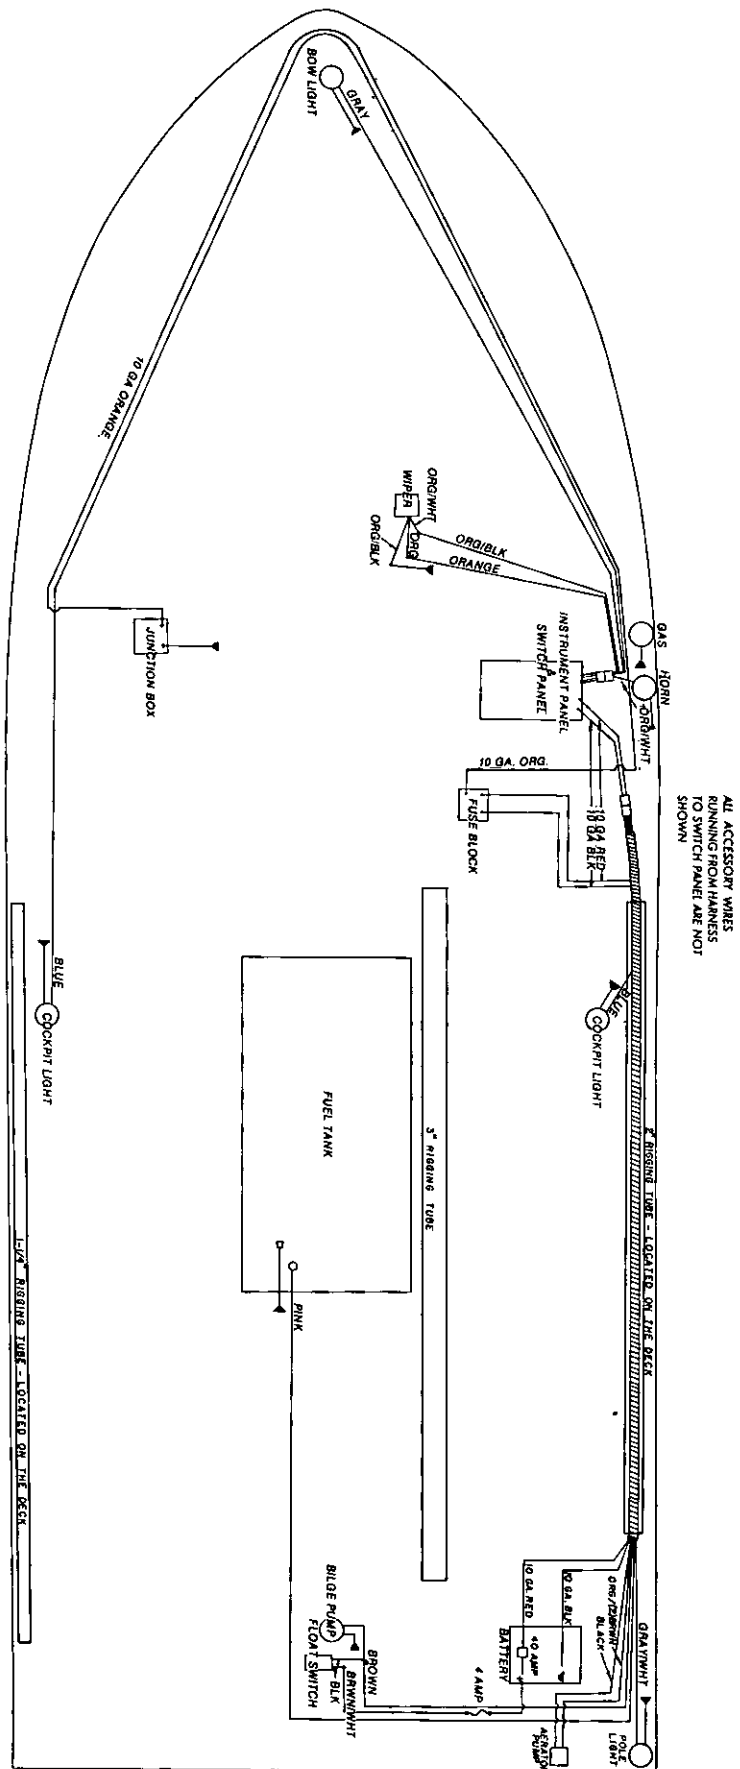

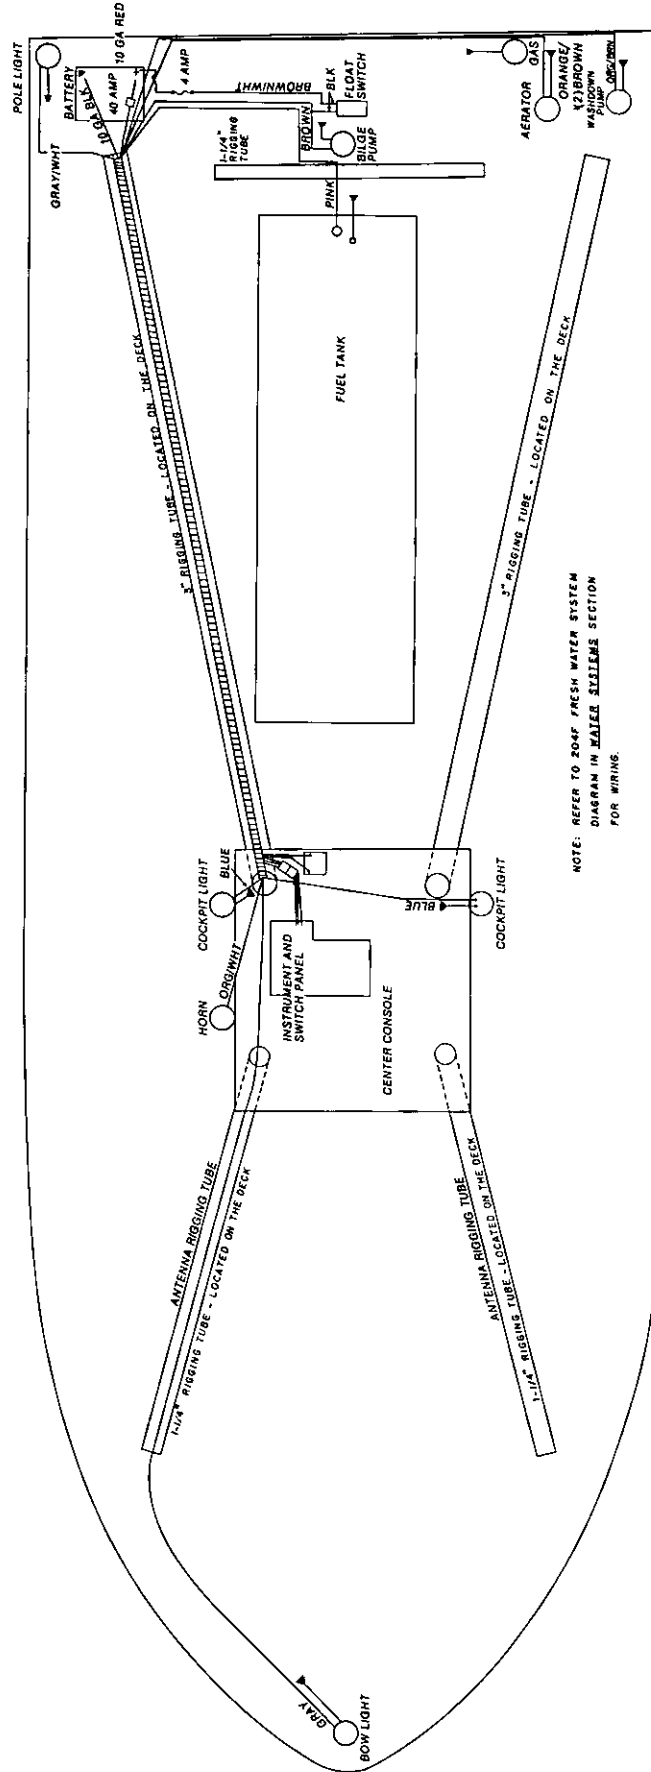



Accessory Wiring Diagram: 204 Fisherman

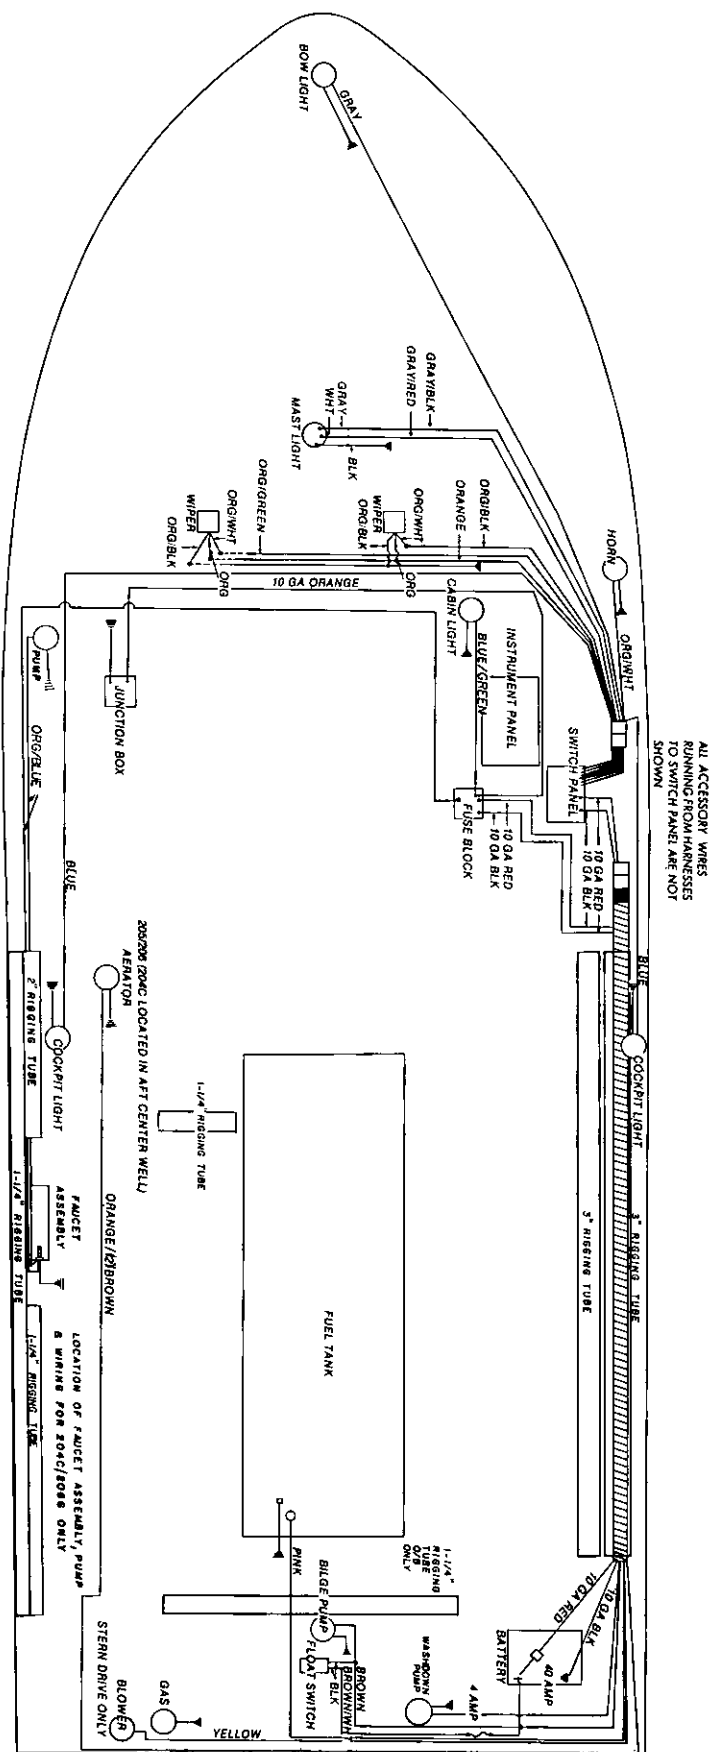

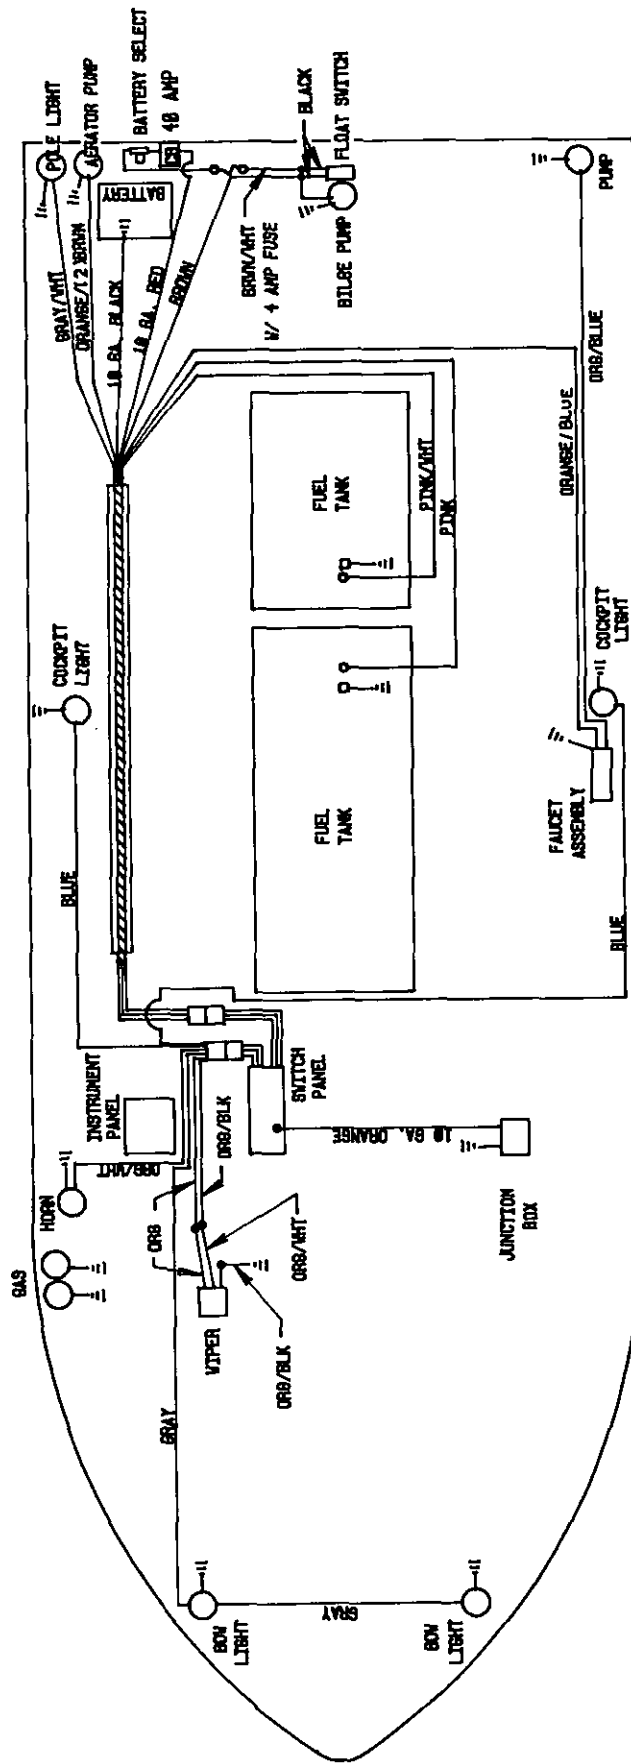



Accessory Wiring Diagram 22' Tournament

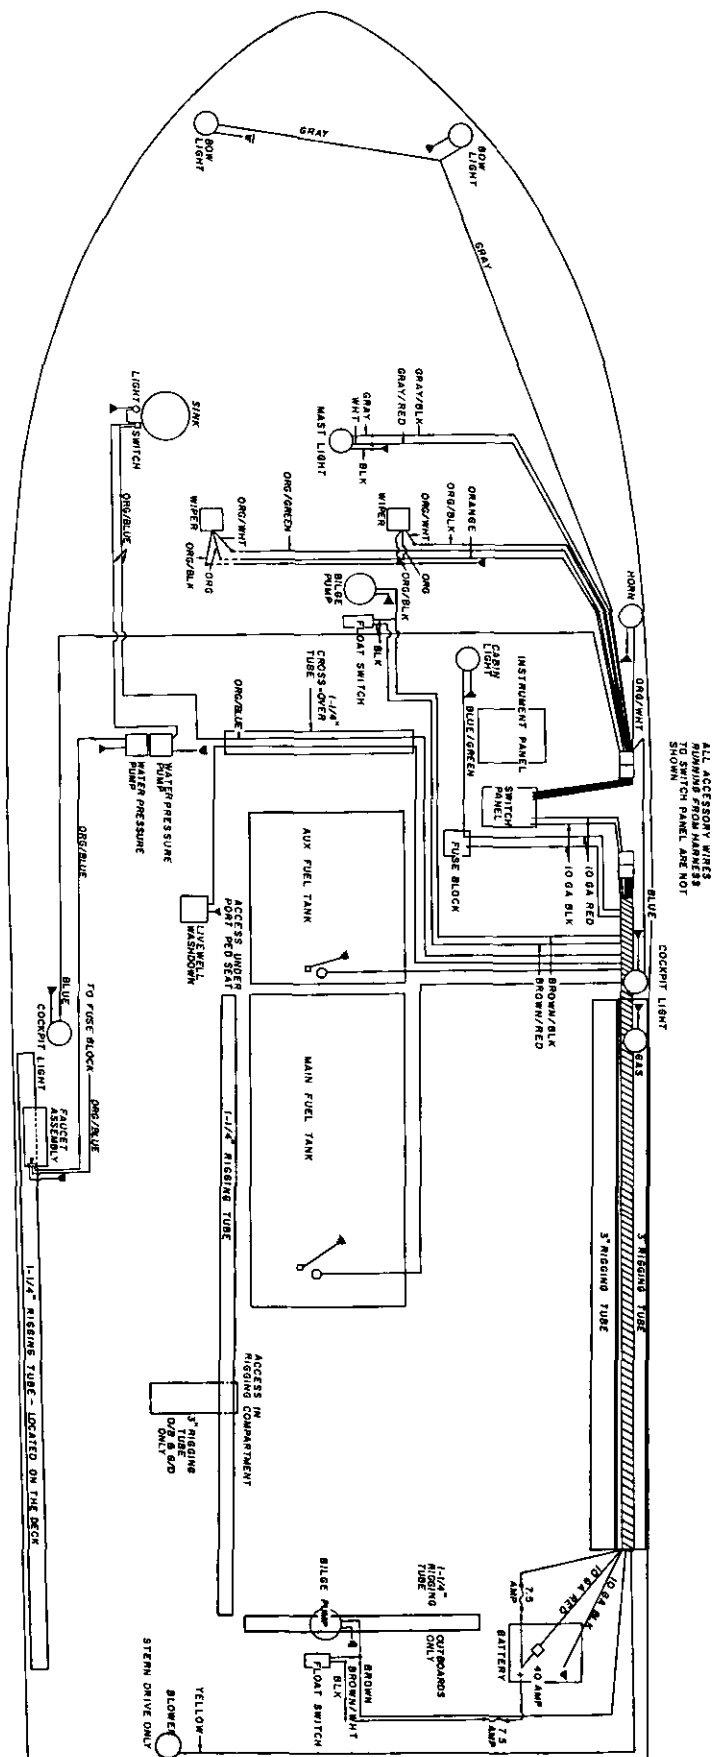

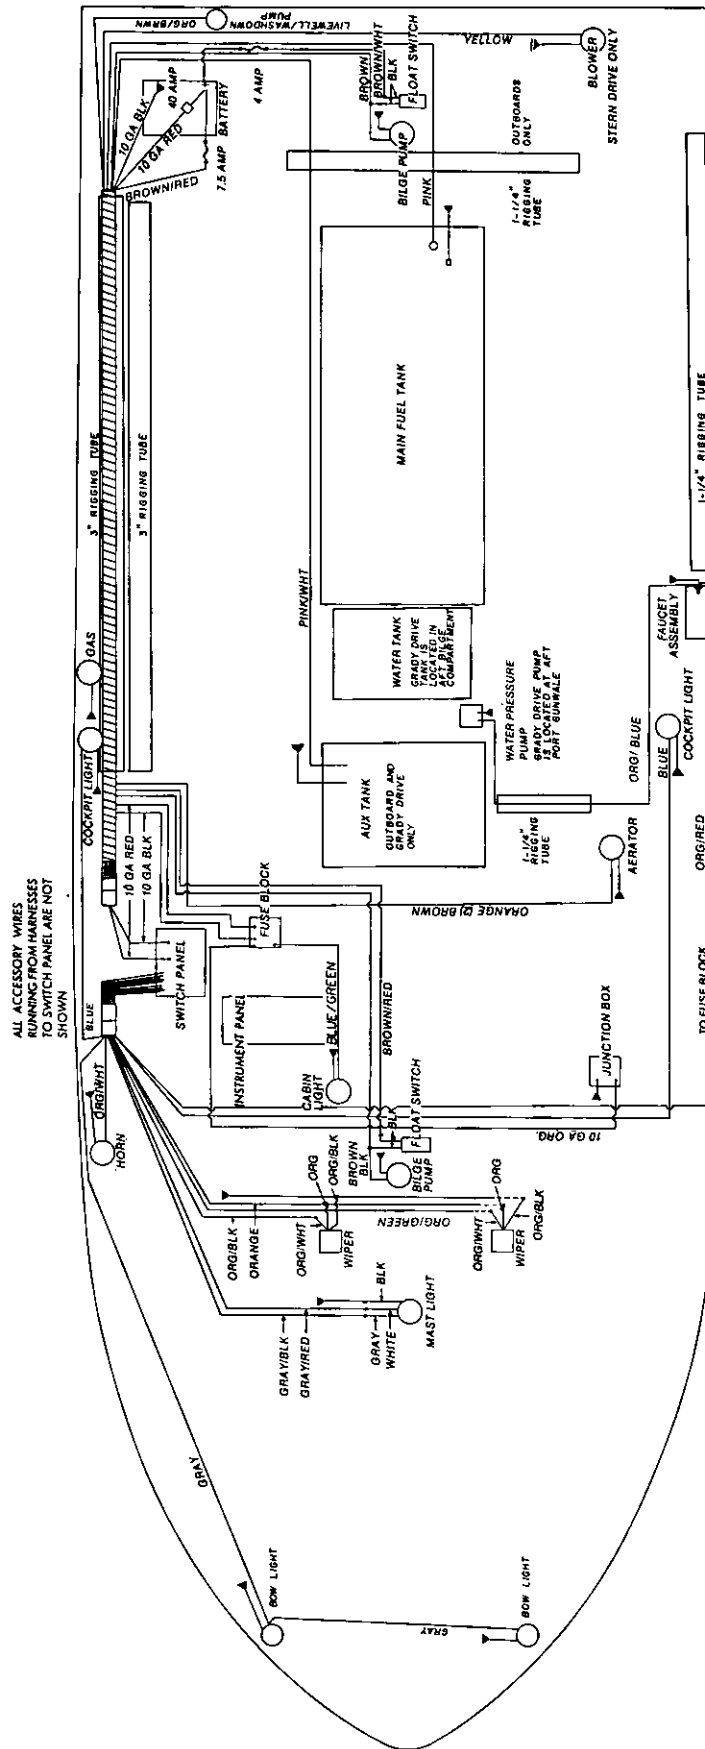


Accessory Wiring Diagram: 22' Seafarer and 24' Offshore Series

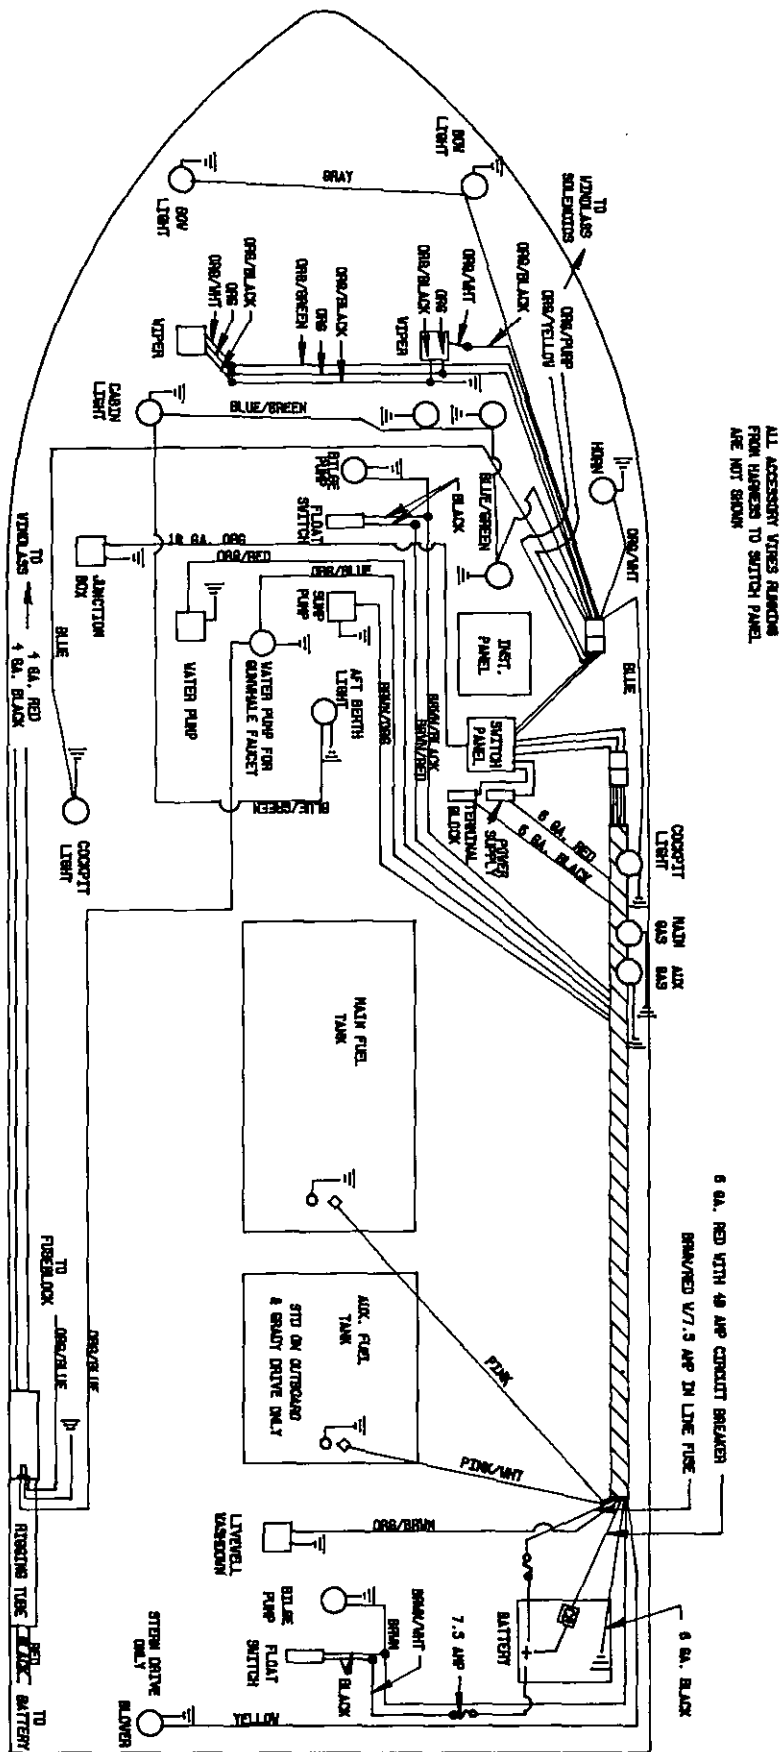


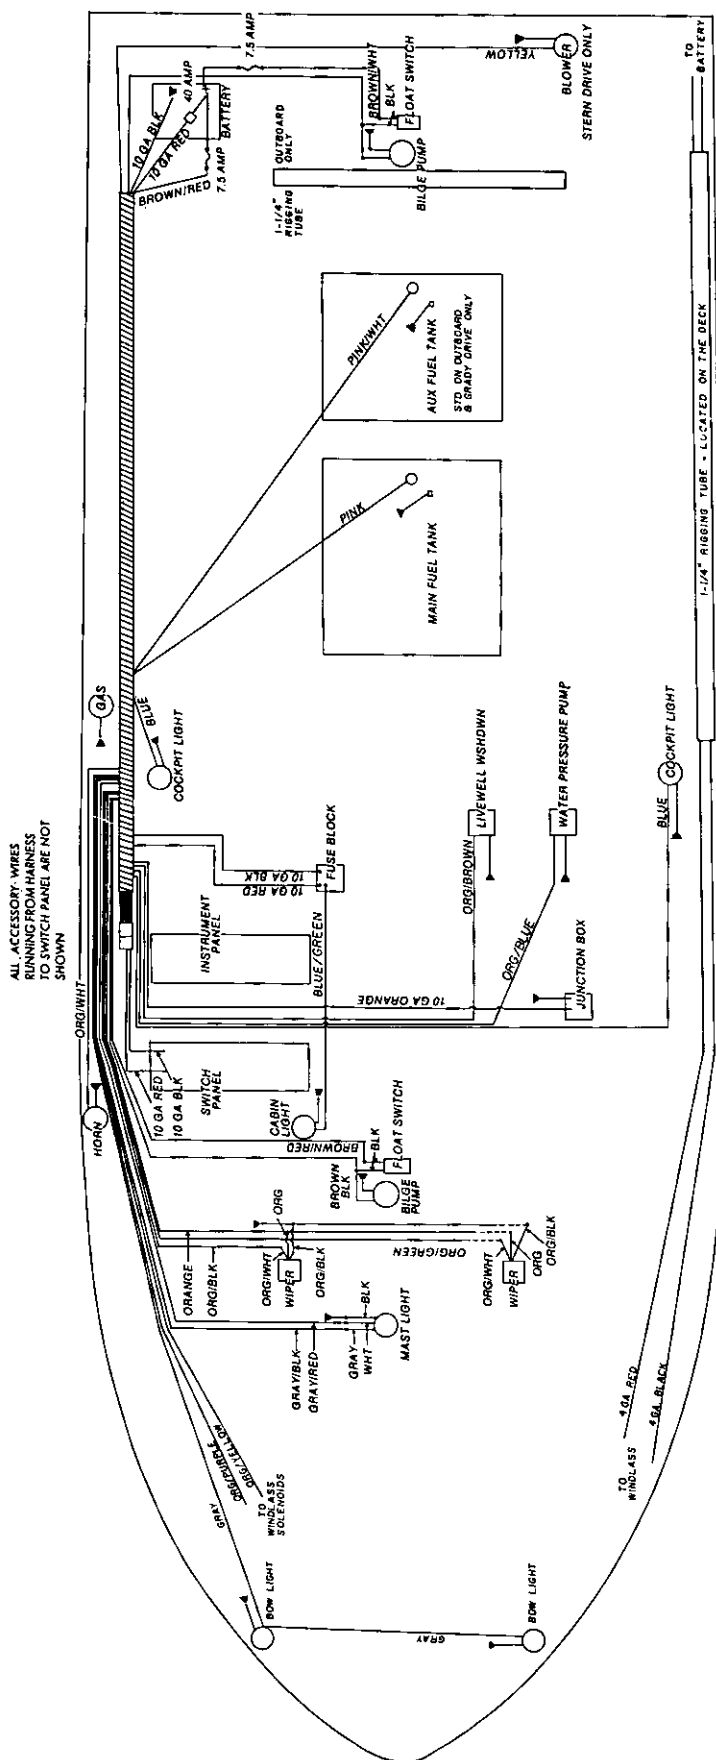

Accessory Wiring Diagram: 25' Trophy Pro Series


Hardtop Wiring Diagram For 25' Sailfish Series

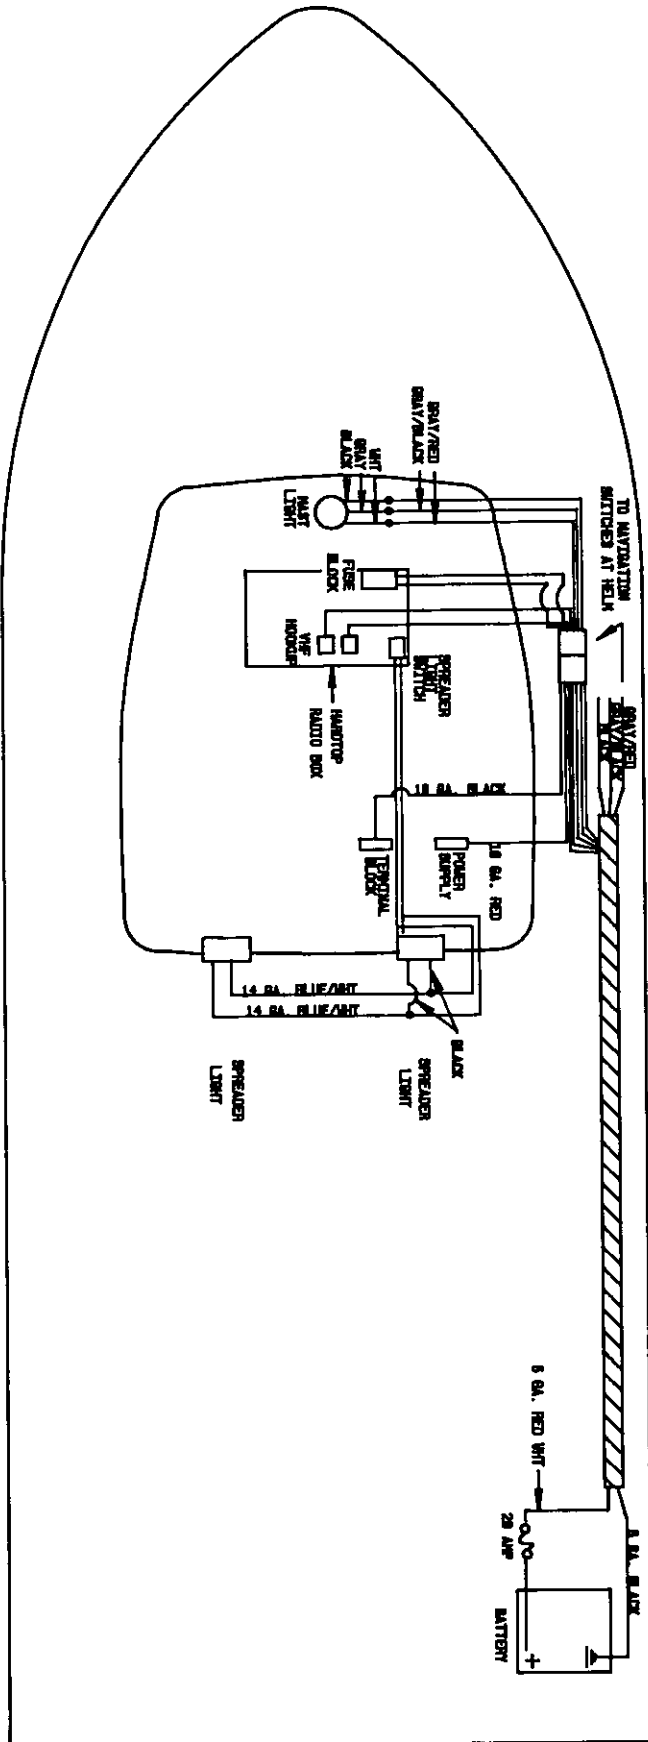

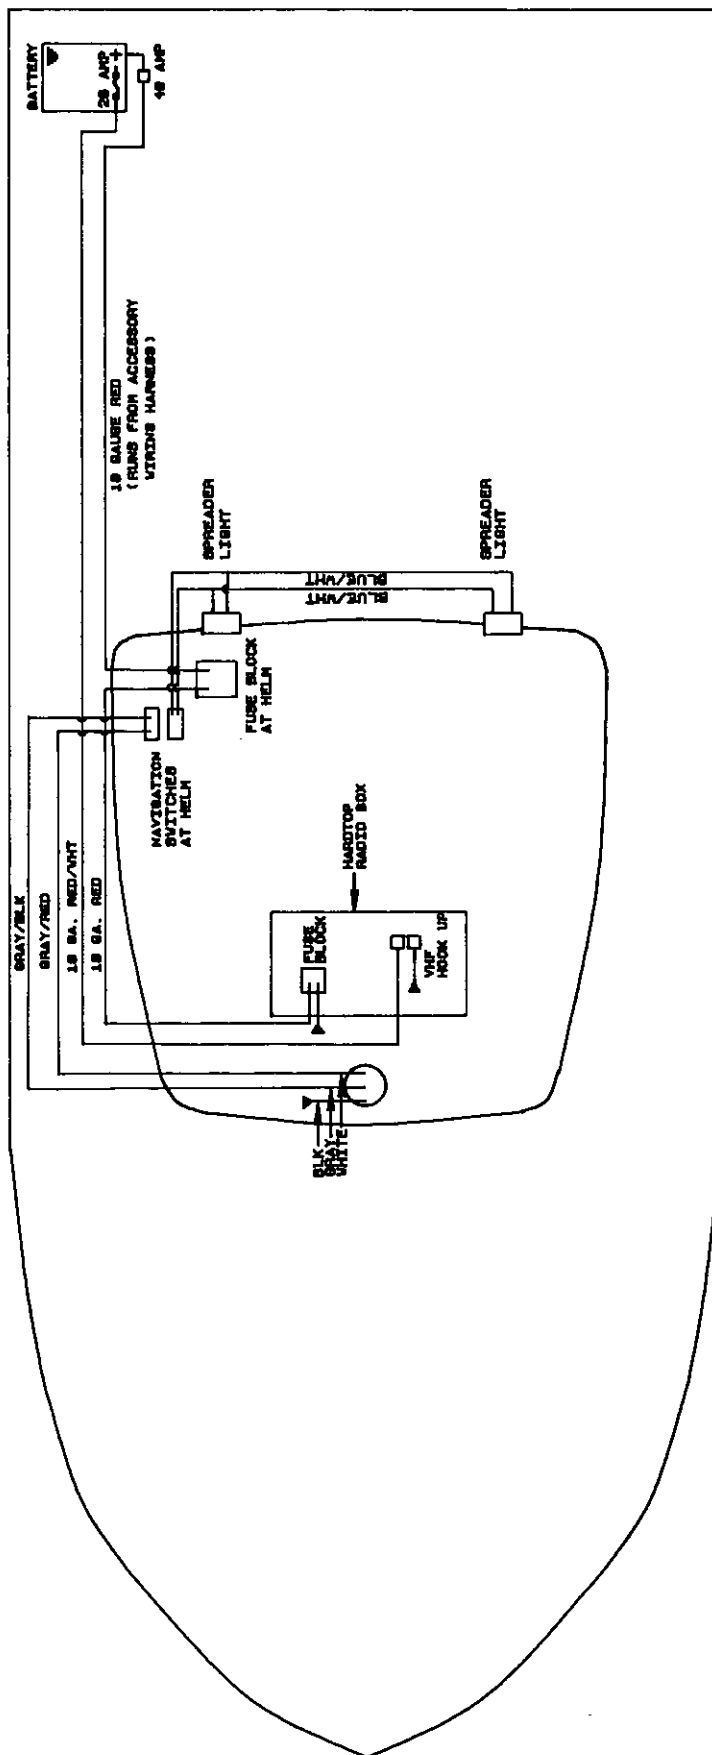



Hardtop Wiring Diagram (All Models Except 25' Sailfish Series)

25 SAILFISH

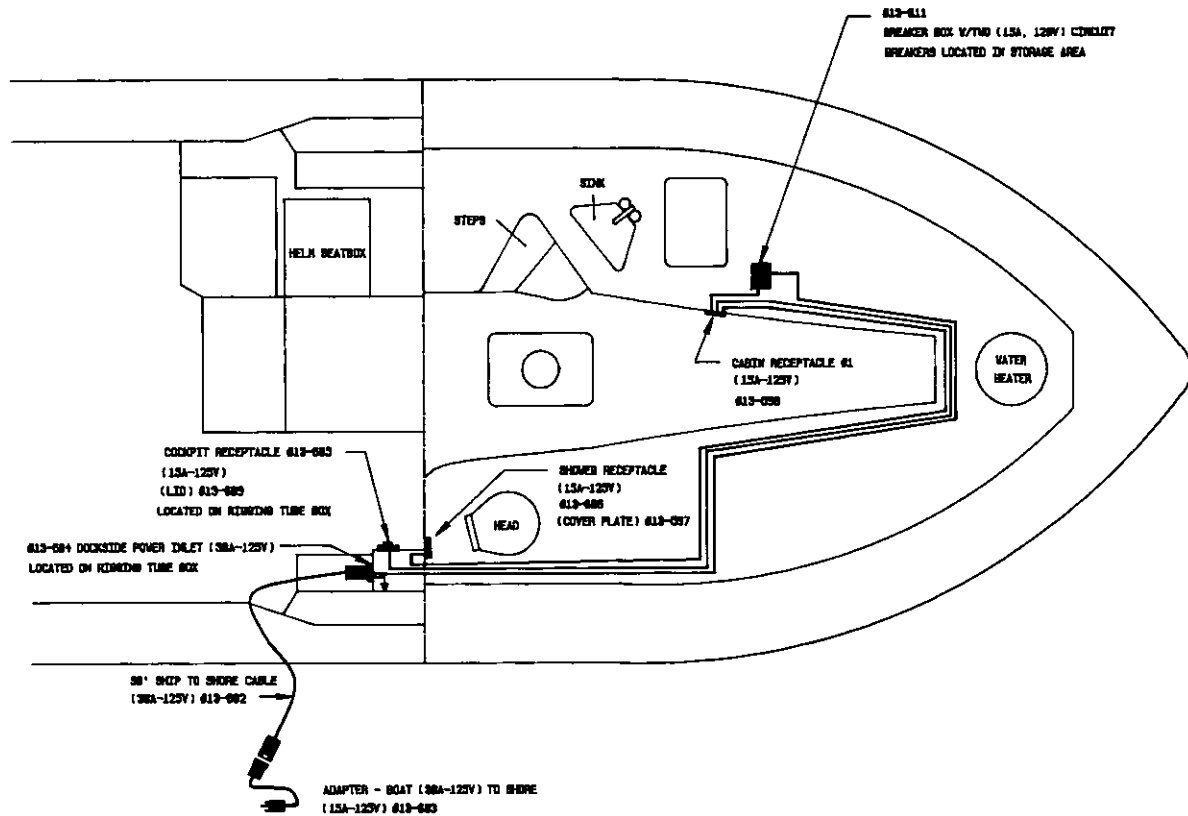

25 TROPHY PRO

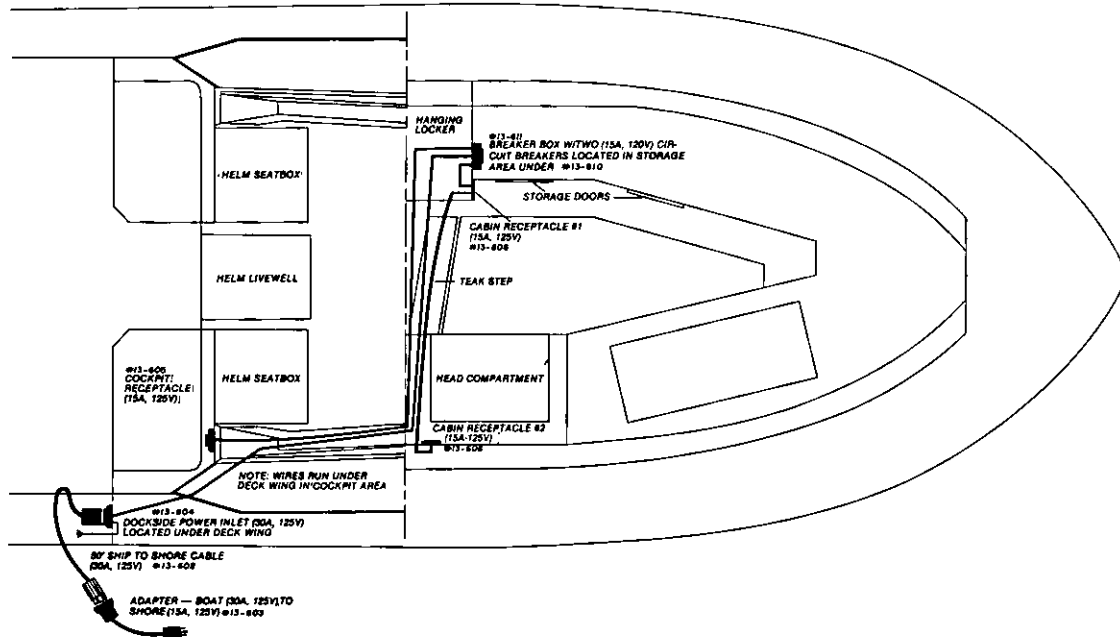

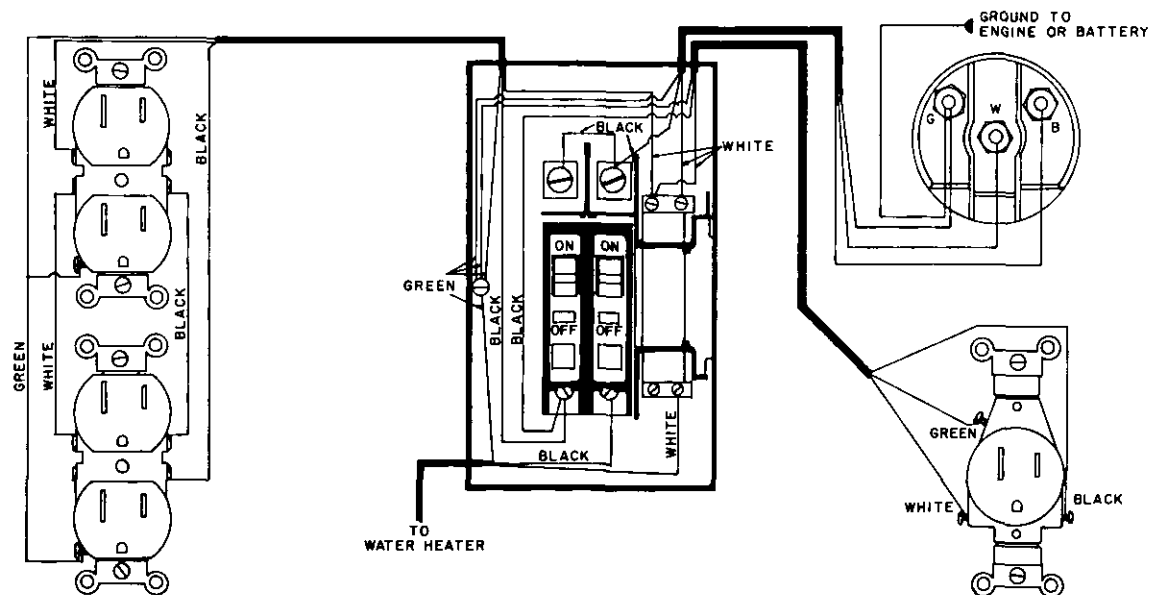

WARNING!

To Minimize Shock And Fire Hazards:


- (1) Turn Off The Boat's Shore Connection Switch Before Connecting Or Disconnecting Shore Cable.
- (2) Connect Shore-Power Cable At The Boat First.
- (3) Disconnect Shore-Power Cable At Shore-Outlet First.
- (4) Close Shore-Power Inlet Cover Tightly.

Do Not Alter Shore Power Cable Connectors.


Head Operating Instructions For 25' Sailfish Series

Follow these instructions for operation of the head flush knob.


1. Check to make sure the water inlet seacock, located in the forward bilge, is open.
2. To flush the toilet with water, see the instructions on the control knob. Pump the knob two to three times.
3. To flush the toilet dry, also see the instructions on the control knob. Pump until the waste is transferred to the holding tank.

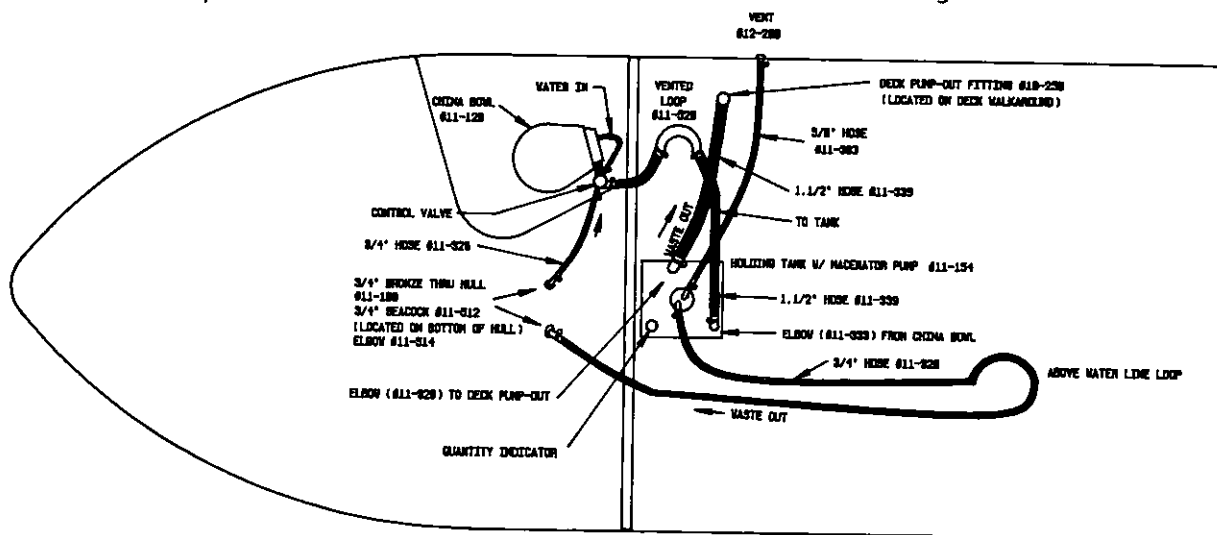


Plumbing

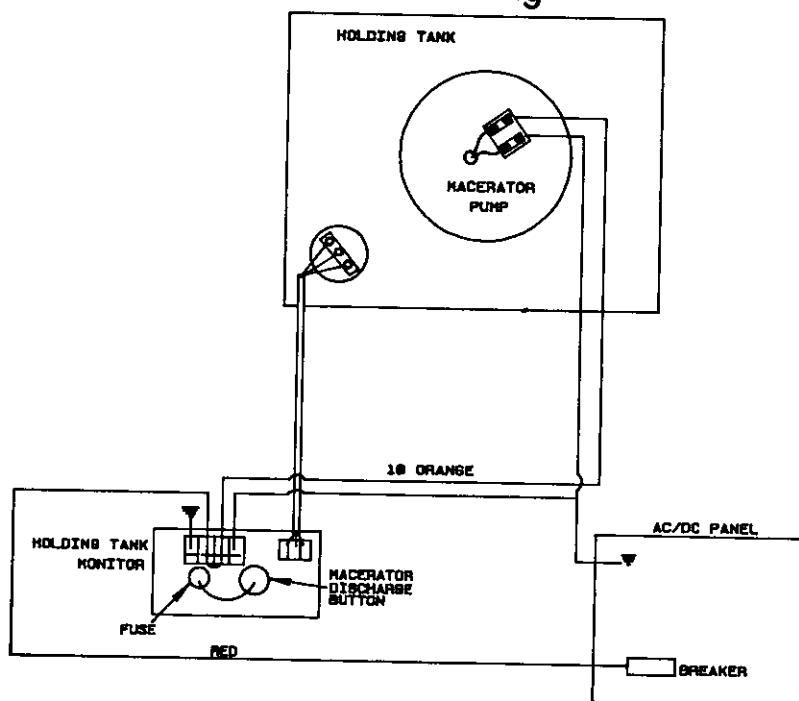


Wiring

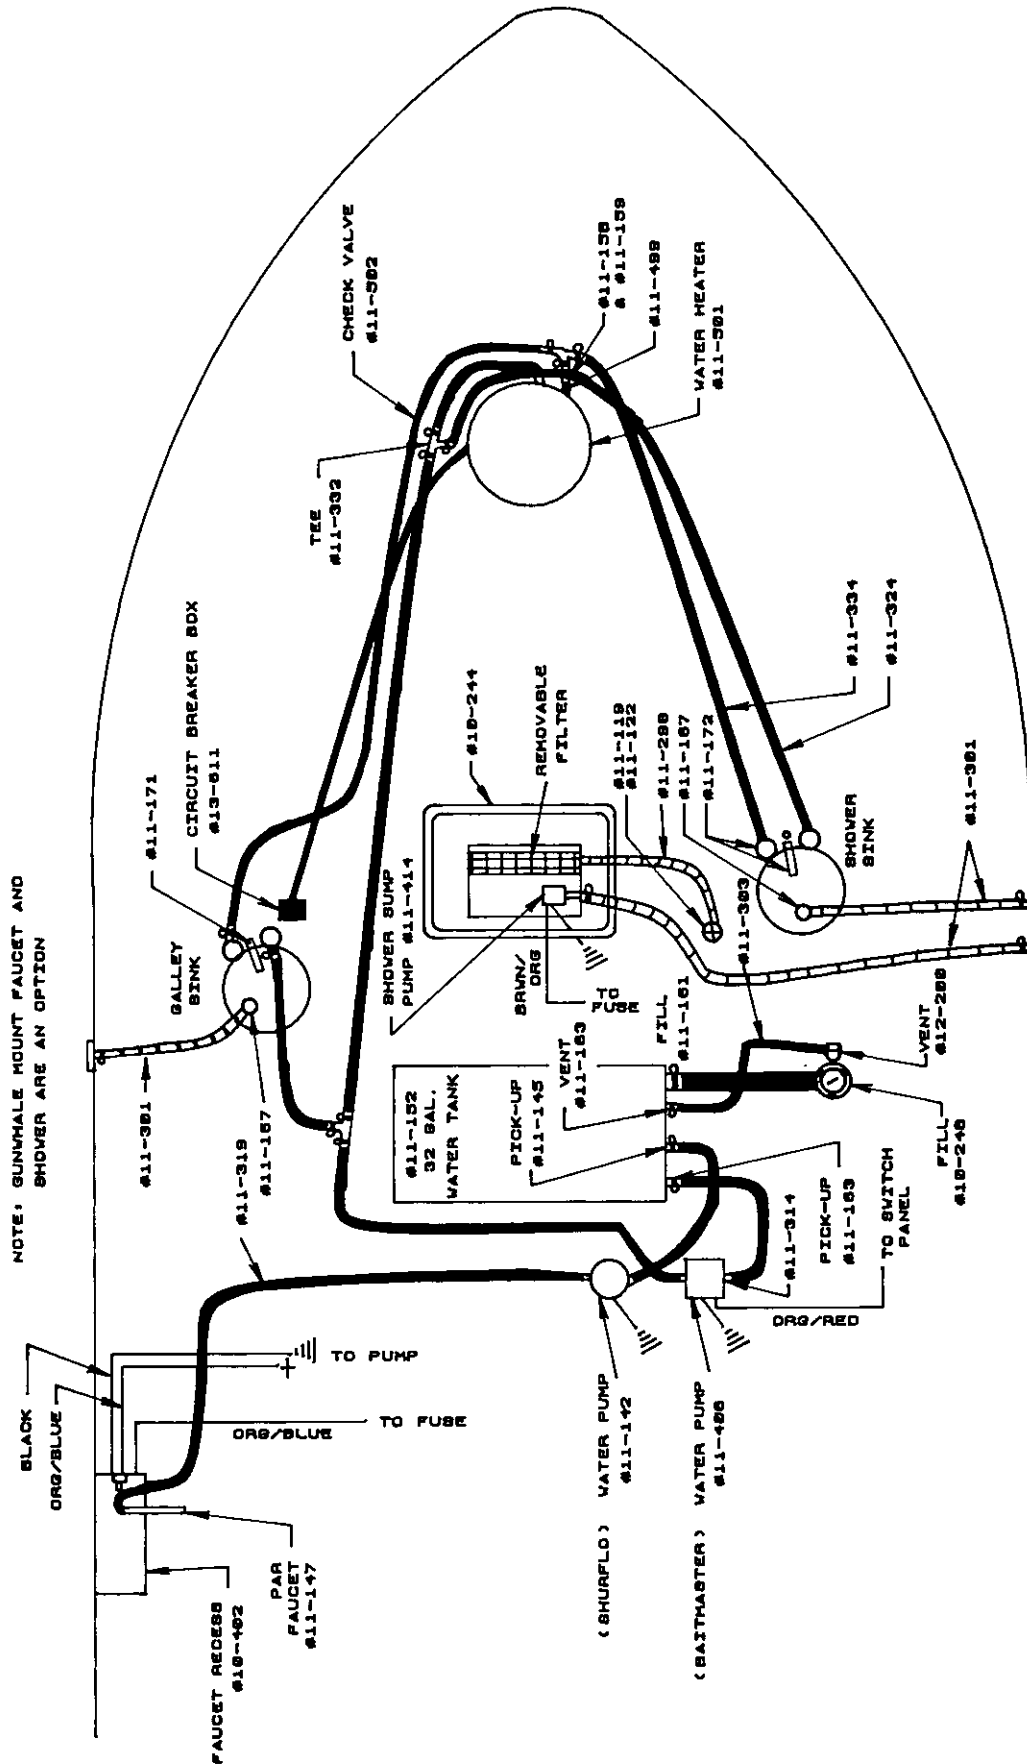


Fresh Water System (Pressurized): 25' Sailfish Series

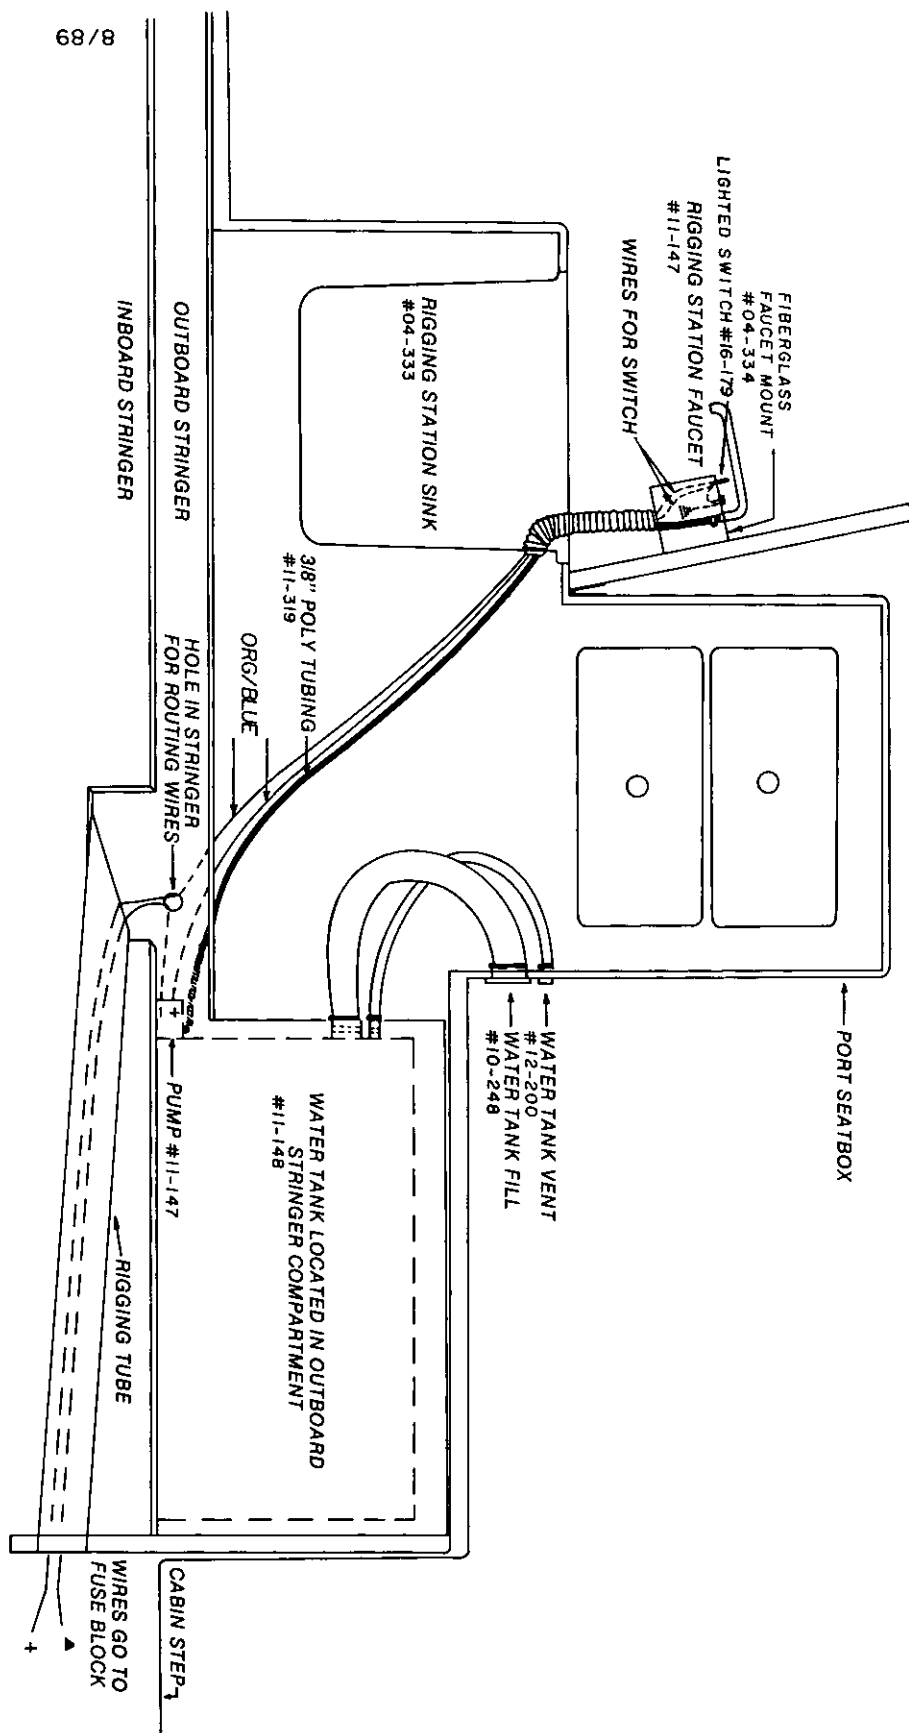


Fresh Water System (Pressurized): 25' Trophy Pro Series

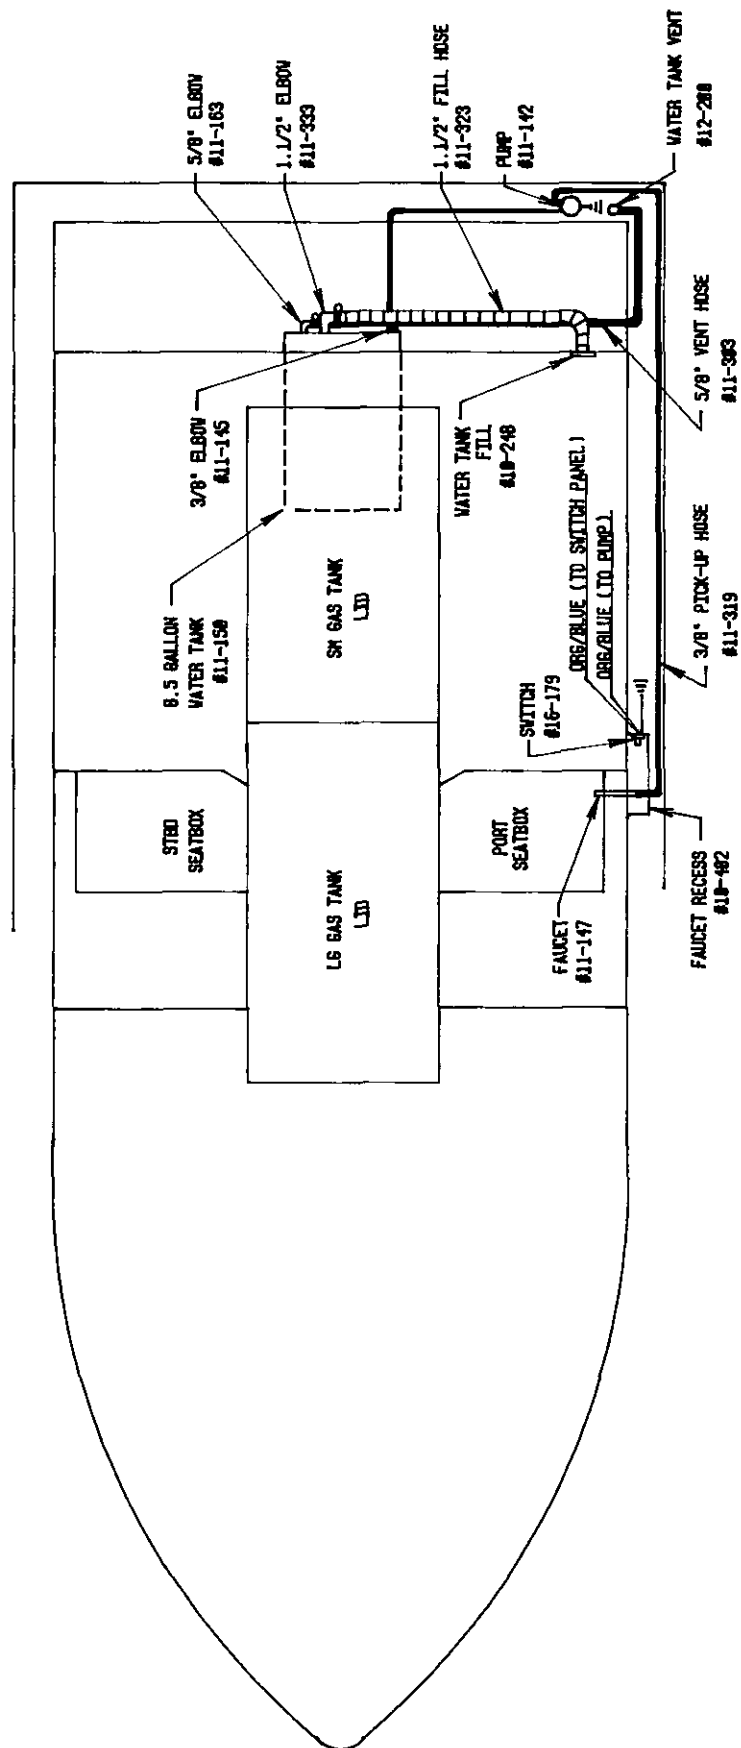


Fresh Water System for 22' Tournament

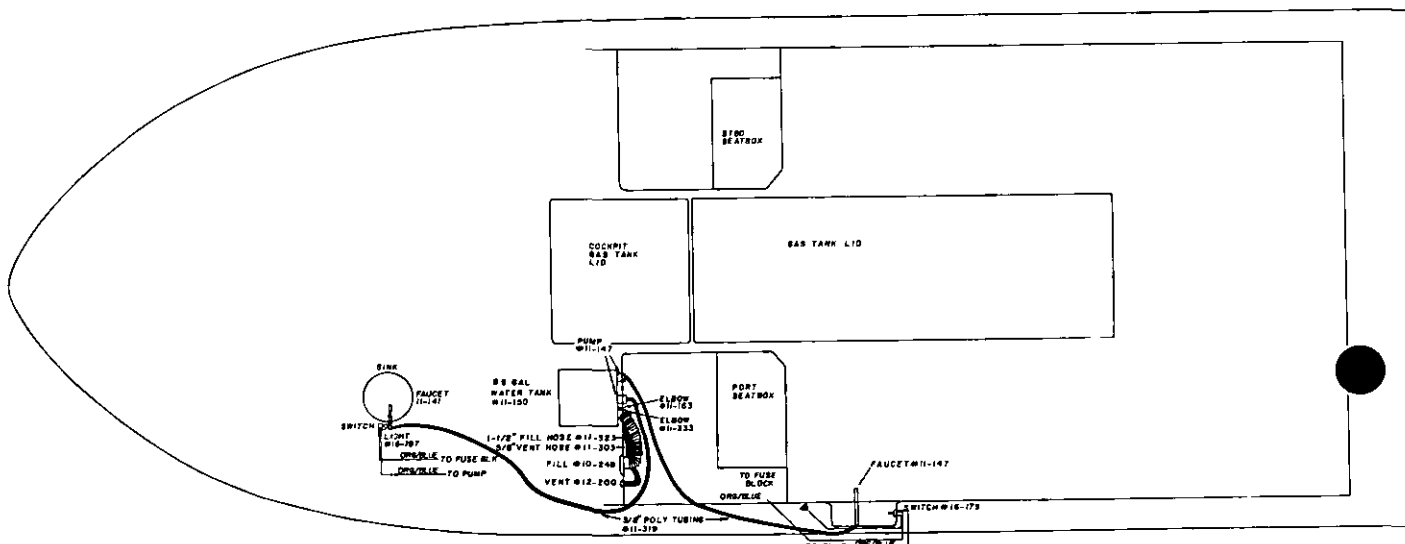


Fresh Water System (Pressurized): 20' 22' 23' 24' Series

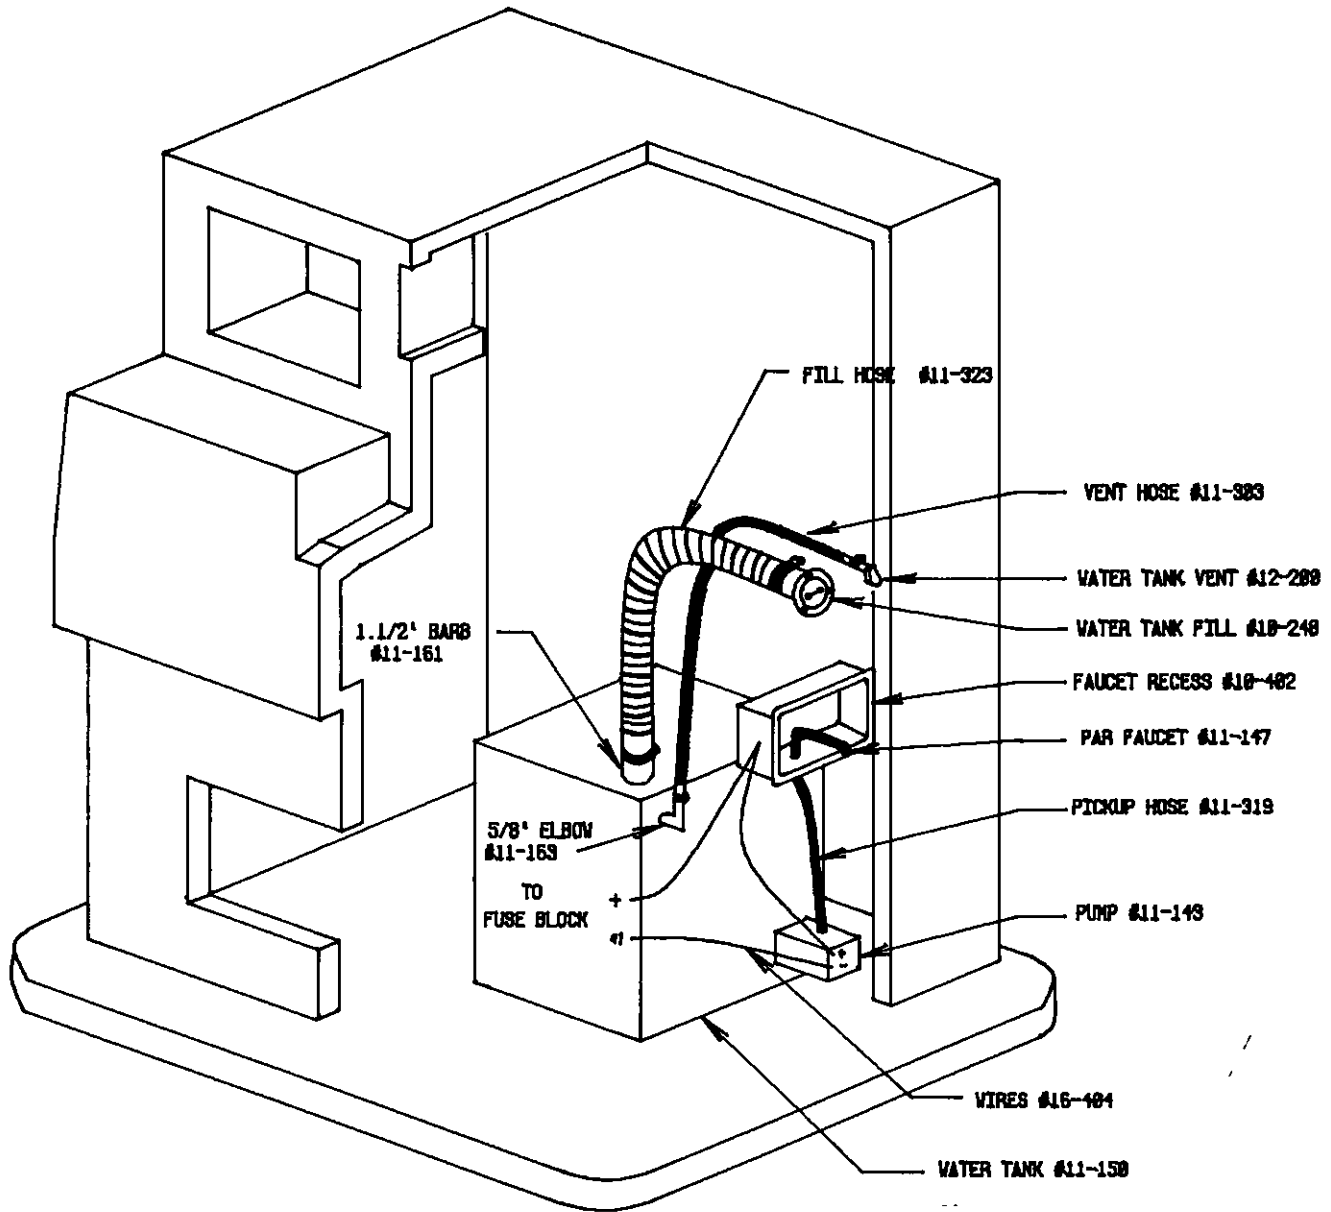


Washdown/Livewell System

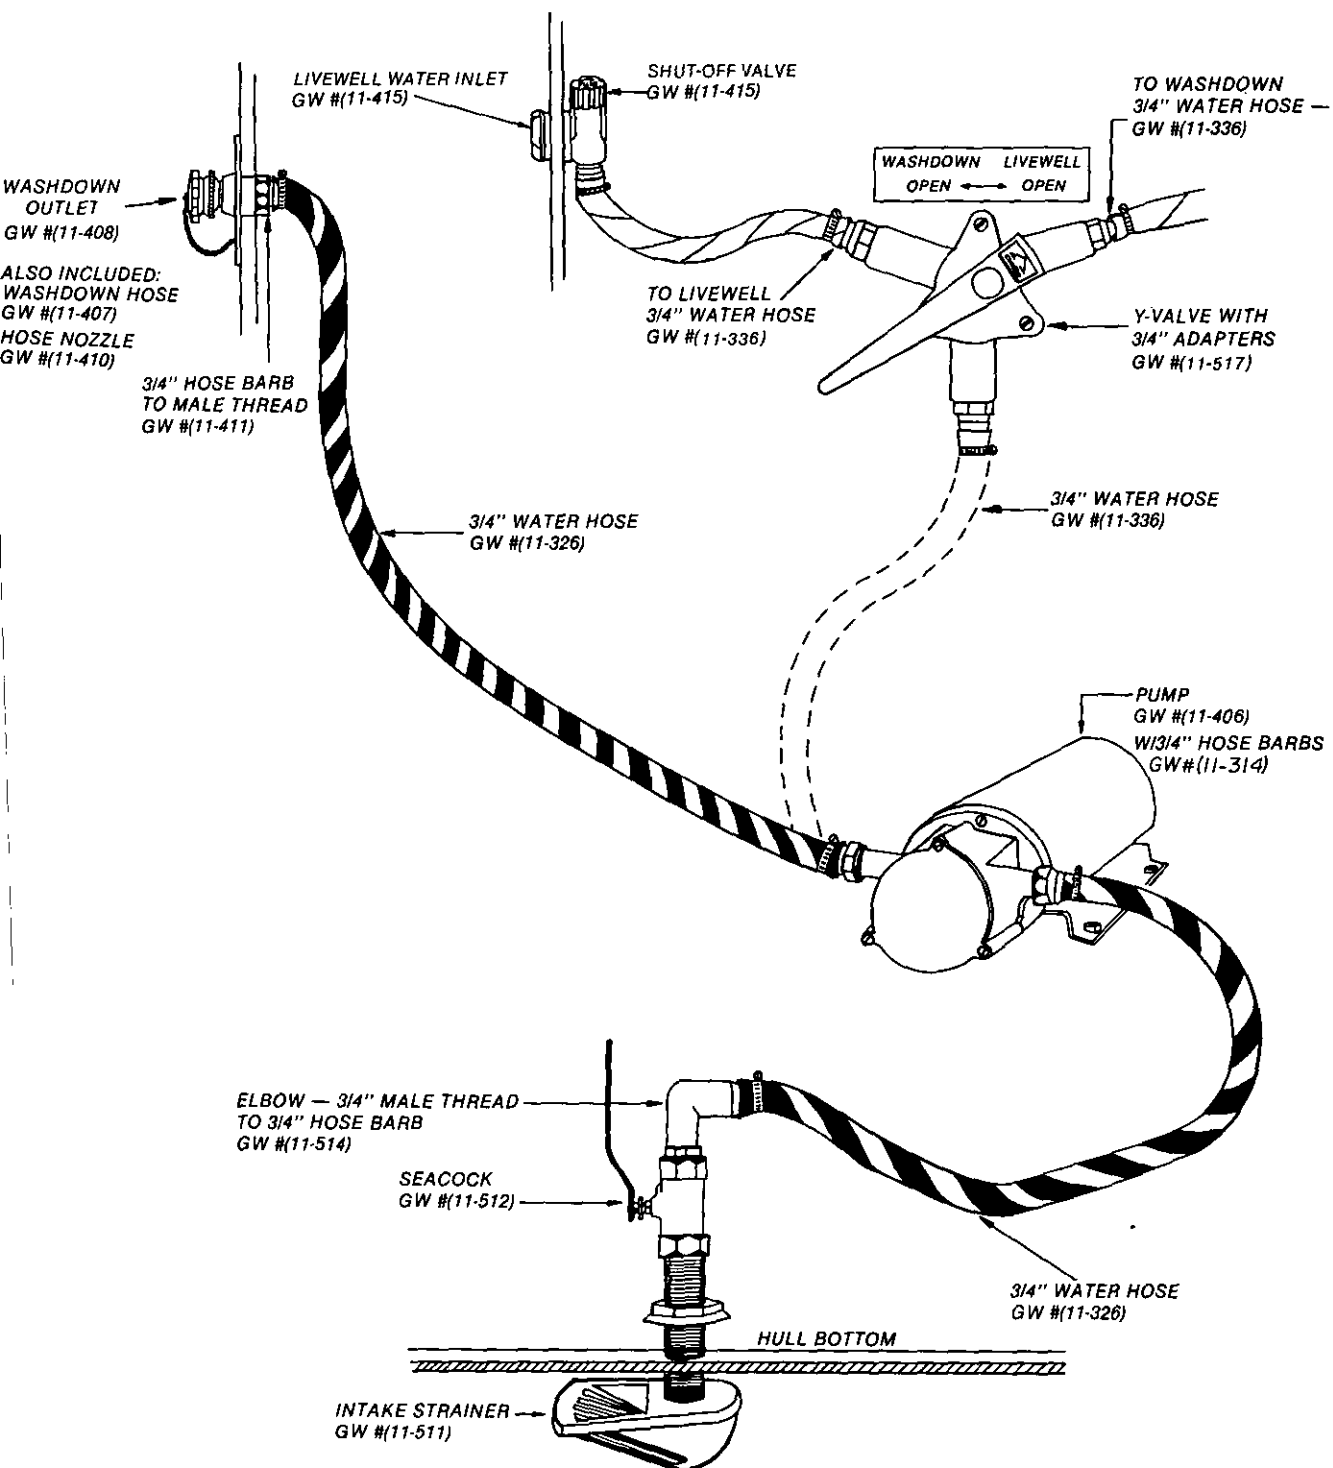

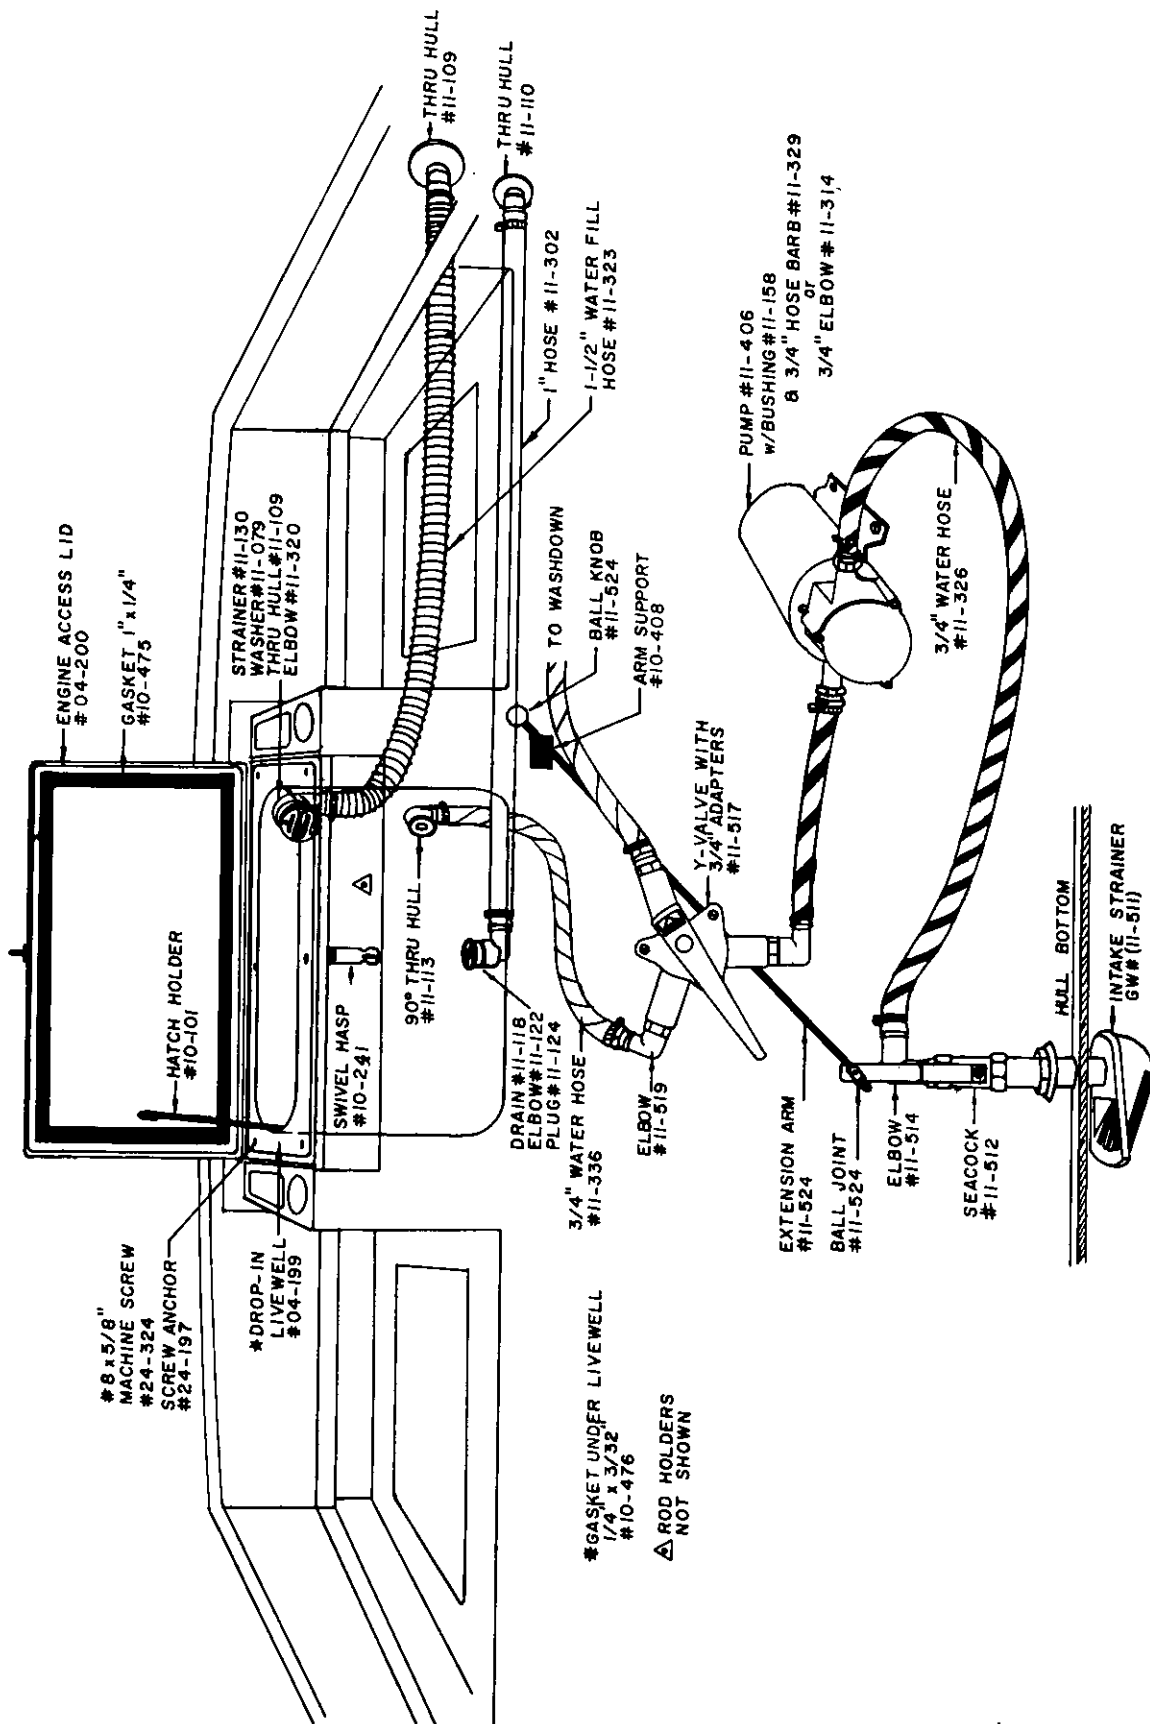

Engine Access Livewell

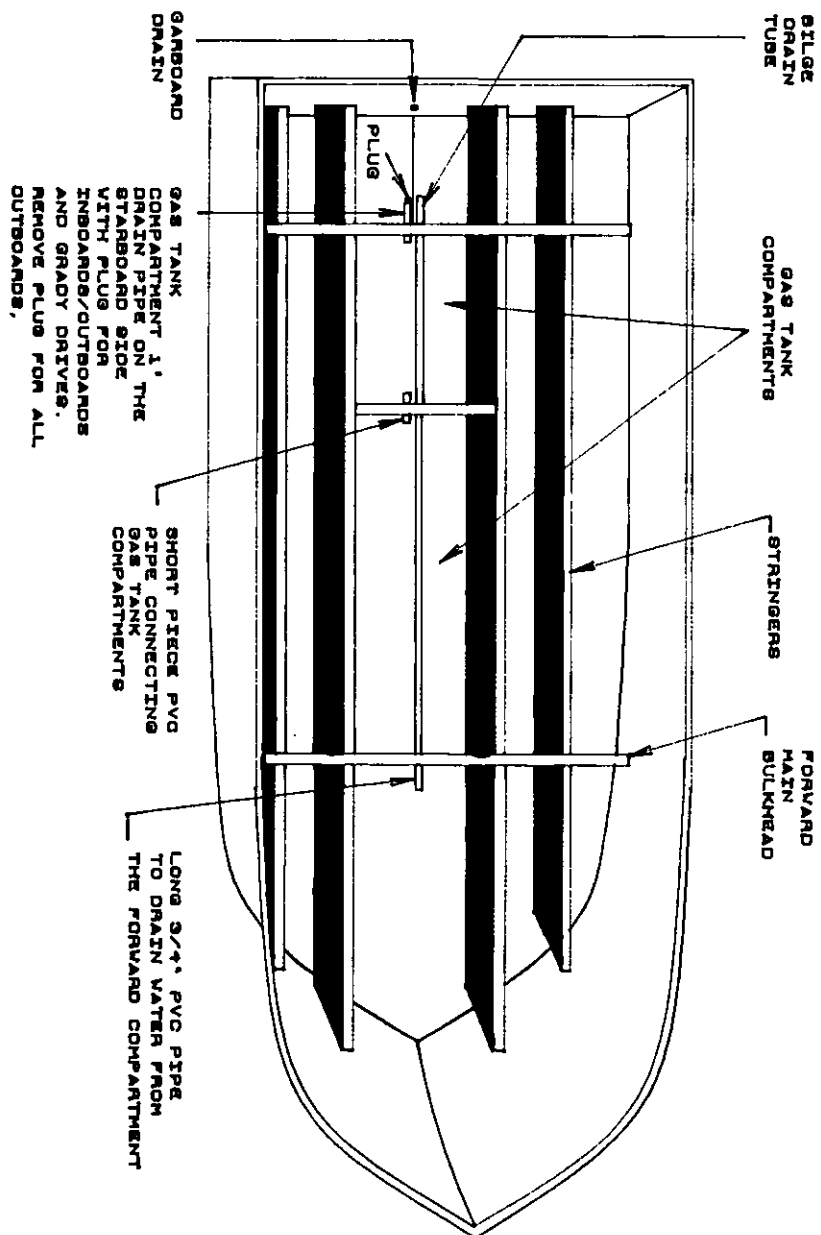


Typical Gas Tank Compartment Drainage

Grady-White Construction
Most Grady-Whites are built in three separate fiberglass pieces, the hull, the deck and the fiberglass liner as shown below. These three pieces are bonded together after installation of standard through-bolted hardware, electrical systems, gas tanks and foam floatation.

The deck
All standard hardware is mounted and secured with through bolts and locking nuts before being installed in the boat. The deck is then placed on the hull/liner and secured all around.


The fiberglass liner
The fiberglass liner of your Grady-White is removed from its mold then all fishboxes and ice boxes are insulated with foam. The liner is then placed in the hull, the deck placed over both, and all three are bonded then secured with stainless steel screws all around.

The hull
The wooden stringer system in your Grady-White is encapsulated in resin and fiberglass then fiberglassed into place while the hull is still in its mold. This gives your hull permanent strength and shape. Foam floatation is sprayed into strategic cavities between the stringers to add floatation, strength and sound absorption.

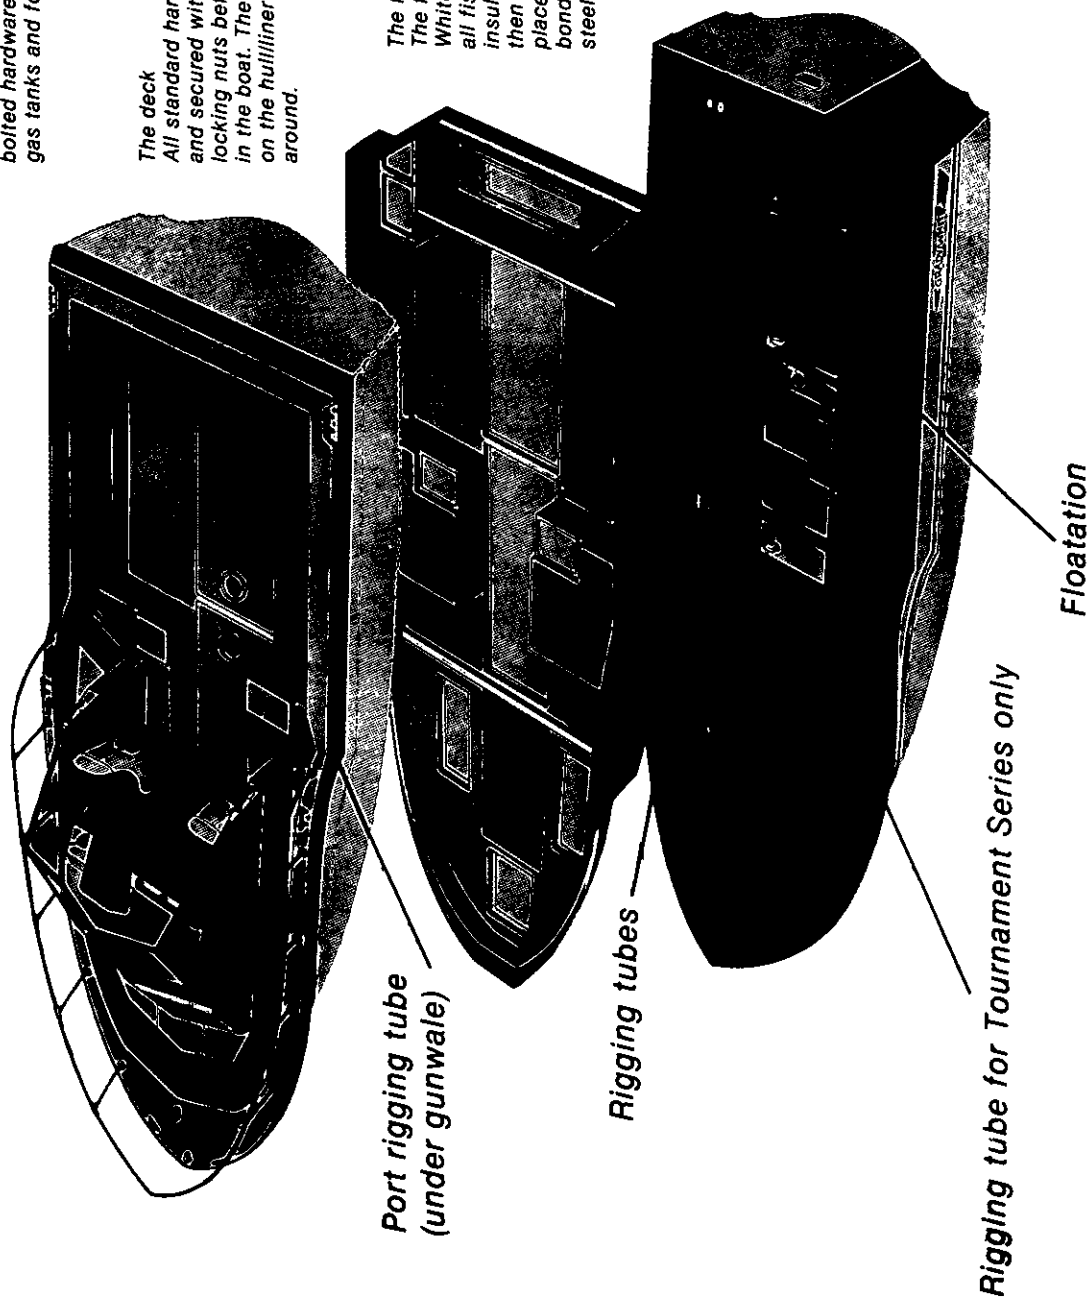

Hull/Deck/Liner Layout

commonly used nautical terms:

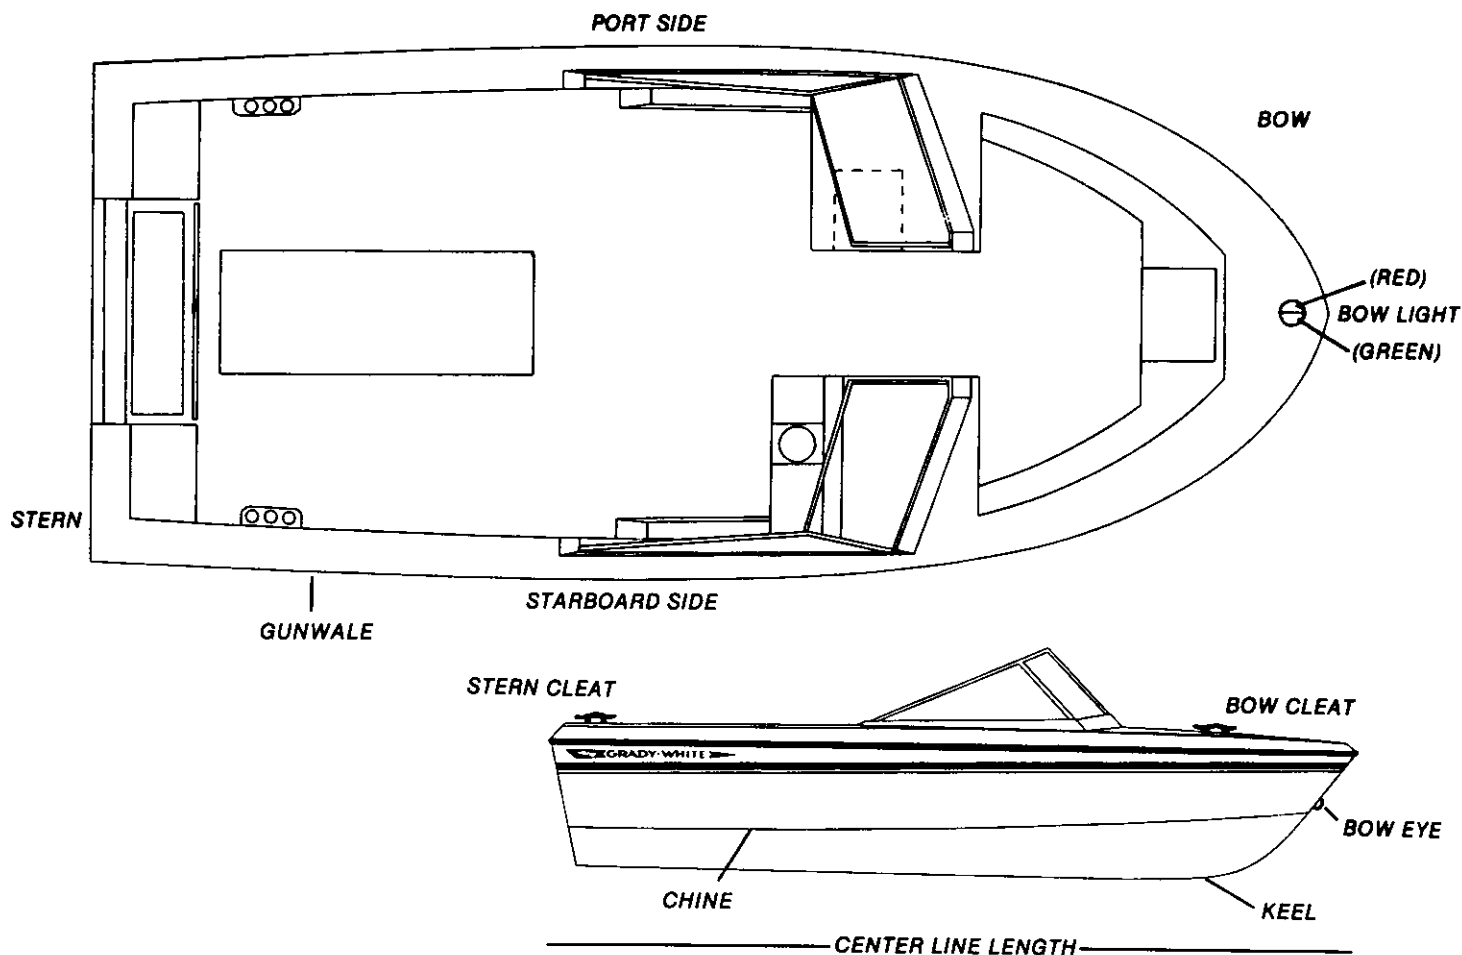

abeam — object 90 degrees to center line on either side of boat

abaft — a point on a boat that is aft of another

aft — toward the rear or stern of the boat

beam — the greatest width of a boat

bilge — the lower interior area of the hull

bow — the fore part of a boat

bulkhead — vertical partition in a boat

chine — meeting juncture of topside and bottom of boat

chock — deck fitting, used as guides for mooring or anchor lines

cleat — deck fitting with arms or horns on which lines may be made fast

deck — upper structure which covers the hull

draft — depth of water required to float boat

fathom — six feet

freeboard — height of topside from water line to the deck

gunwale (or gunnel) — meeting junction of hull and deck

hatch — an opening in the deck to provide access below

head — a toilet or toilet area in a boat

headroom — vertical distance between the deck and cabin or canopy top

hull — the basic part of a boat; a watertight vessel that provides buoyancy to float the weight of the craft and its load

keel — the major longitudinal member of a hull — the lowest external portion of a boat

knot — unit of speed in nautical miles per hour

lee — the side that is sheltered from the wind

port — opening in a hull to admit light and air or lateral directions — term designating left side of the boat

port light — a hinge or sliding port in a boat hull

scupper — holes permitting water to drain overboard from deck or cockpit

sheer — curve or sweep of the deck as viewed from the side

starboard — lateral direction term designating right side of the boat

stern — the aft end of a boat

stringer — longitudinal members fastened inside the hull for additional structural strength

wake — disturbed water that a boat leaves behind as a result of the motion

windward — toward the direction from which the wind is blowing

LIMITED WARRANTY

REGISTRATION OF PURCHASE: The "Federal Boat Safety Act of 1971" requires all boat manufacturers to maintain a record of all first retail purchasers and their current address for the purpose of notification in case of defective parts or equipment, or in case of non-compliance with standards or regulations set forth by this act. Under the act, failure to complete and return your factory warranty card for our records will waive your right to notification of defect and/or repair at manufacturers expense.

THREE YEAR HULL WARRANTY

Grady-White warrants to the original retail purchaser of each new Grady-White Boat that under normal use the hull will be free from structural defects for a period of three years from the date of delivery to the original retail purchaser. Any structural defects covered by the warranty will be repaired free of charge at either the Grady-White factory in Greenville, North Carolina, or at an authorized Grady-White dealer location as elected by Grady-White. Transportation to and from the point of repair will be the responsibility of the owner with all repairs subject to prior written authorization by Grady-White Boats, Incorporated. **NO BOAT IS TO BE SENT TO THE GRADY-WHITE FACTORY WITHOUT SUCH WRITTEN AUTHORITY.**

ONE YEAR MATERIAL AND WORKMANSHIP WARRANTY

Grady-White further warrants to the original retail purchaser of each Grady-White boat that under normal use it will be free from defects in workmanship and material for a period of 12 months from the date of delivery to the original retail purchaser. Necessary repairs under this warranty will be made free of charge at Grady-White's factory in Greenville, North Carolina or at an authorized Grady-White dealer as elected by Grady-White. **NO BOAT OR PART THEREOF IS TO BE SENT TO THE GRADY-WHITE FACTORY WITHOUT SUCH WRITTEN AUTHORITY.**

EXCLUSIONS

This warranty specifically does not include the following:

1. Damage caused by abuse, negligence, vandalism, lack of maintenance, improper storage or accident.
2. Any statements, representations, or warranties given by dealers or other third persons other than those provided within this warranty.
3. Any unit which is part of a rental fleet, used for racing or commercial purposes.
4. The following consequential damages: a) loss of time; b) inconvenience; c) towing charges; d) expenses for travel, lodging, telephone, and gasoline; e) loss or damage to personal property or loss of revenue; f) loss of use of the boat.
5. This warranty specifically does not apply to engines, outdrives, propellers, controls, mechanical steering, bilge pumps, and any other part expressly warranted by the manufacturer thereof. In addition, also excluded are gel coat cracking, gel coat crazing, gel coat blistering or fading, chrome, windshields, glass breakage, all vinyl upholstery and canvas, instruments and gauges, and leakage around windshields, windows, hatches, and other apertures.
6. Any boat which has been overpowered according to the maximum Grady-White recommended engine horsepower specifications on the capacity plate affixed to the boat.

WARRANTY CLAIM PROCEDURES

Upon the discovery of a defect, the owner is to promptly contact the Grady-White dealer, from whom the owner purchased the boat who will effect the corrective action under this warranty upon prior written authorization from Grady-White Boats, Incorporated.

THESE WARRANTIES ARE EXPRESSLY MADE IN LIEU OF ALL OTHER WARRANTIES. DURATION OF ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE SHALL BE LIMITED TO AND COINCIDENT WITH THE DURATION OF THESE EXPRESSED WARRANTIES.

THIS WARRANTY SHALL NOT BE VALID UNLESS THE FACTORY WARRANTY POSTCARD IS PROPERLY EXECUTED AND MAILED WITHIN 10 DAYS OF THE PURCHASE OF YOUR GRADY-WHITE BOAT.

GRADY-WHITE BOATS, INC.
P.O. Box 1527
Greenville, N.C. 27834